


Please call 435-563-6507 x 25 a minimum of 24 hours prior to the following inspections:

- Footing
- Foundation
- Underground plumbing / Mechanical
- Rough Frame / mechanical / plumbing / electrical
- Insulation
- Water Barrier / flashing
- Final

For Public Works / Sewer connection, sidewalks and approaches call Brett 435-563-0179

THIS PLAN TO REMAIN
ON CONSTRUCTION SITE
AT ALL TIMES

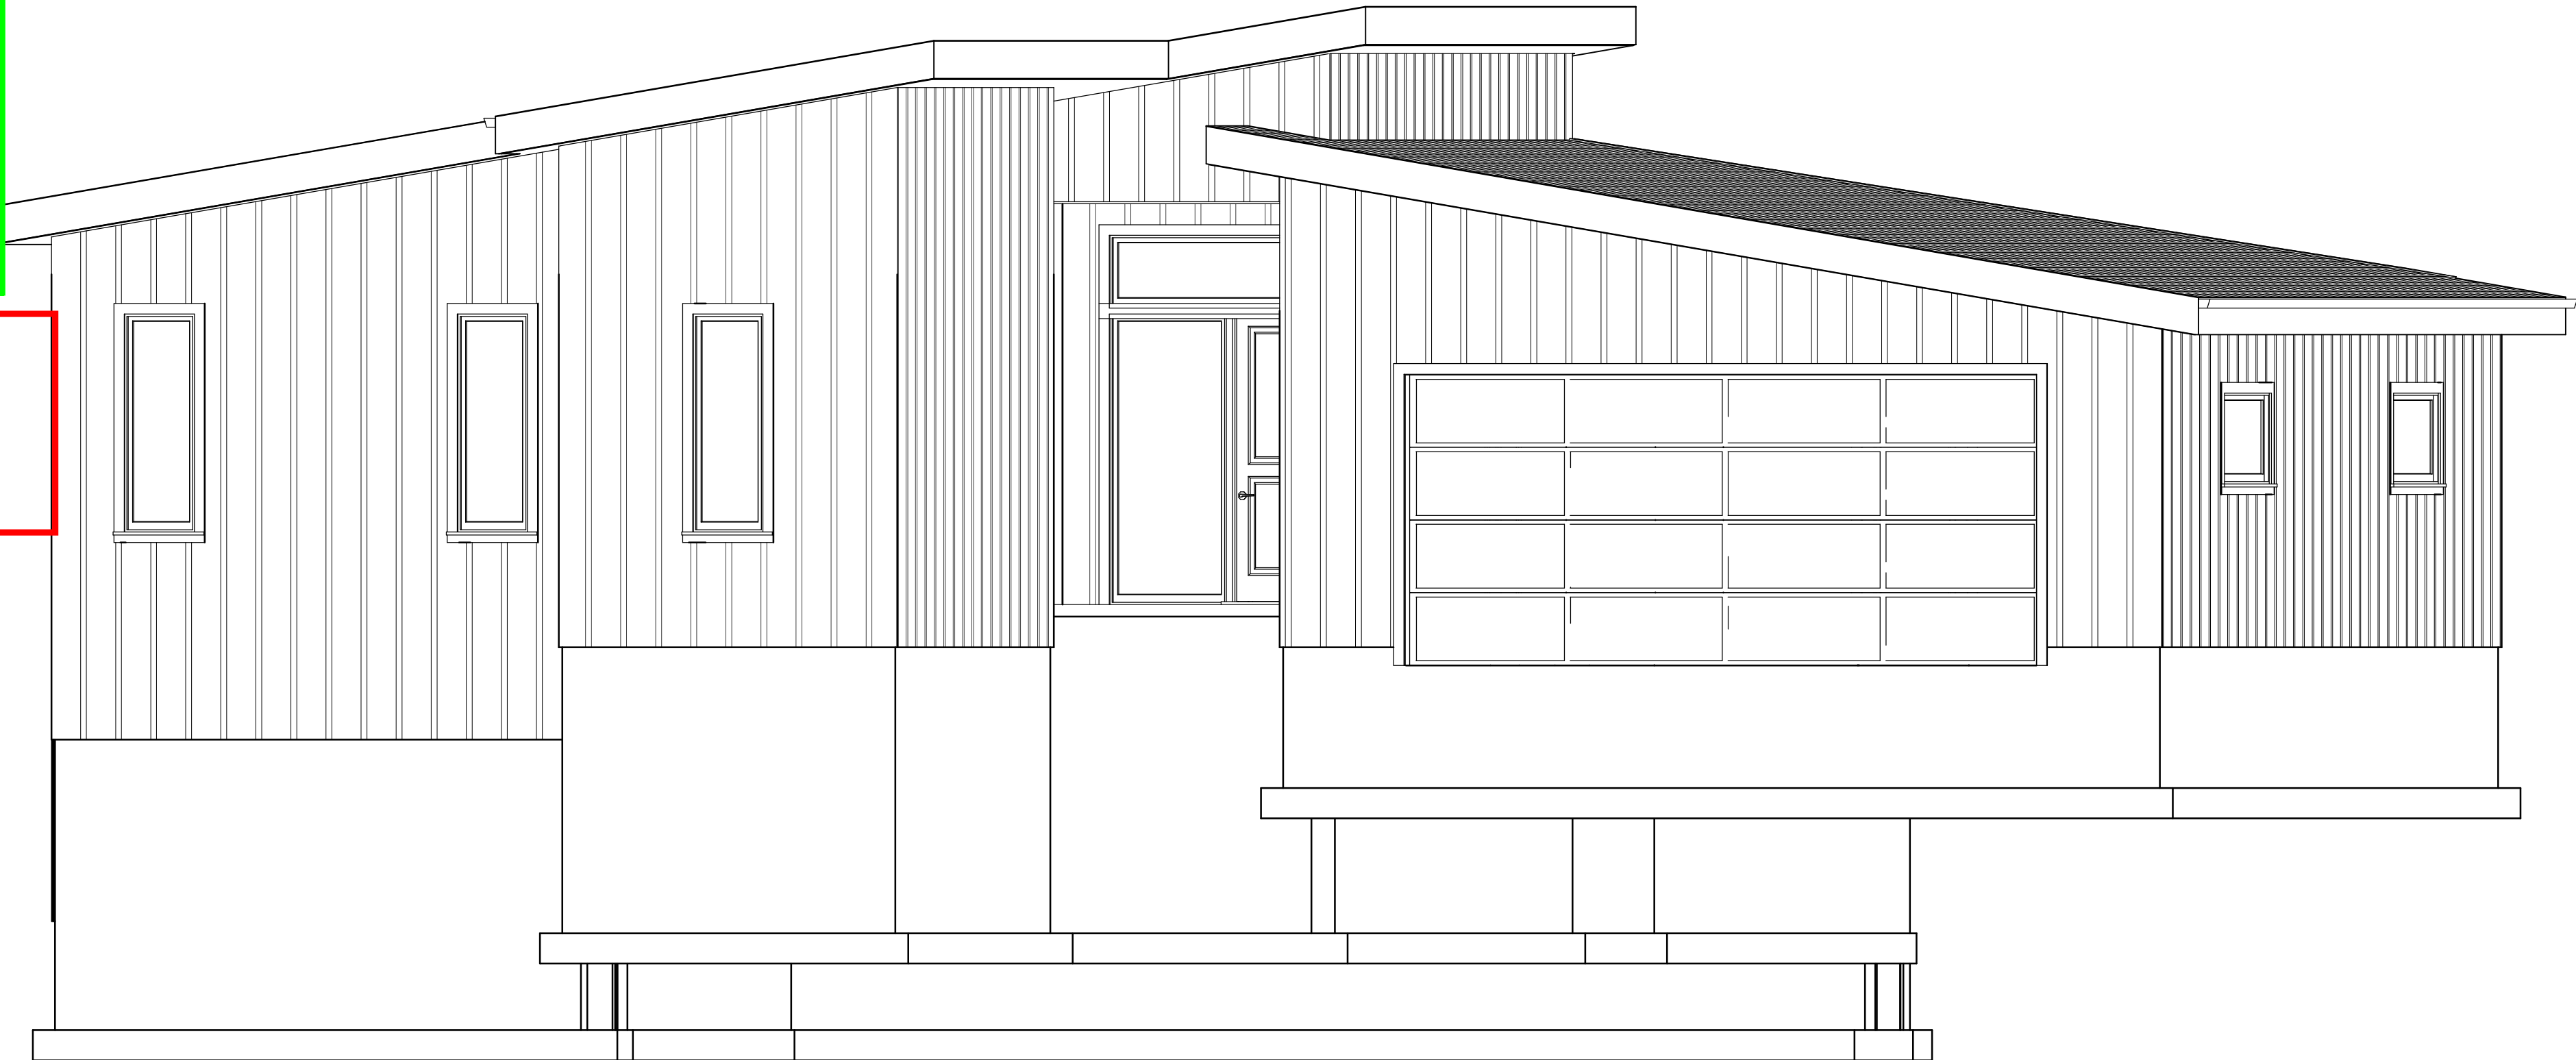

DANIEL BURT
1165 EAST 3100 NORTH
NORTH LOGAN, UT

To the best of my knowledge these plans are drawn to comply with owner's and/ or builder's specifications and any changes made on them after prints are made will be done at the owner's and / or builder's expense and responsibility. The contractor shall verify all dimensions and enclosed drawing. Davidson Home Design is not liable for errors once construction has begun. While every effort has been made in the preparation of this plan to avoid mistakes, the maker cannot guarantee against human error. The contractor of the job must check all dimensions and other details prior to construction and be solely responsible thereafter. All calculations and member sizing should be verified for your building by a certified building official.

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025


PAGE	LABEL
1	TITLE PAGE
2	BASEMENT PLAN
3	MAIN FLOOR PLAN
4	ELEVATIONS
5	ELEVATIONS
6	ROOF PLAN
7	HOUSE SECTION
8	FLOOR FRAMING
9	STAIR & KITCHEN DETAILS
10	ELECTRICAL PLANS
11	DETAILED HOUSE SECTION
12	PLOT PLAN

THE PURCHASE OF THESE PLANS PERMIT THE CUSTOMER A SINGLE USE LICENSE FOR THE CONSTRUCTION OF ONE HOUSE. THESE PLANS MAY NOT BE COPIED, RESOLD, OR MODIFIED.

BUILDING CONTRACTOR/HOME OWNER TO REVIEW AND VERIFY ALL DIMENSIONS, SPECS, AND CONNECTIONS BEFORE CONSTRUCTION BEGINS. HOME TO BE BUILT AS PER IRC, UBC OR CURRENT CODE

Note: Plans are half of stated scale if printed on 11x17 paper


WINDOW HEADER HEIGHTS
ARE 84" UNLESS NOTED

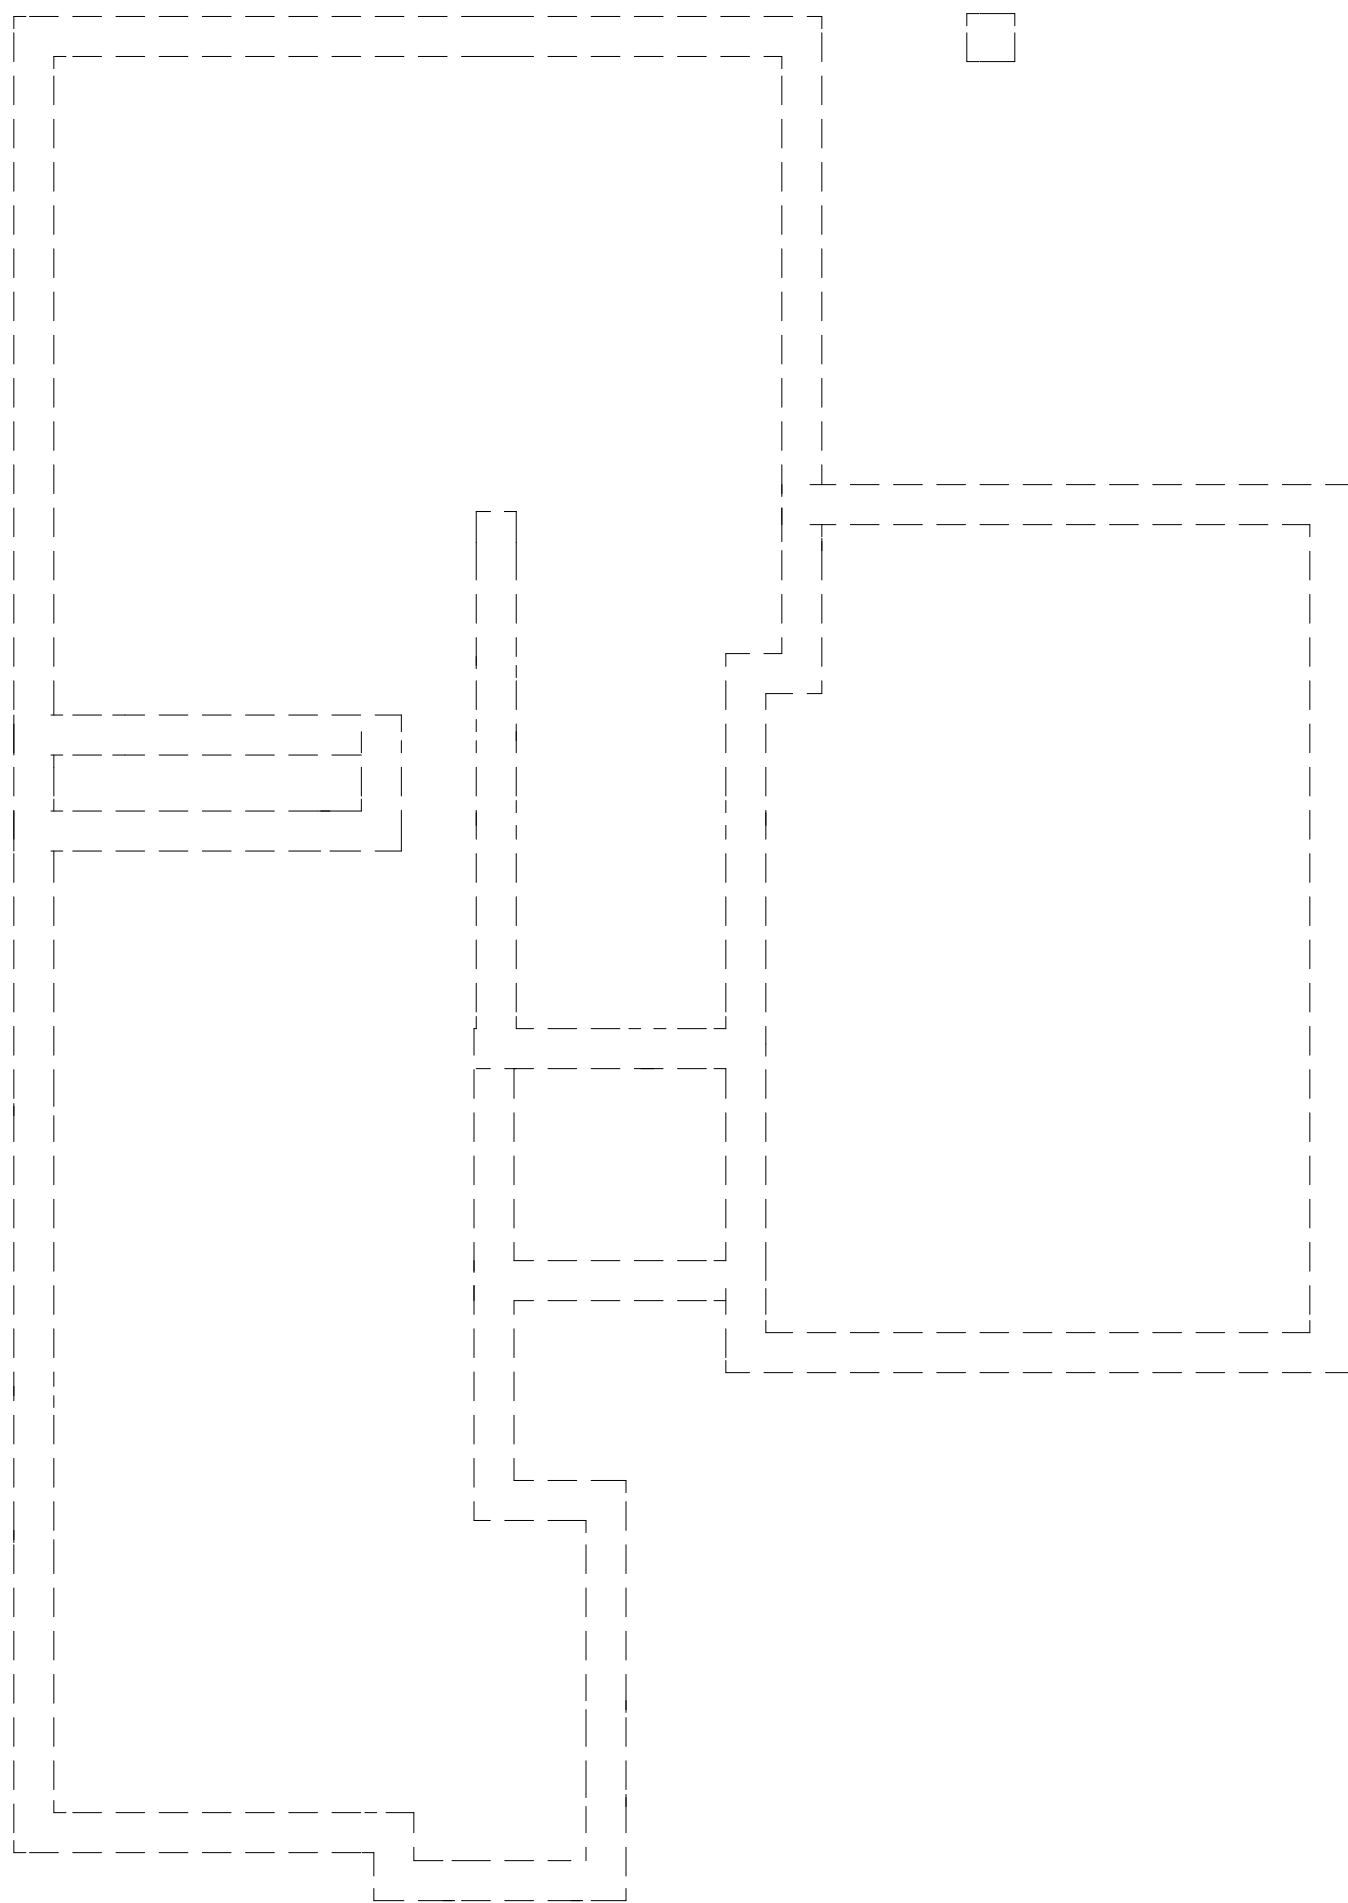

FOOTING REFERENCE
SCALE 1/8"=1'

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

BASEMENT PLAN - 8' CEILINGS
SCALE 1/4"=1'

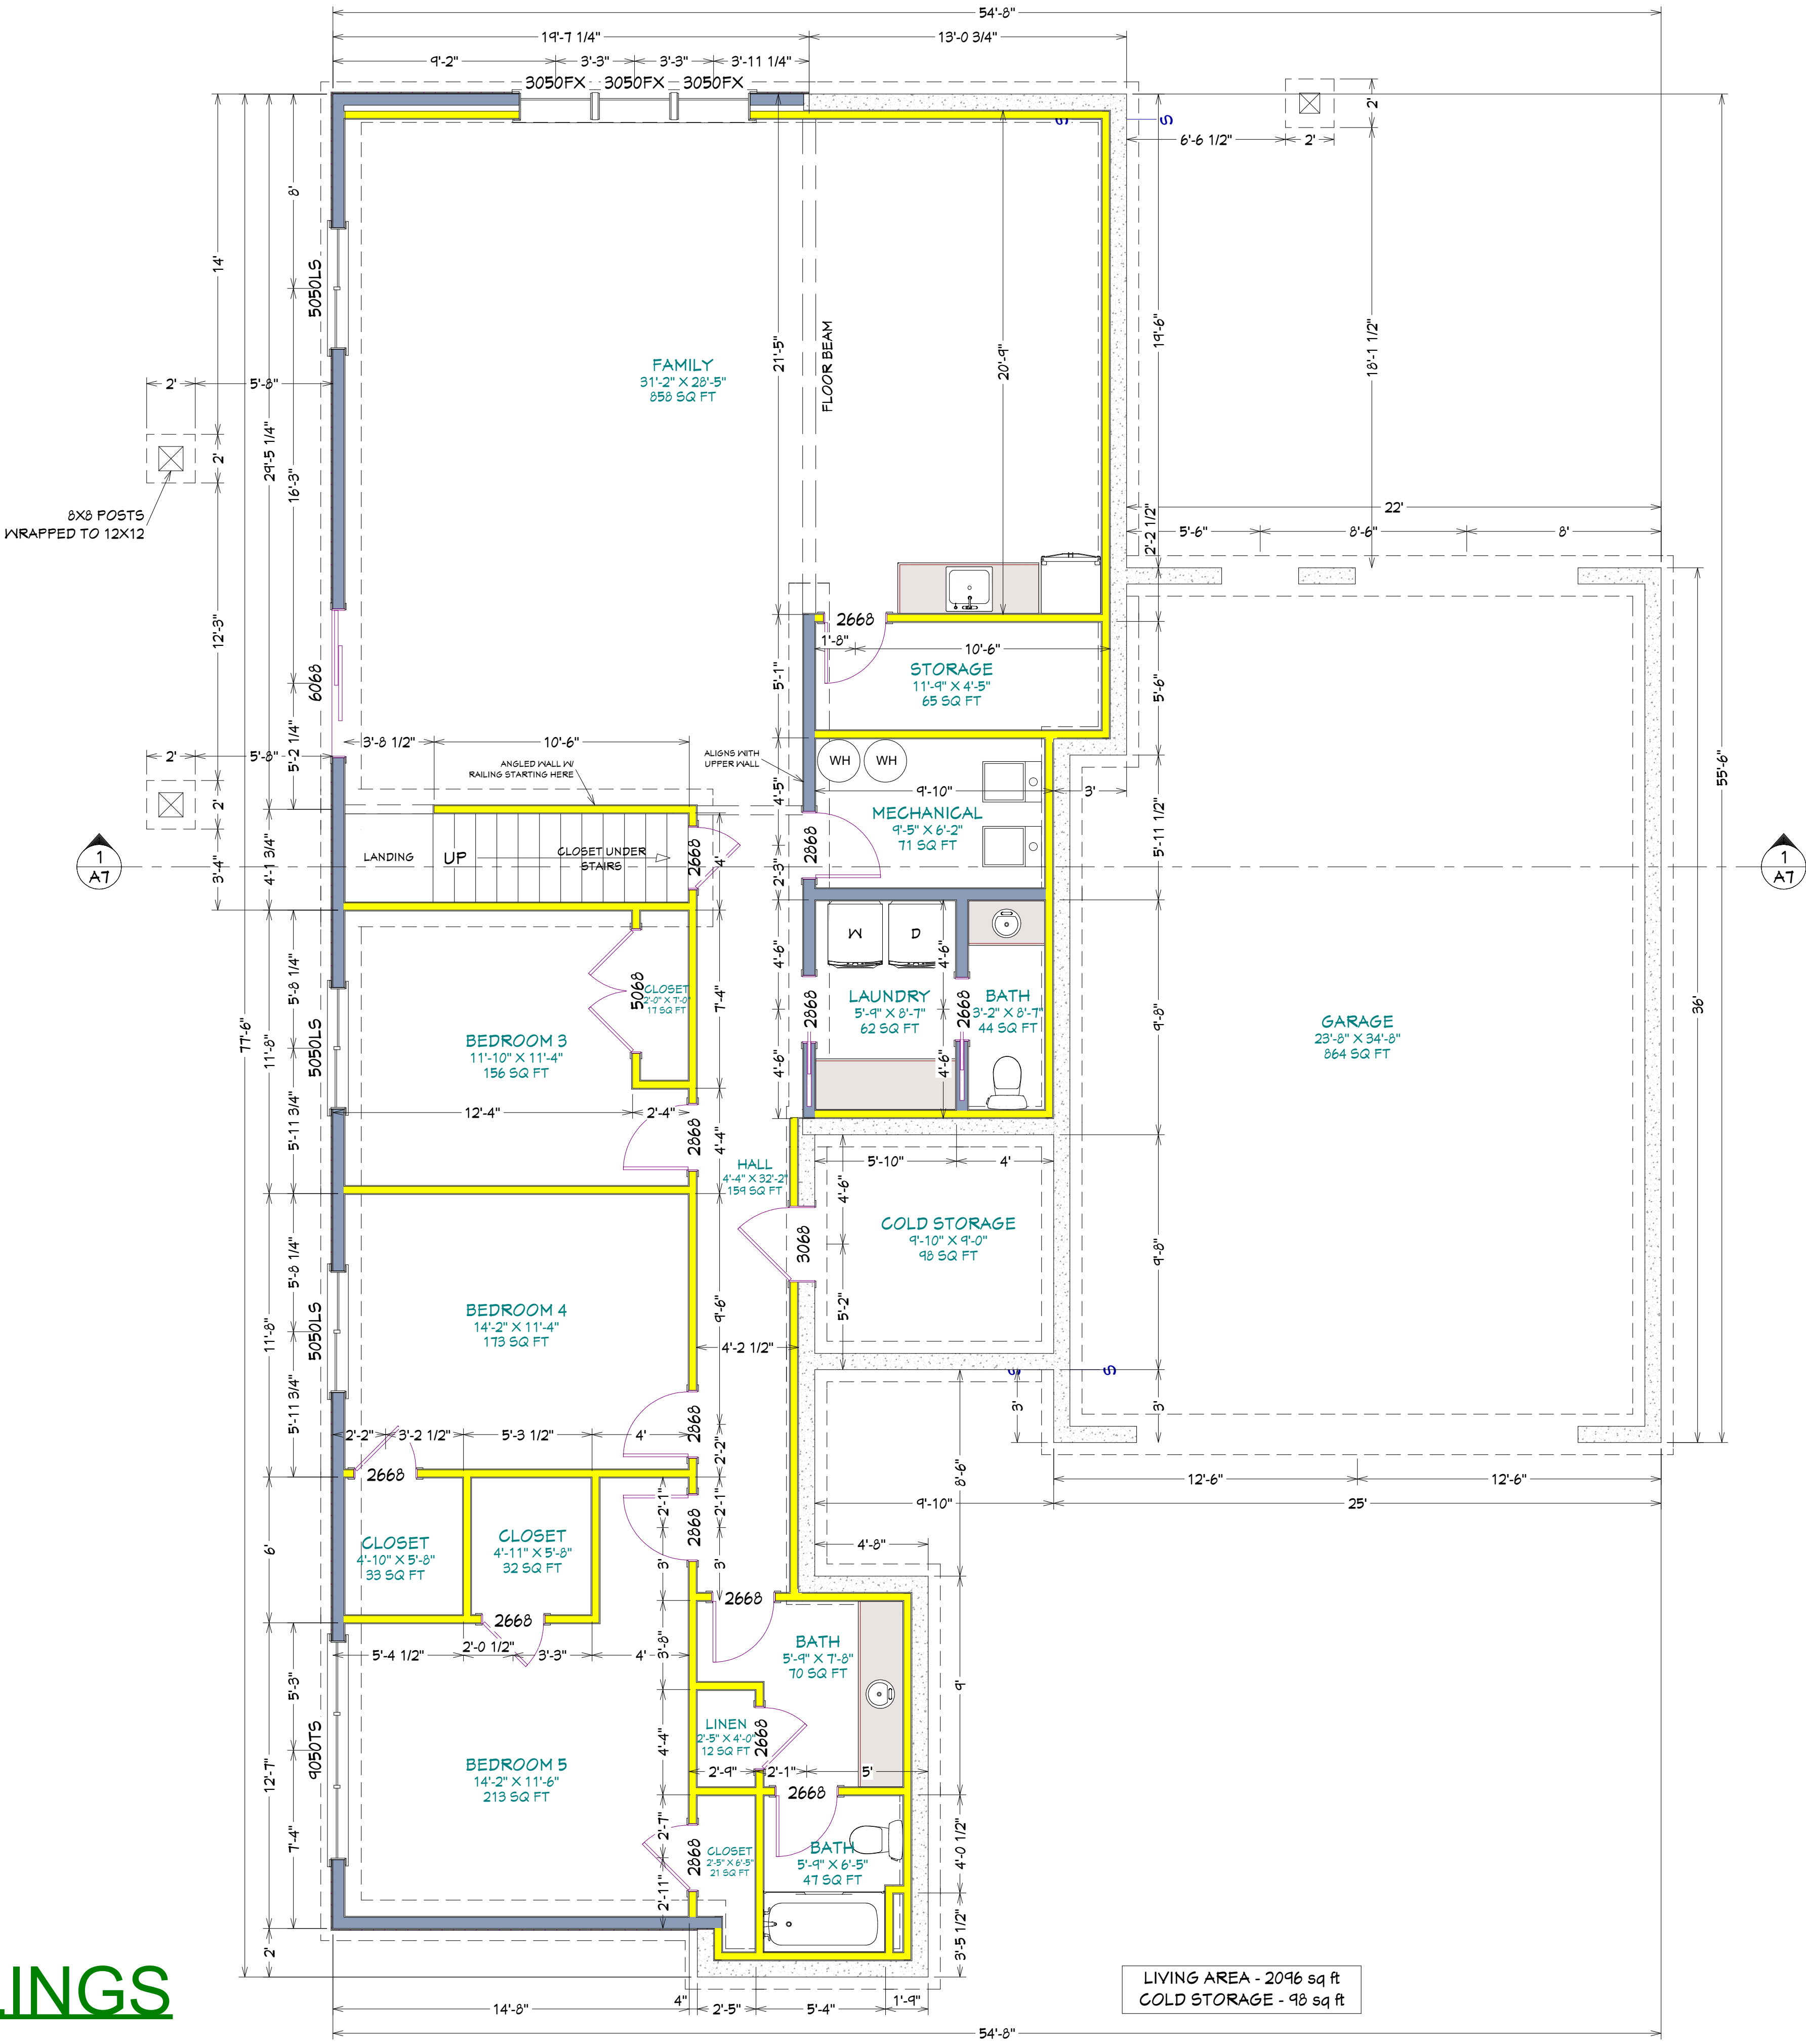


Note: Plans are half of stated scale if printed on 11x17 paper

WINDOW HEADER HEIGHTS
ARE 96" UNLESS NOTED

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

MAIN FLOOR PLAN - 9' CEILINGS

SCALE 1/4"=1'

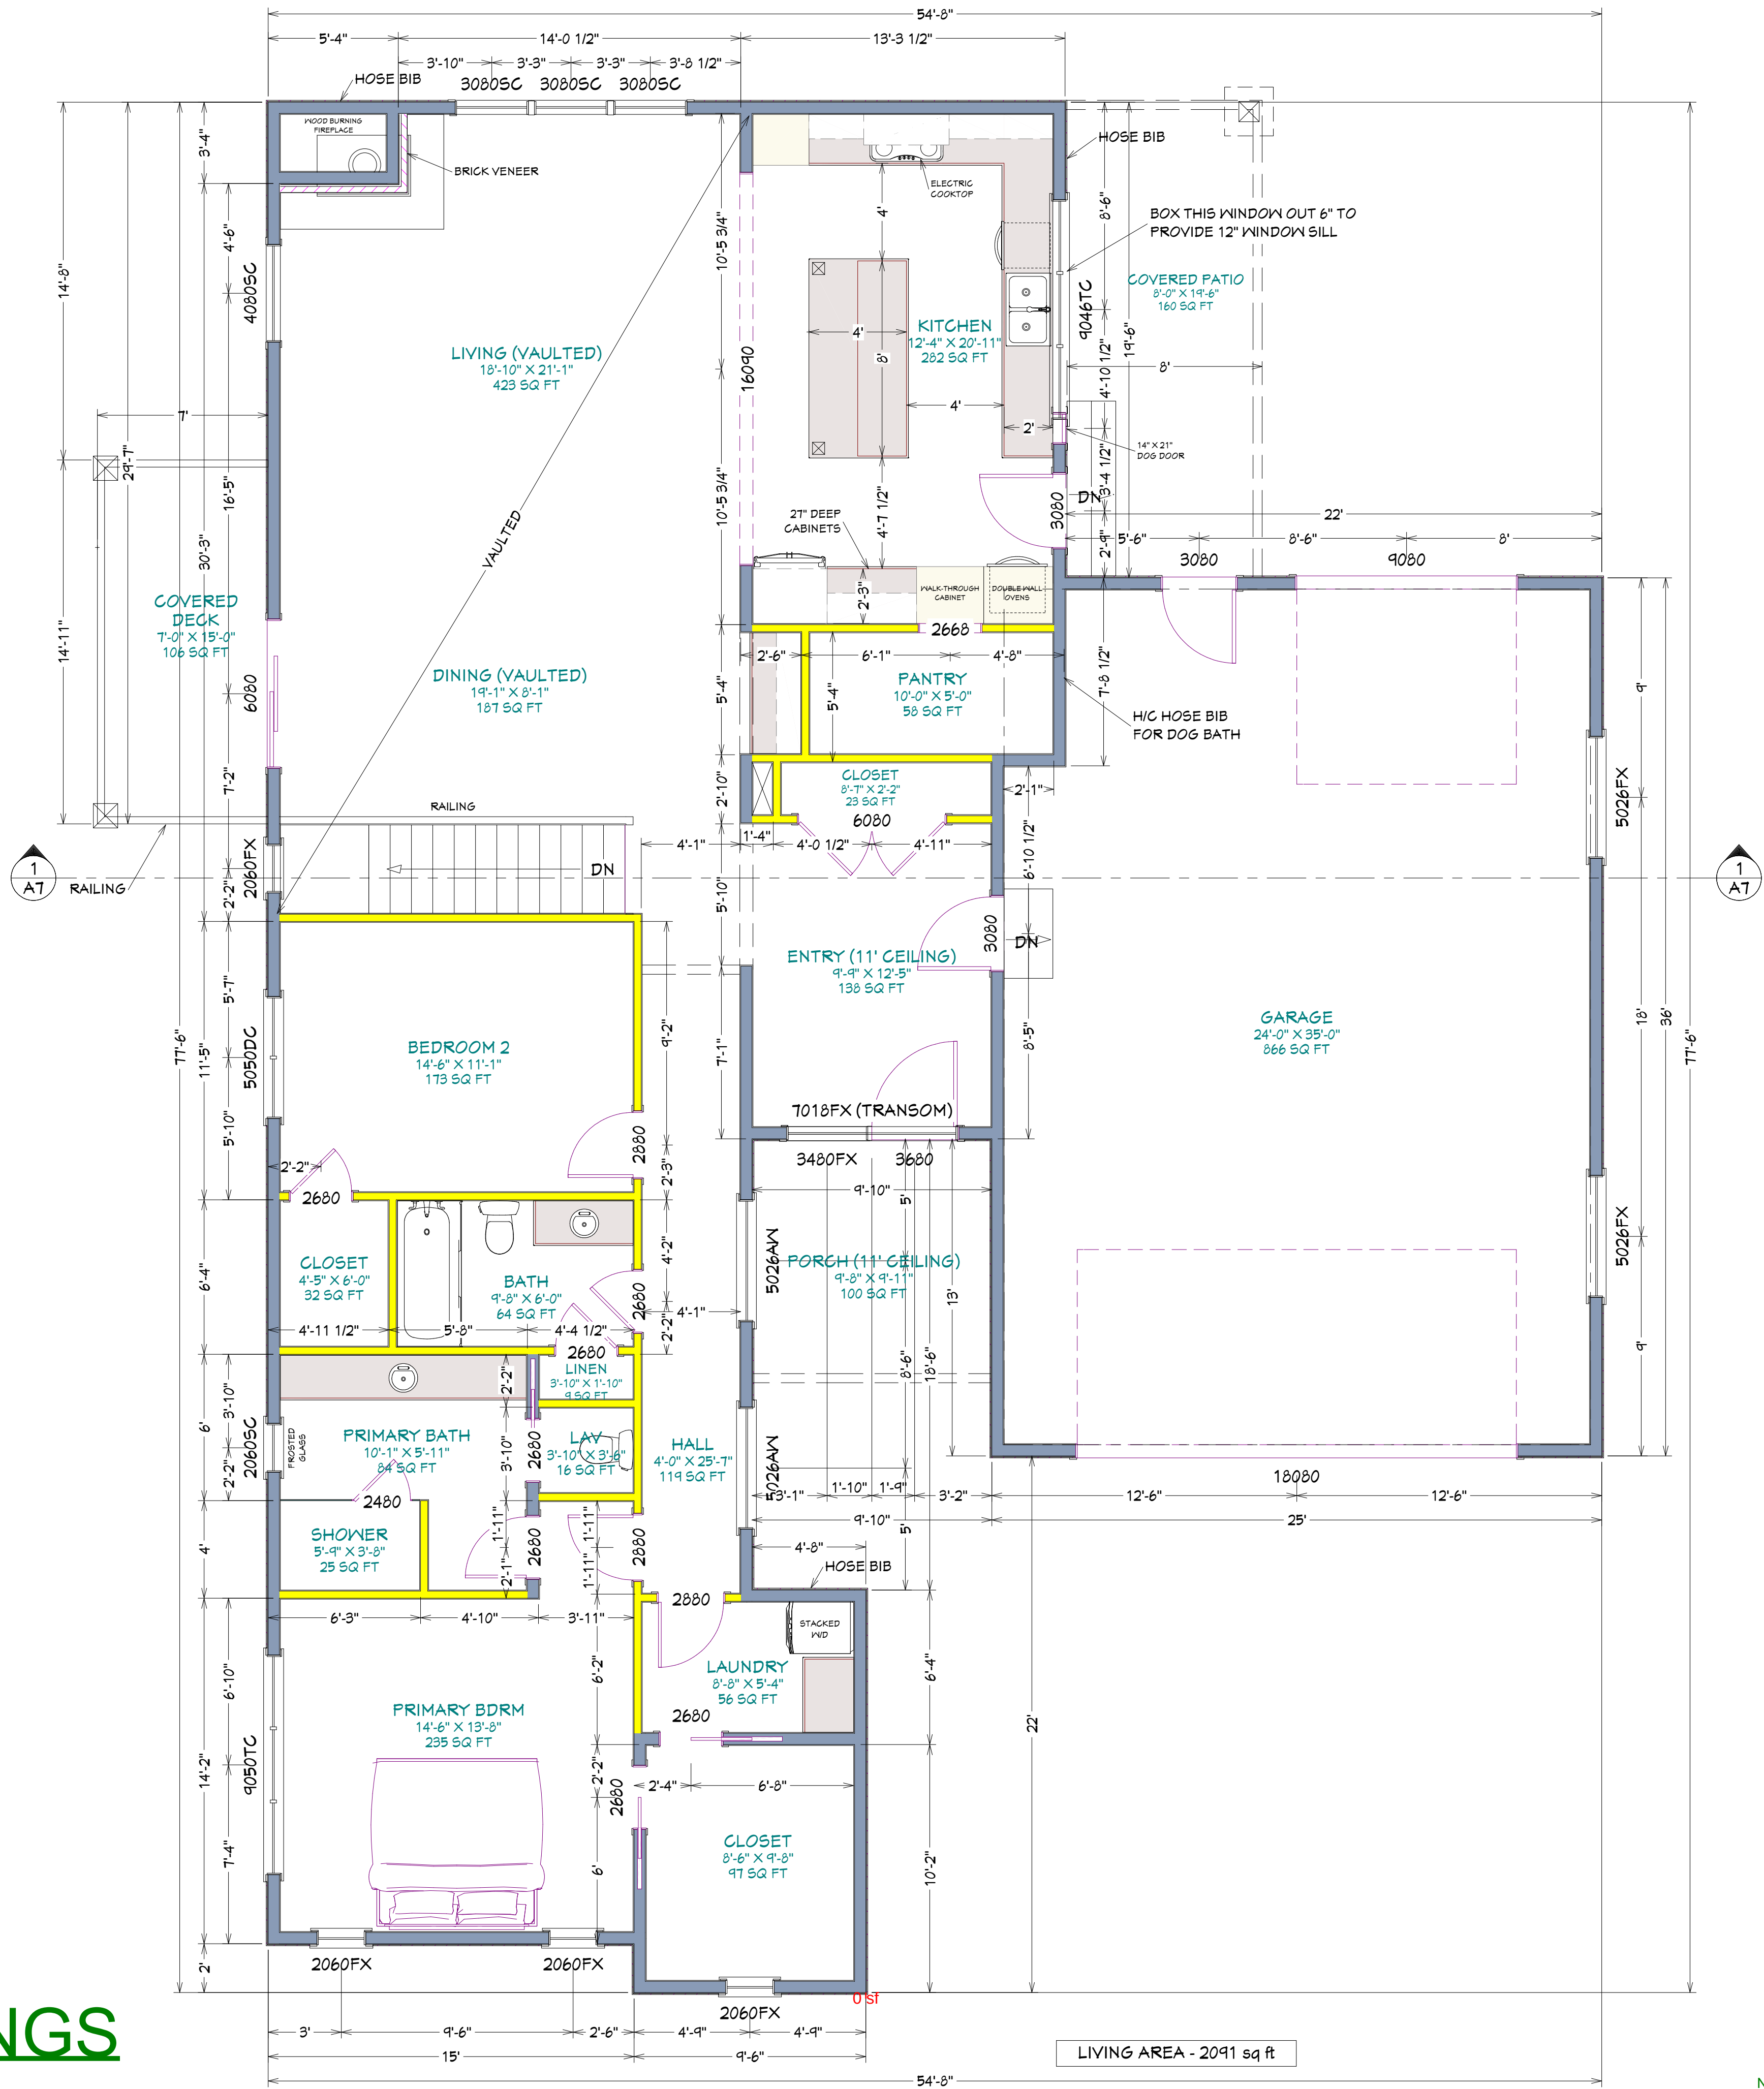

Note: Plans are half of stated scale if printed on 11x17 paper

DANIEL BURT
1165 EAST 3100 NORTH
NORTH LOGAN, UT


CLIENT
DATE
DRWN BY
CHKD BY
DATE
REVISIONS

JOB NO.
SHEET NO.


DAVIDSON
Home Design

Residential Design By Matthew Davidson
435-512-9161 - davidsonhomedesign@gmail.com
Copyright Davidson Home Design

A3

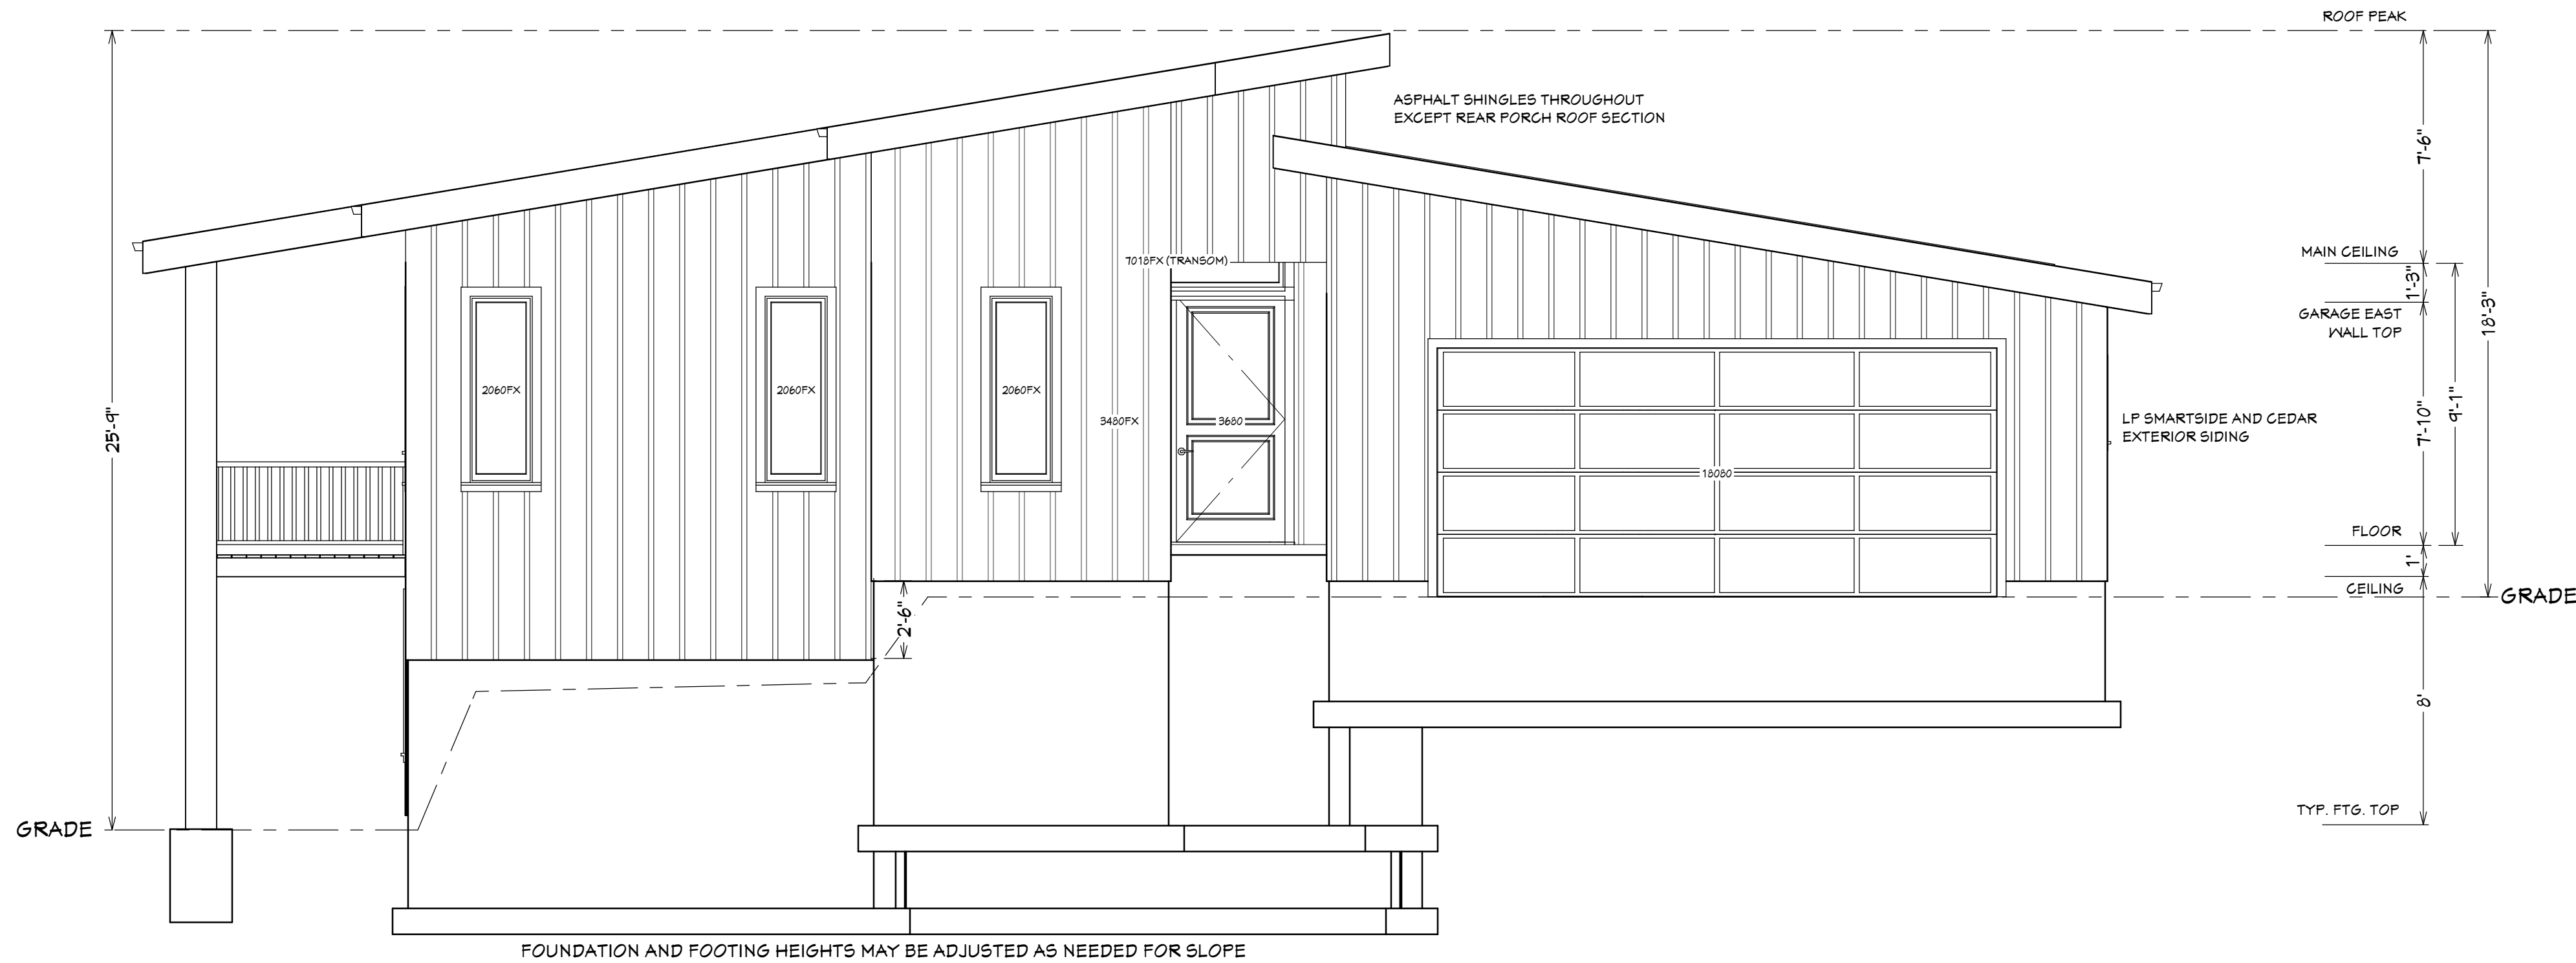

FRONT ELEVATION
SCALE 1/4"=1'

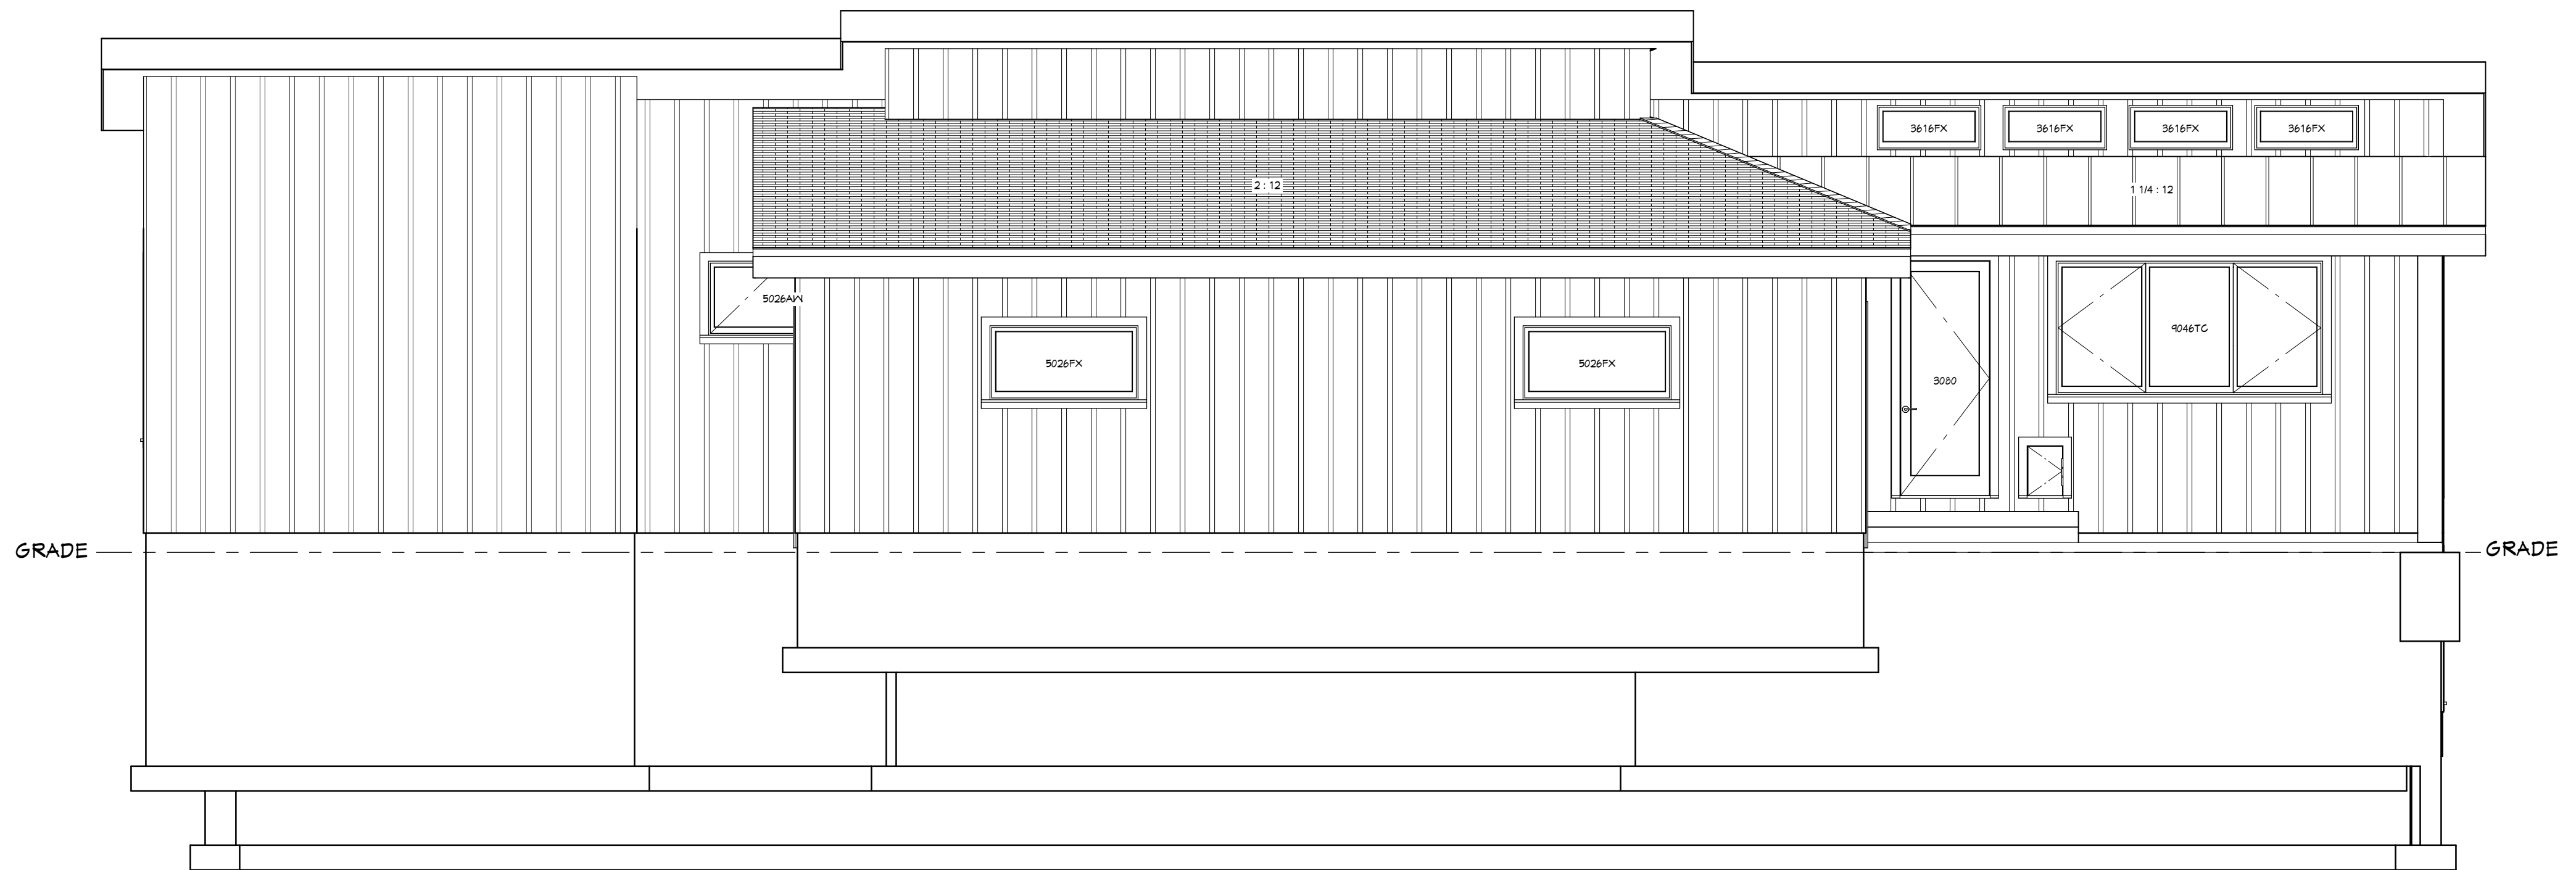

RIGHT ELEVATION
SCALE 1/4"=1'

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

Note: Plans are half of stated scale if printed on 11x17 paper

Residential Design By Matthew Davidson
435-512-9161 - davidsonhomedesign@gmail.com
Copyright Davidson Home Design

DAVIDSON

Home Design

DANIEL BURT

1165 EAST 3100 NORTH

NORTH LOGAN, UT

CLIENT

DATE

DRWN BY

CHKD BY


DATE

REVISIONS

JOB NO.

SHEET NO.

A4

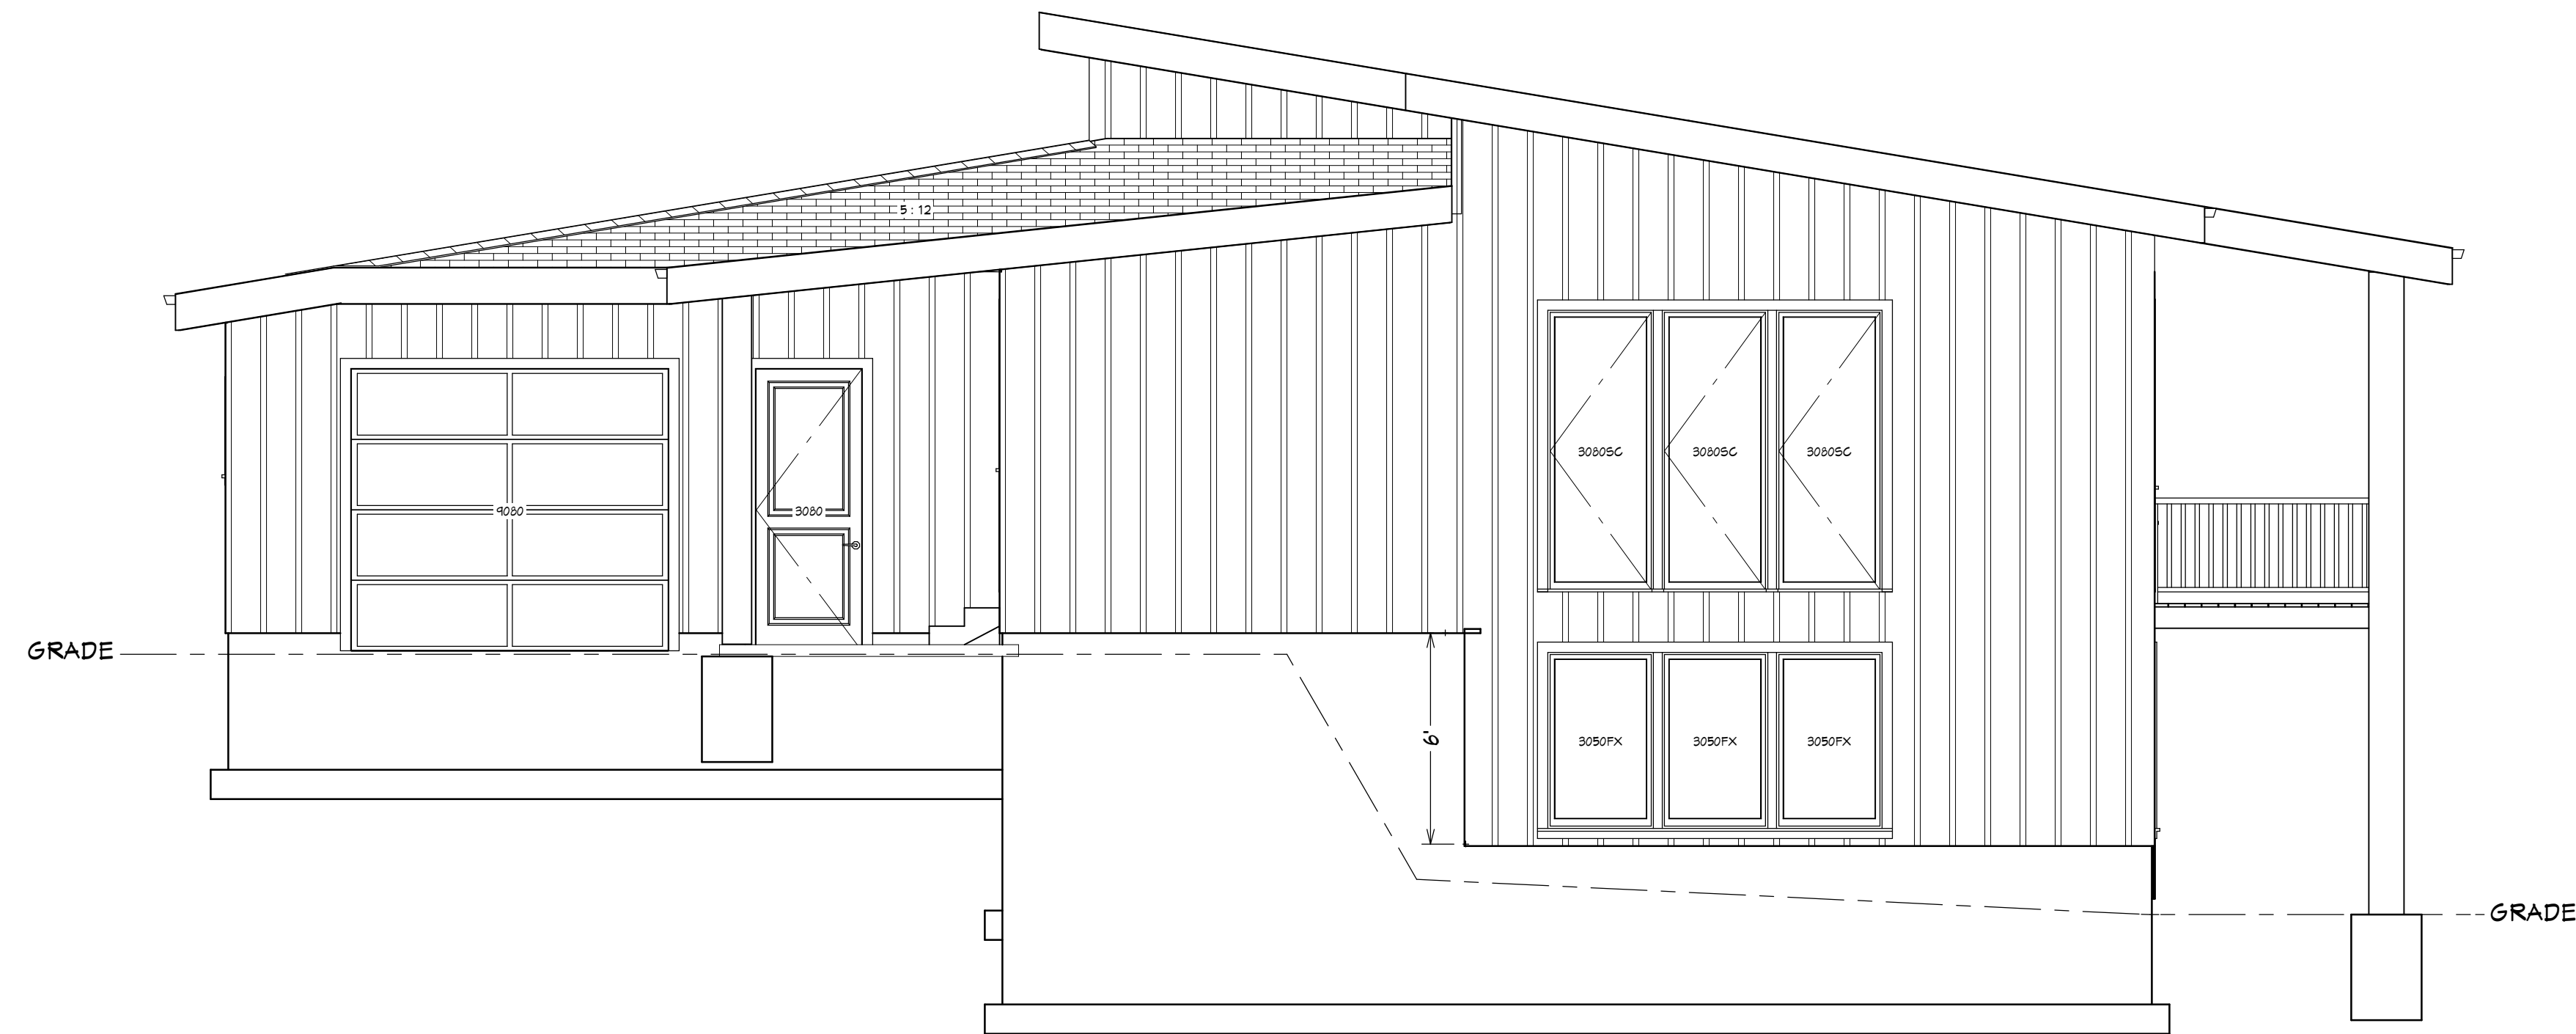

REAR ELEVATION

SCALE 1/4"=1'



LEFT ELEVATION

SCALE 1/4"=1'

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

Note: Plans are half of stated scale if printed on 11x17 paper

Residential Design By Matthew Davidson
435-512-9161 - davidsonhomedesign@gmail.com
Copyright Davidson Home Design

DAVIDSON

Home Design

DANIEL BURT

1165 EAST 3100 NORTH

NORTH LOGAN, UT

CLIENT

DATE

DRWN BY

CHKD BY


DATE

REVISIONS

JOB NO.

SHEET NO.

A5

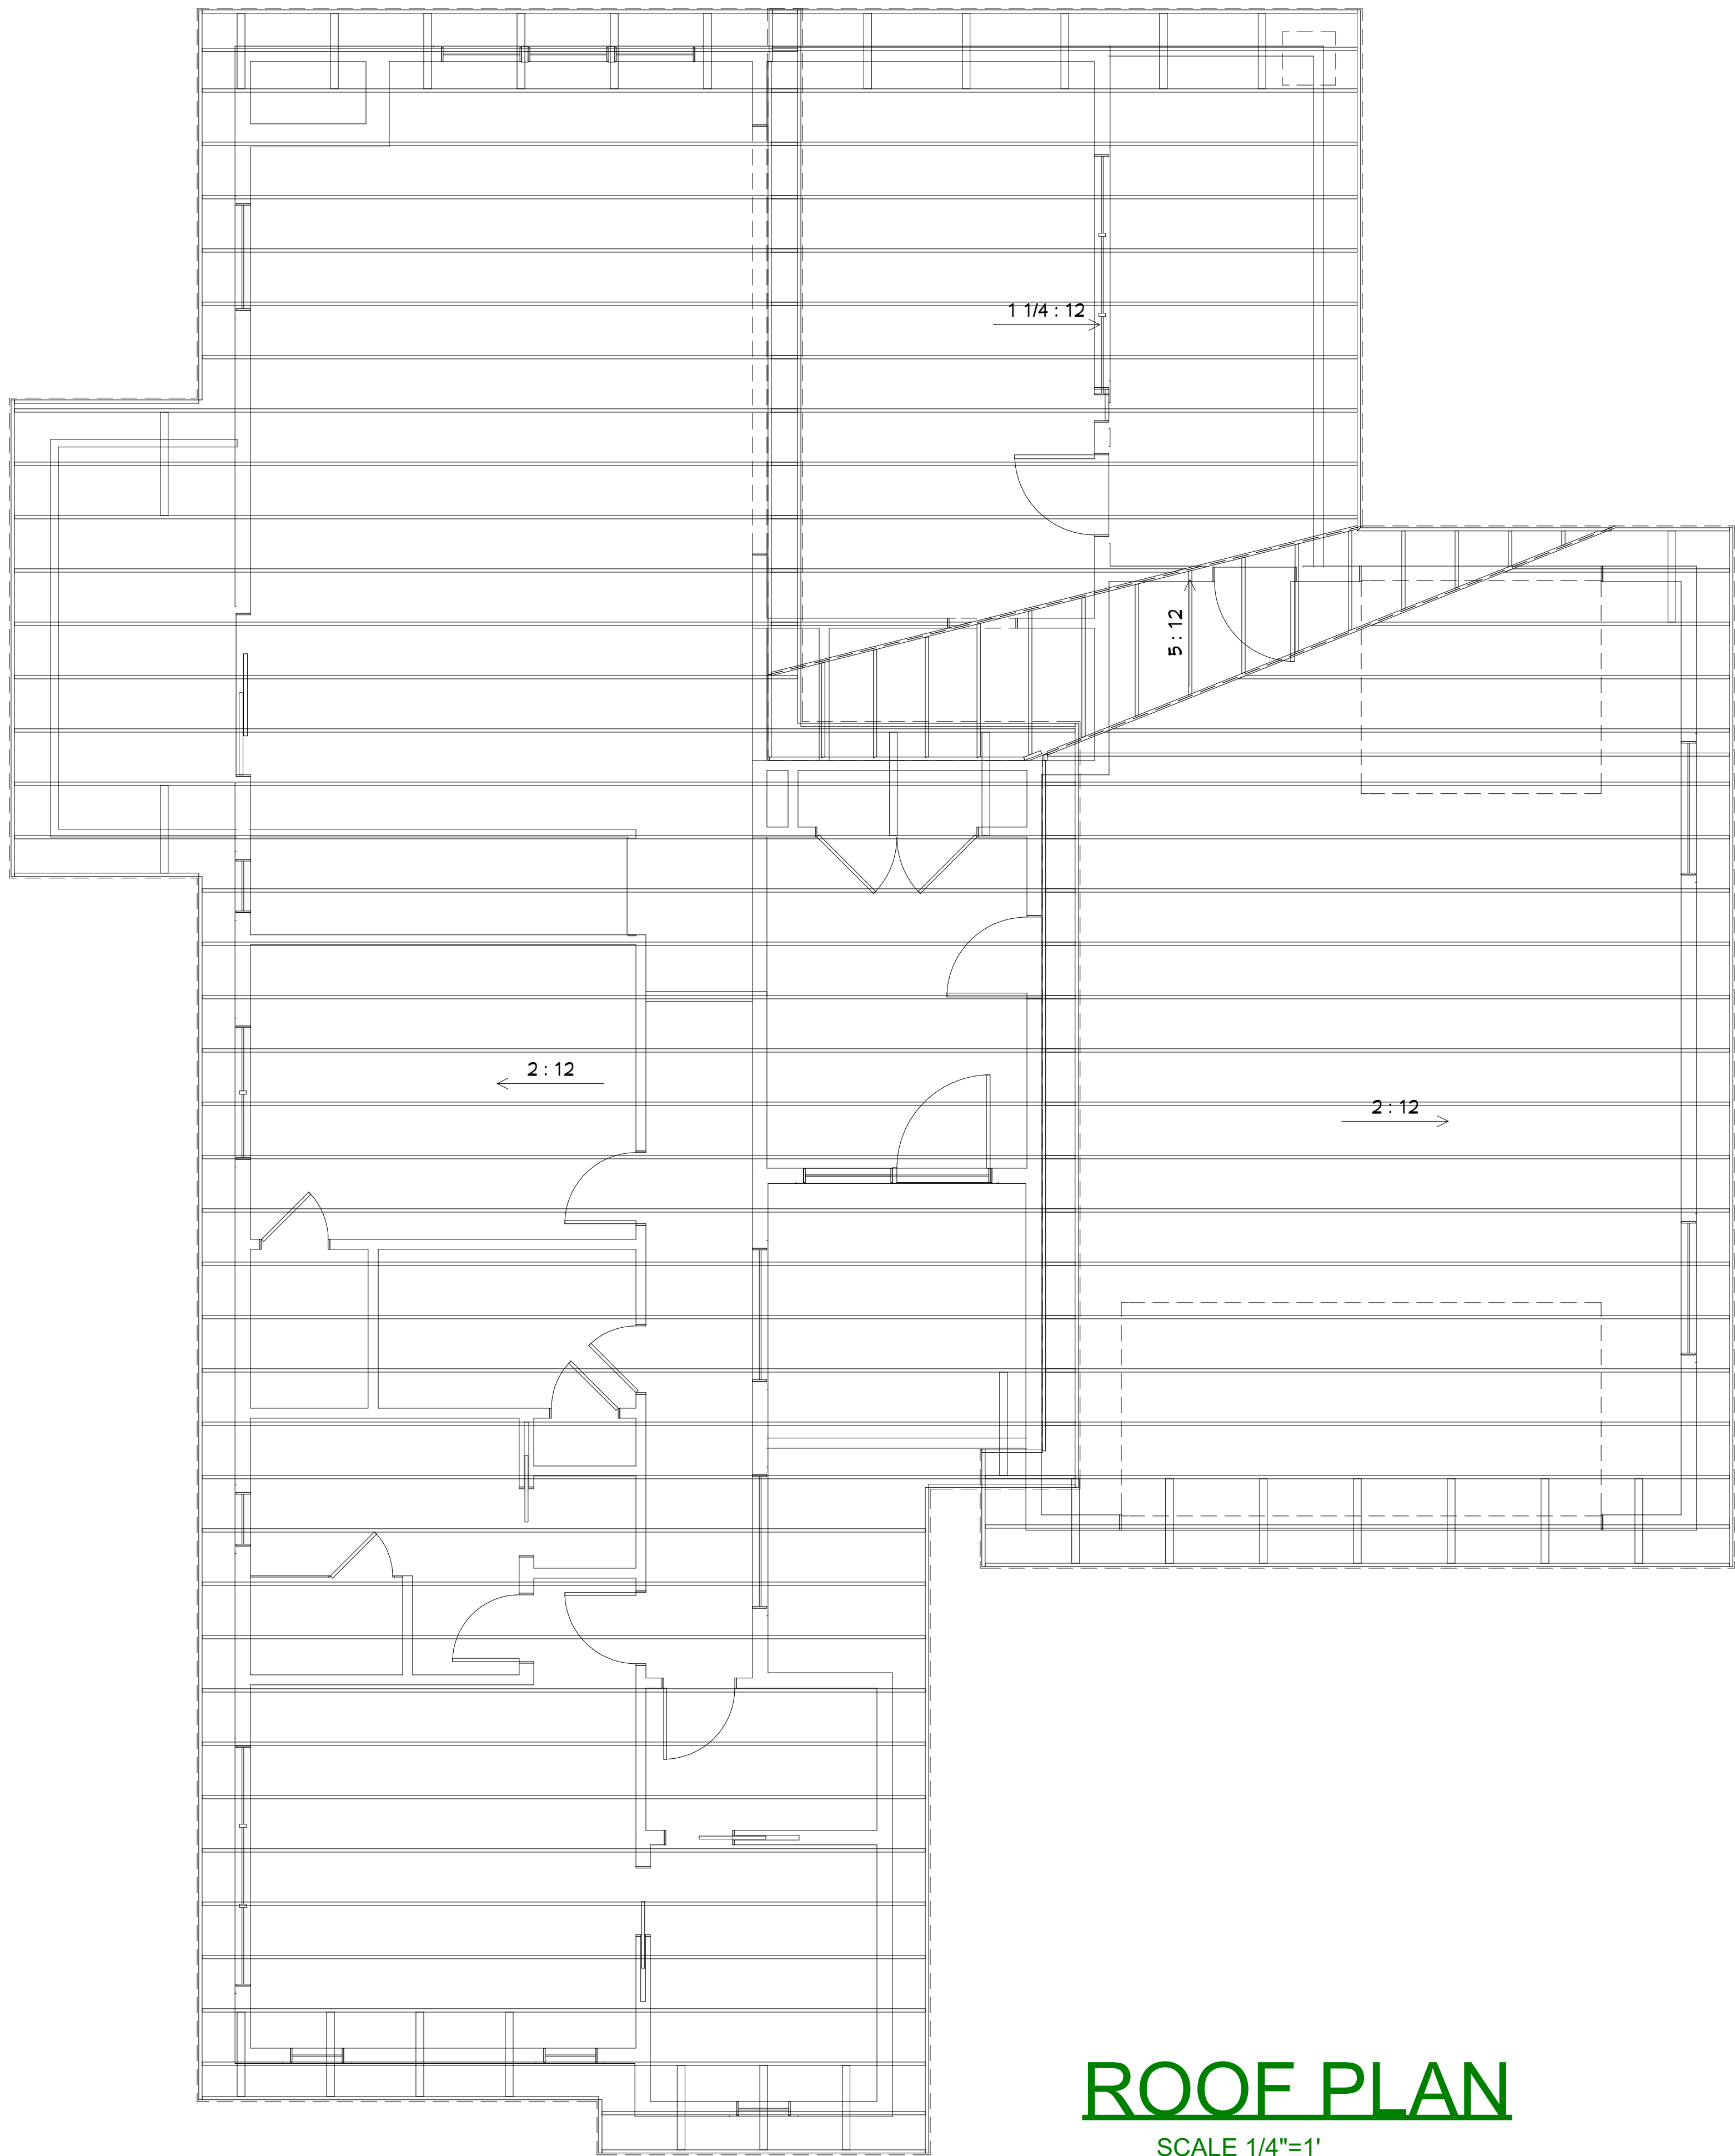

ROOF PLAN
SCALE 1/4"=1'

- Roof Framing:
1. Fascia to be 2"x Douglas Fir.
 2. For soffit size see details.
 3. For spans and dimensions refer to floor plans.
 4. Trusses are to be an approved truss design from the truss manufacture's engineer. Install as per engineers specs
 5. Use Simpson H-1 hurricane anchors at each truss or rafter to wall connection.
 6. Solid blocking required between joists, rafters, and trusses over all bearing walls. Such blocking shall be 1 1/2" minimum thickness and full depth of joists, rafters, or trusses.
 7. Minimum header sizes shall be according to the header size table unless otherwise noted.
 8. Basis of design roof live/snow load of 37 psf, and roof dead load of 15 psf.
 9. Plywood roof decking to be Min 1/2" thick, 24/0, CDX or 5/8 wafer.

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

- PRE-ENGINEERED ENERGY TRUSSES AS SUPPLIED BY TRUSS MANUFACTURER
1. Trusses to be 24" O.C.
 2. Attic access min 22 1/2" x 30" were most convenient. For all areas greater than 30"
 3. Install all trusses as per truss manufacturer installation guidelines.

Note: Plans are half of stated scale if printed on 11x17 paper

Floor Framing:

- 1. All floor joist to be Douglas Fir #2 or T.J.I. @ 16" o.c. unless otherwise noted.
- 2. For spans and dimensions refer to floor plans.
- 3. Use Simpson H 2.5 hurricane anchors at each floor joist to bearing wall connection.
- 4. Solid blocking between joists over all bearing walls, and midspans such blocking shall be 2" minimum thickness and full depth of joists.
- 5. Minimum header sizes shall be according to the header size table unless otherwise noted.
- 6. Basis of design: floor live load of 40 psf, and floor dead load of 15 psf.
- 7. Floor decking to be ¾" thick T & G wafer board.
- 8. Joist hangers to be Simpson U210 or equal unless otherwise noted.
- 9. Double joists and or double blocking at all interior walls.

General framing: (Douglas Fir)

- 1. Provide solid headers at all wall openings. Minimum header sizes shall be according to the following table unless otherwise noted.
2'-0" to 4'-0" Span (2) 2x10's
4' + to 6'-0" Span (1) 3 ½ x 7 ¼ LVL
6' + to 8'-0" Span (1) 3 ½ x 7 ¼ LVL
8' + to 10'-0" Span (1) 3 ½ x 11 7/8 LVL
10' + to 12'-0" Span (1) 5 ½ x 11 7/8 LVL
- 2. Brace all exterior walls and cross-stud partitions at each end of building and at least every 25' of length by one of the following:
 - a. Simpson WB 126 wall bracing with 3-16d nails at each end and 1-8d nails at each stud.
 - b. Plywood sheathing of a minimum thickness of 3/8 inch.
- 3. Fire stopping:
 - a. Fireblock stud spaces over 10' in height, furred spaces, soffits, drop ceilings, cove ceilings, stair stringers at top and bottom of run, bearing walls and ceiling joist lines, etc.
Firestopping shall consist of 2" nominal lumber.
 - b. Firestop openings around vents, pipes, ducts, chimneys, and fireplaces at ceiling and floor levels with approved noncombustible materials.
- 4. CDX plywood is not approved where exposed to weather, i.e., roof overhangs.
- 5. Exterior wall framing to be 2"x6" studs at 16" o.c. Interior wall, framing at non-bearing walls to be 2"x4" studs at 24" o.c. and at bearing walls 2"x4" studs at 16" o.c. with double top plate.
- 6. Shear wall to be 3/8" CDX plywood applied horizontally.
- 7. All stress grade lumber shall comply with WCLA specs and bear approval stamp on all pieces in place.
- 8. Framing lumber shall be Douglas Fir construction grade Fb 1450 or better unless otherwise noted.
- 9. Nailing to be per current U.B.C. unless otherwise noted.
- 10. All bearing partitions shall have double top plates.
- 11. Structural glued laminated timbers to be stamped by an approved agency.
- 12. Use redwood or pressure treated sole plates at all exterior walls.



SECTION 1

FULL HOUSE SECTION

SCALE 1/4"=1'

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

Note: Plans are half of stated scale if printed on 11x17 paper



Note: Plans are half of stated scale if printed on 11x17 paper




STAIR SECTION
SCALE 1/4"=1'

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

- STAIR SPECIFICATIONS**
- 1. Stairs to be constructed with the following materials:
2x6 kick plate anchor to concrete with expansion type anchor bolts,
2x12 treads nosing 1 1/8" minimum, 3-2x12 stringers required,
2x12 blocking, 3/4" wafer board risers and 2x6 ledger.
 - 2. Handrail/Guardrails final style, material and color to be owner's choice. Design to be per code.
 - 3. Guardrails to be 42" high minimum from floor.
 - 4. Handrails to be 34"-38" above tread nosing.
 - 5. Open railing to have intermediate rails or ornamental pattern such that a sphere 4" round cannot pass through.
 - 6. Minimum stair requirements: maximum 8" rise, minimum 42" width, minimum 9" run, minimum head clearance 6'-8".
 - 7. Preferred stair requirements: rise 7" to 7 1/2", run 11" to 12", minimum head clearance 7'-0".
 - 8. Garage entrance stairs may be concrete or wood as per contractor/homeowner




Kitchen layout and cabinets to be chosen by homeowner/contractor, basic layout for reference only. Measure after sheetrock is installed for correct sizing.

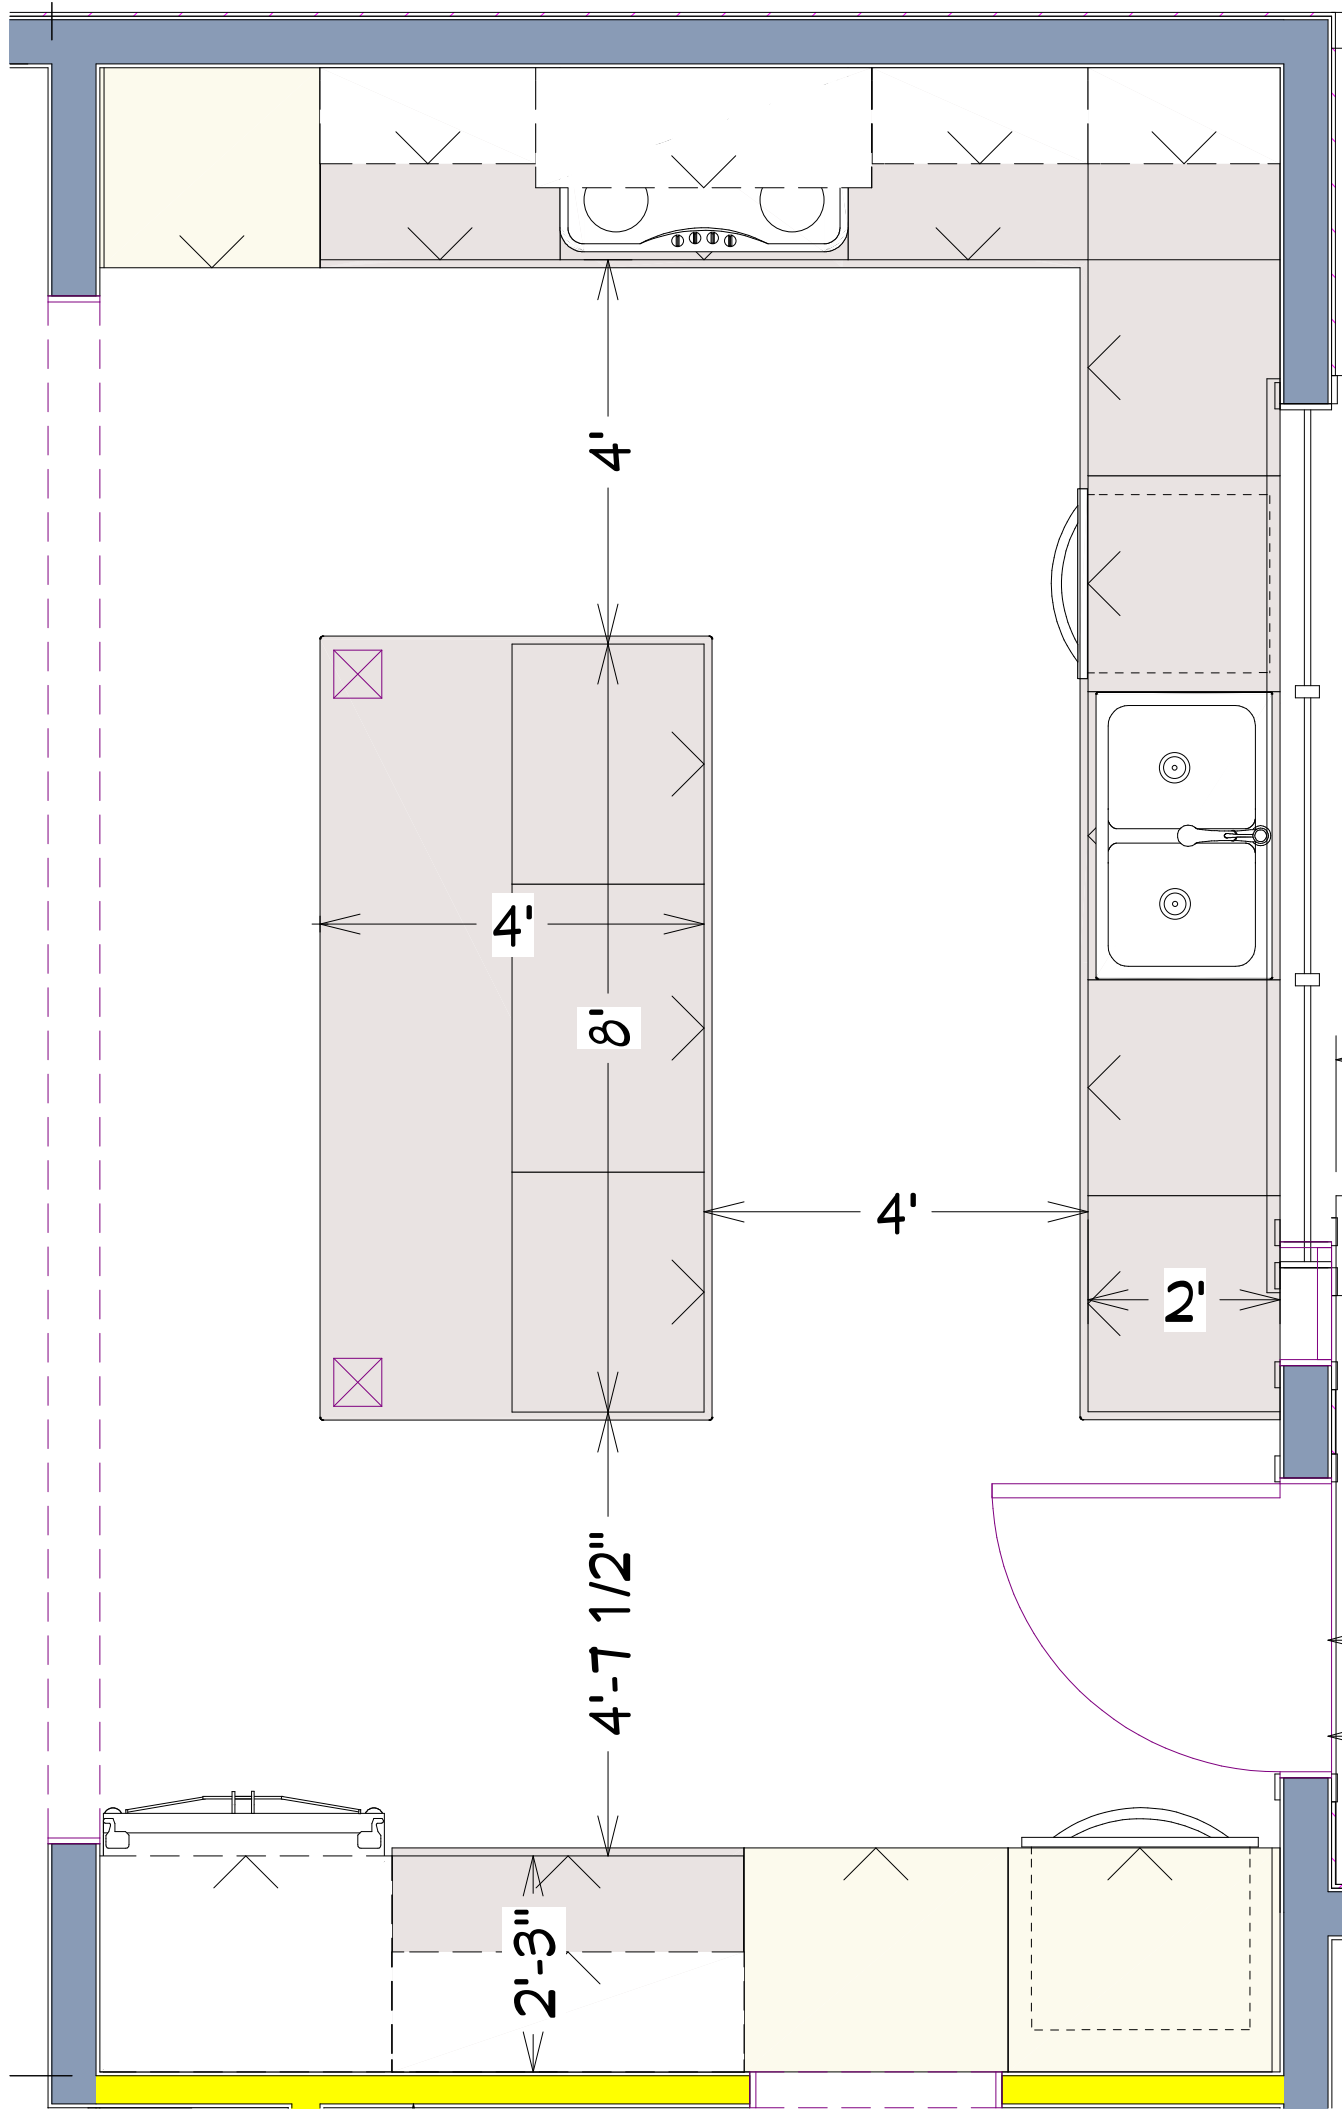

KITCHEN CABINETS
SCALE 1/2"=1'


Note: Plans are half of stated scale if printed on 11x17 paper

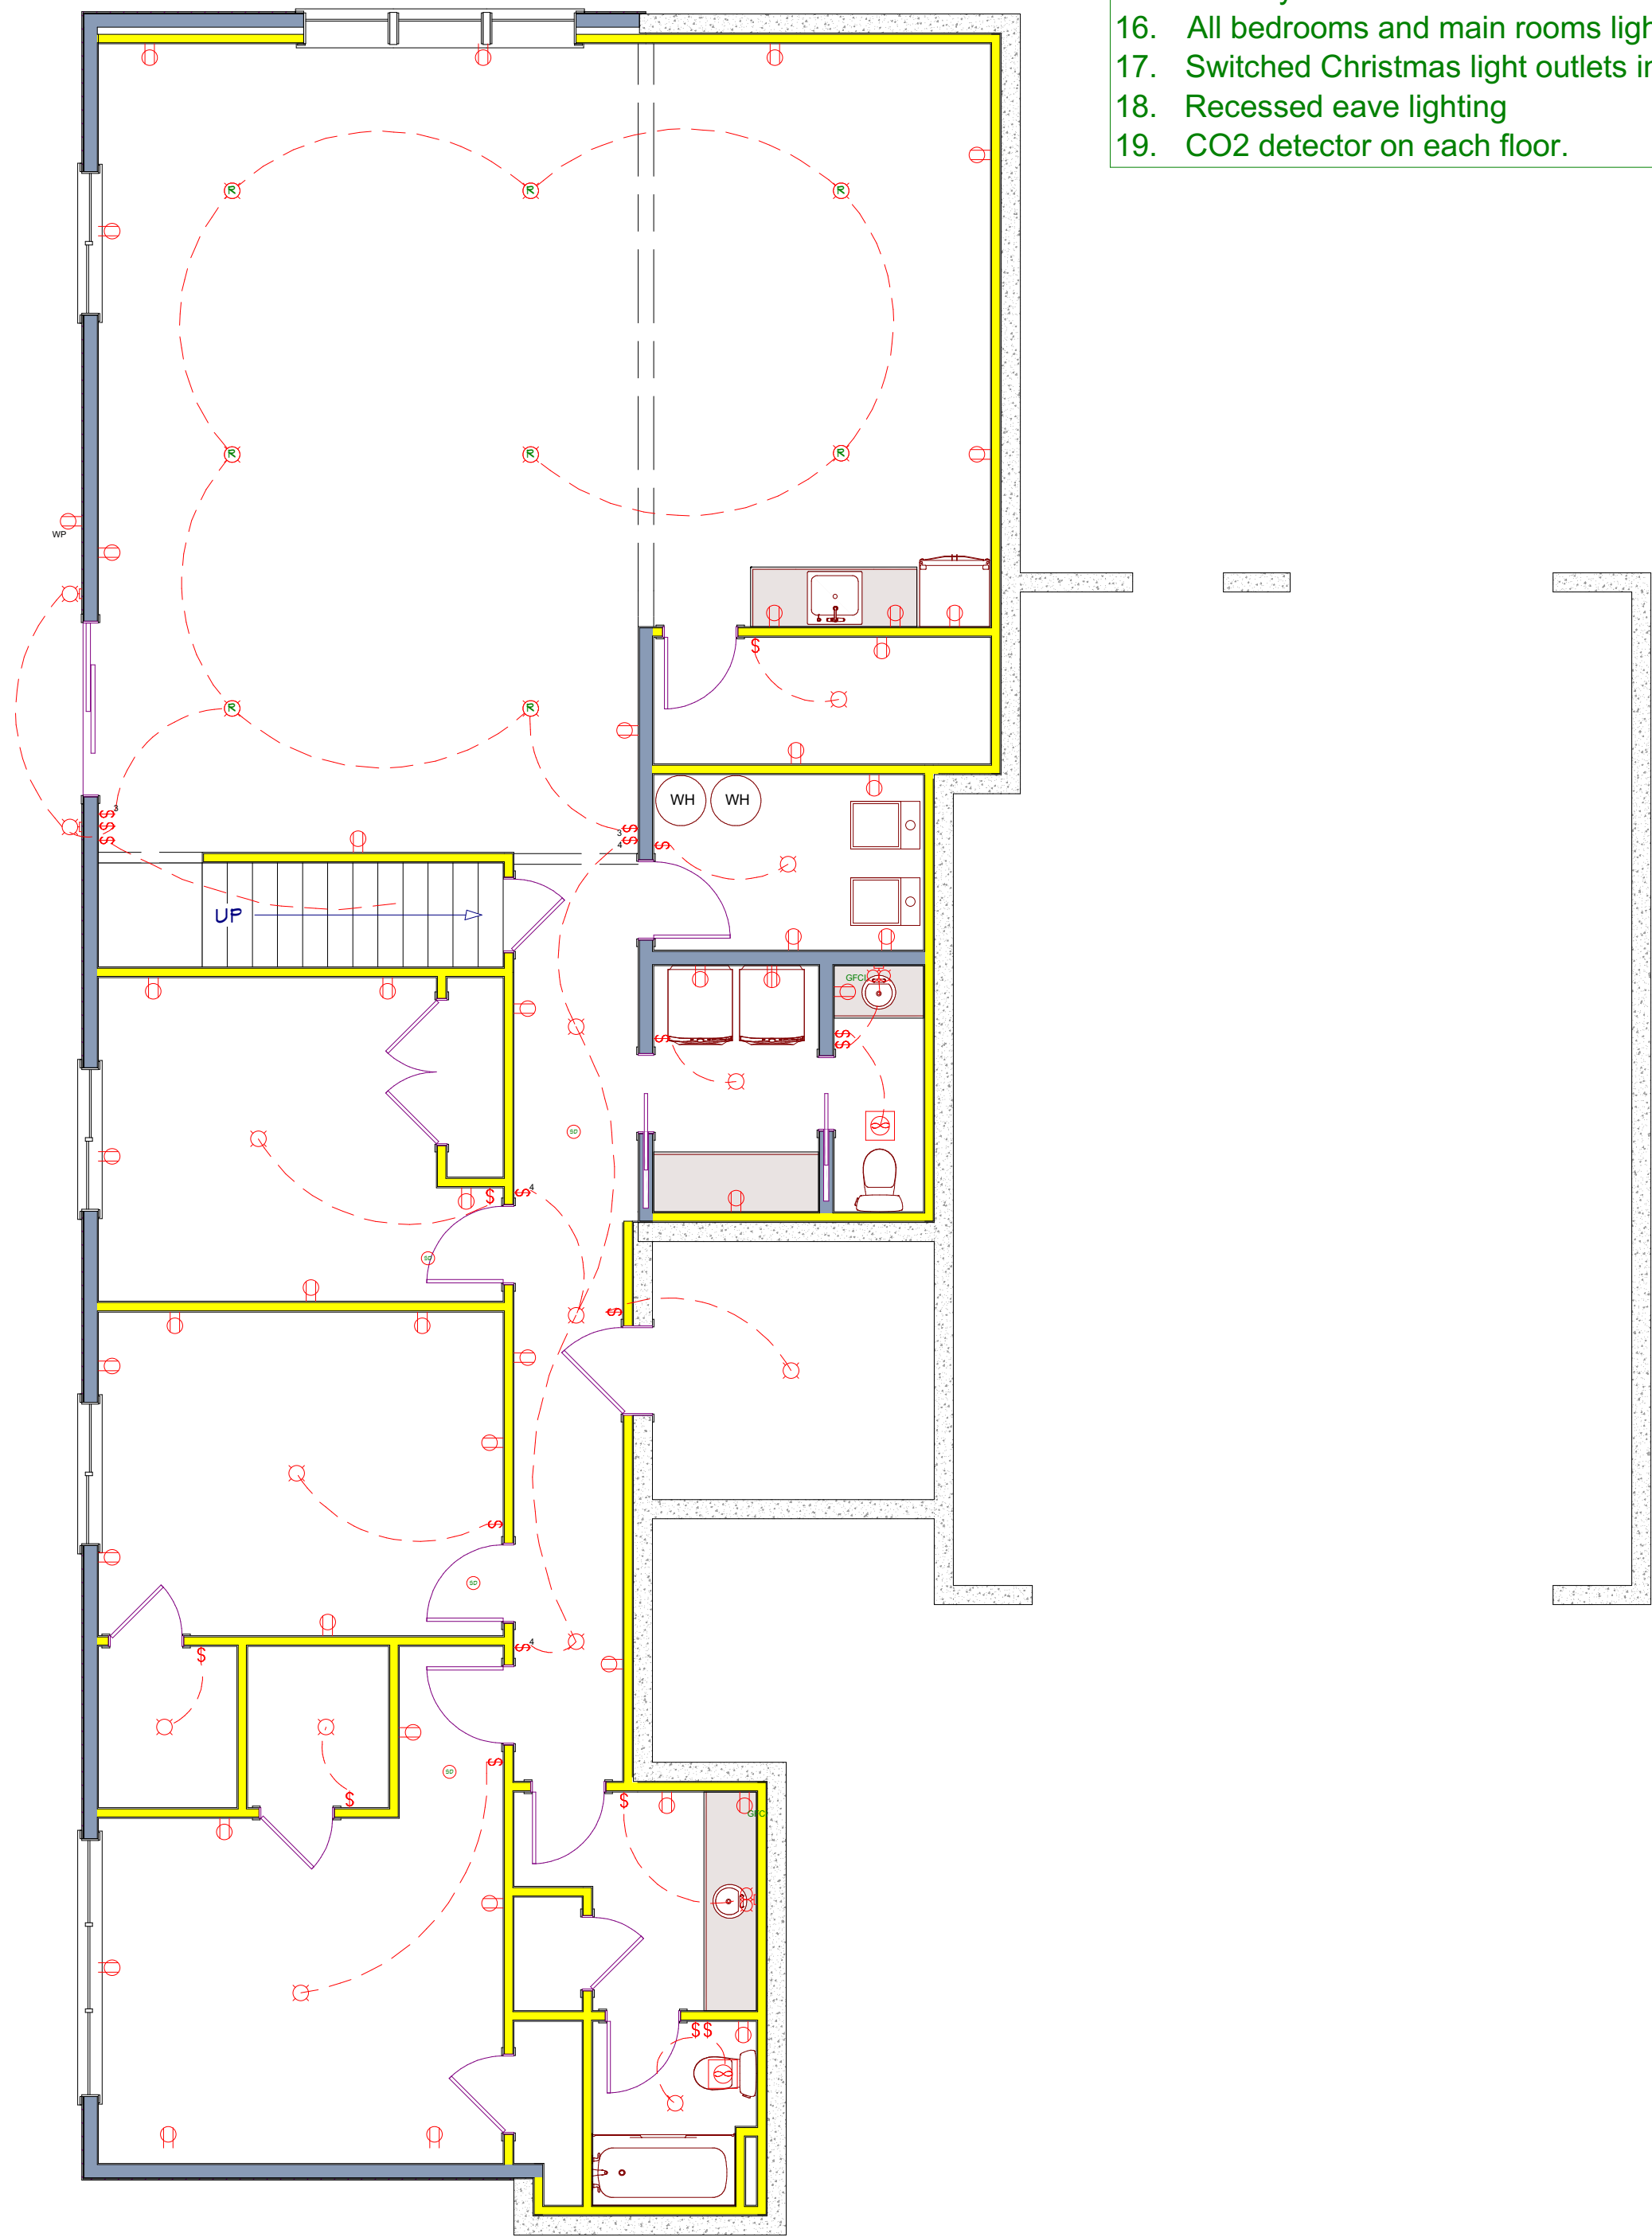

BASEMENT ELECTRICAL
SCALE 3/16"=1'

- Electrical Systems:
1. Inspection is required prior to backfill of lines.
 2. Provide 20 ft. of No. 4 copper wire as ground electrode in foundation footing.
 3. Bond interior piping system with #8 bare copper.
 4. Provide main jumping bond with #4 bare copper.
 5. Electrical service is to be 200 amp service, 120/240 volt, 1 phase raintight, underground.
 6. Provide separate 20 amp circuits to washer.
 7. Provide 20 amp circuits to family and dining room, and a minimum of two 20 amp circuits to kitchen.
 8. Prewire for TV, telephone in kitchen, family room, living room, and in every bedroom.
 9. Install ground fault current interrupter on exterior, garage, kitchen, and bathroom convenience outlets.
 10. Bottom half of outlet controlled by switch when shown.
 11. All outlets in kitchen are to be at +44" excluding those for the refrigerator, range, disposal, and dishwasher.
 12. Maximum spacing of outlets shall not exceed 12 ft. along wall line and at any wall over 24" wide in all rooms except kitchen, bath, utility, and garage.
 13. Install light in walk-in closet 18" minimum horizontal from any shelf.
 14. Provide a ventilation fan capable of producing a change of air every 12 minutes for bath or utility.
 15. Provide smoke detector alarm conforming to Section 1210(A) U.B.C. and local building codes in every bedroom and on each floor.
 16. All bedrooms and main rooms lighting fixtures boxes to be reinforced for possible ceiling fans
 17. Switched Christmas light outlets in eaves
 18. Recessed eave lighting
 19. CO2 detector on each floor.

ELECTRICAL LEGEND	
SYMBOL	DESCRIPTION
	METER SOCKET
	PANEL BOX
	CEILING FAN W/ LIGHT
	FLUORESCENT LIGHT FIXTURE
	110V CEILING LIGHT FIXTURE
	110V RECESSED LIGHT FIXTURE
	110V EAVE LIGHT FIXTURE
	110V CHANDLIER LIGHT FIXTURE
	110V WALL LIGHT FIXTURE
	SINGLE POLE SWITCH
	THREE WAY SWITCH
	FOUR WAY SWITCH
	DIMMER SWITCH
	OUTDOOR SWITCH
	110V DUPLEX RECEPTACLE
	110V DUPLEX RECEPTACLE GROUND FAULT INTERRUPTED
	110V DUPLEX RECEPTACLE W/ WEATHERPROOF COVER
	110V FLOOR MOUNTED DUPLEX RECEPTACLE
	240V RECEPTACLE
	TELEPHONE JACKS
	TELEVISION JACKS
	DOOR BELL PUSH BUTTON
	THERMOSTAT
	SMOKE DETECTOR
	EXHAUST FAN
	DOOR CHIME
	FIRE ALARM PANEL
	COMPUTER POINT

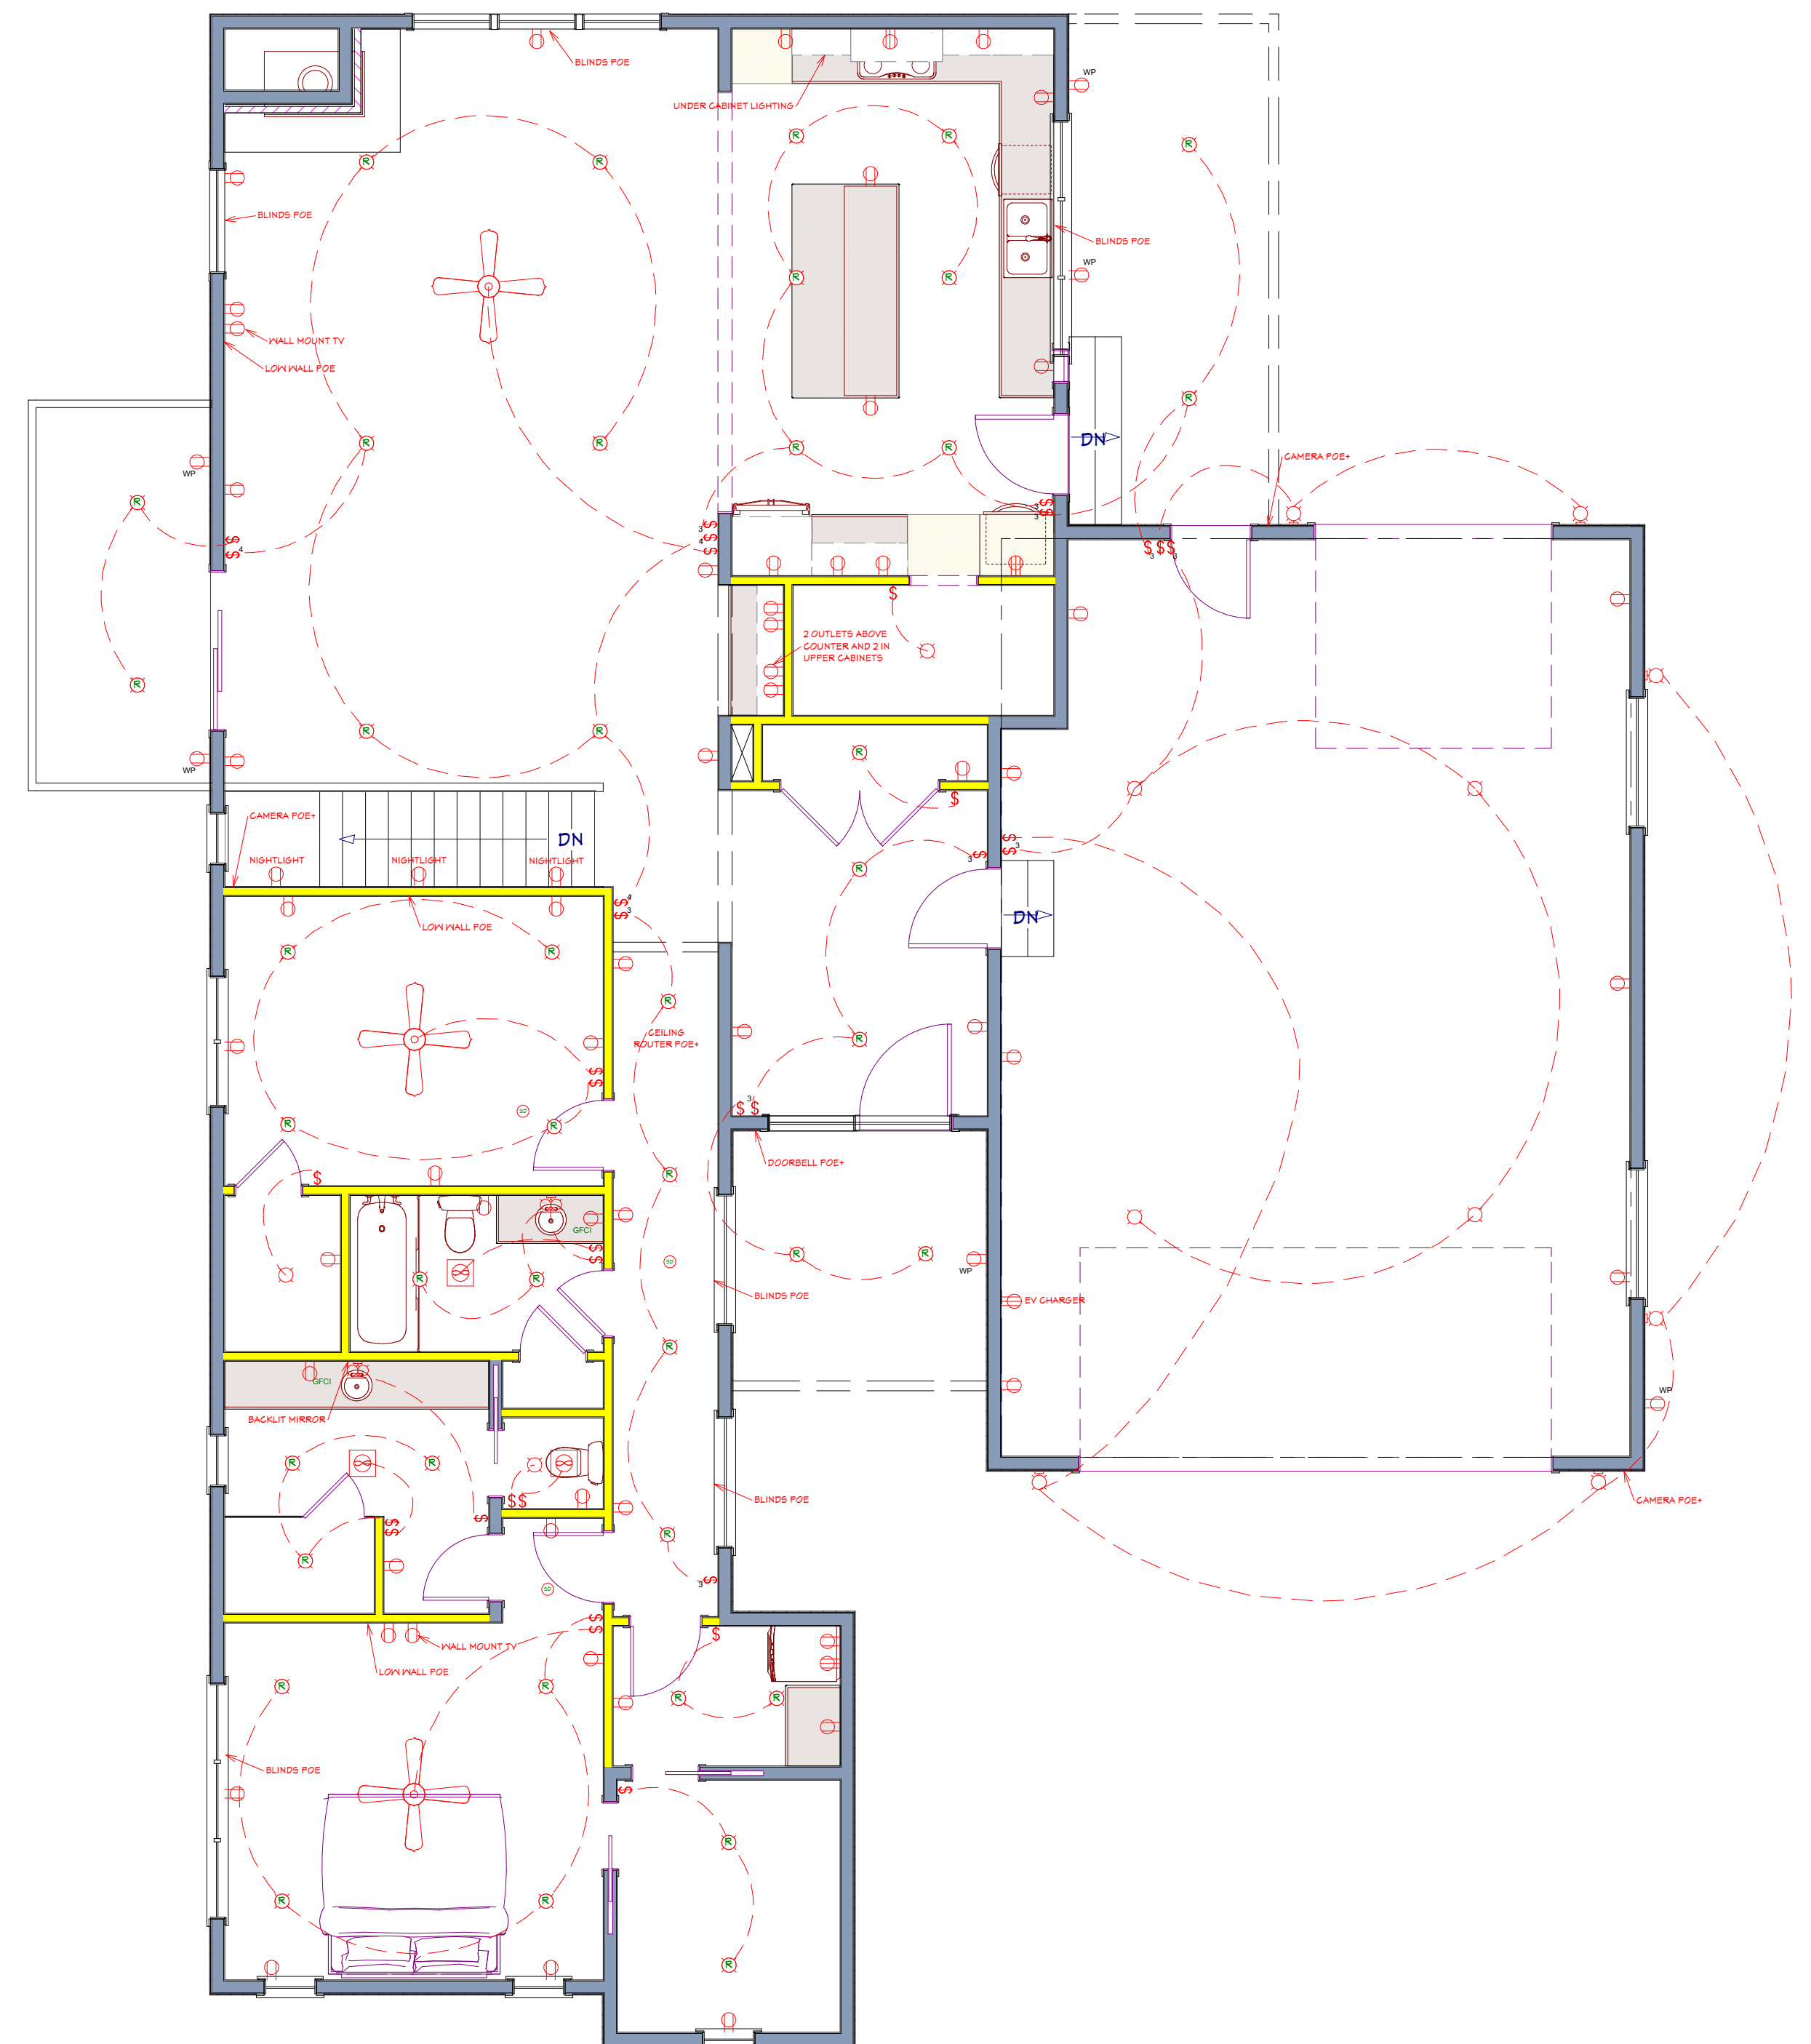

MAIN FLOOR ELECTRICAL
SCALE 3/16"=1'

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

Note: Plans are half of stated scale if printed on 11x17 paper



Residential Design By Matthew Davidson
435-512-9161 - davidsonhomedesign@gmail.com
Copyright Davidson Home Design

DAVIDSON
Home Design

DANIEL BURT
1165 EAST 3100 NORTH
NORTH LOGAN, UT

CLIENT _____
DATE _____
DRWN BY _____
CHKD BY _____
DATE _____
REVISIONS _____

JOB NO. _____
SHEET NO. **A10**

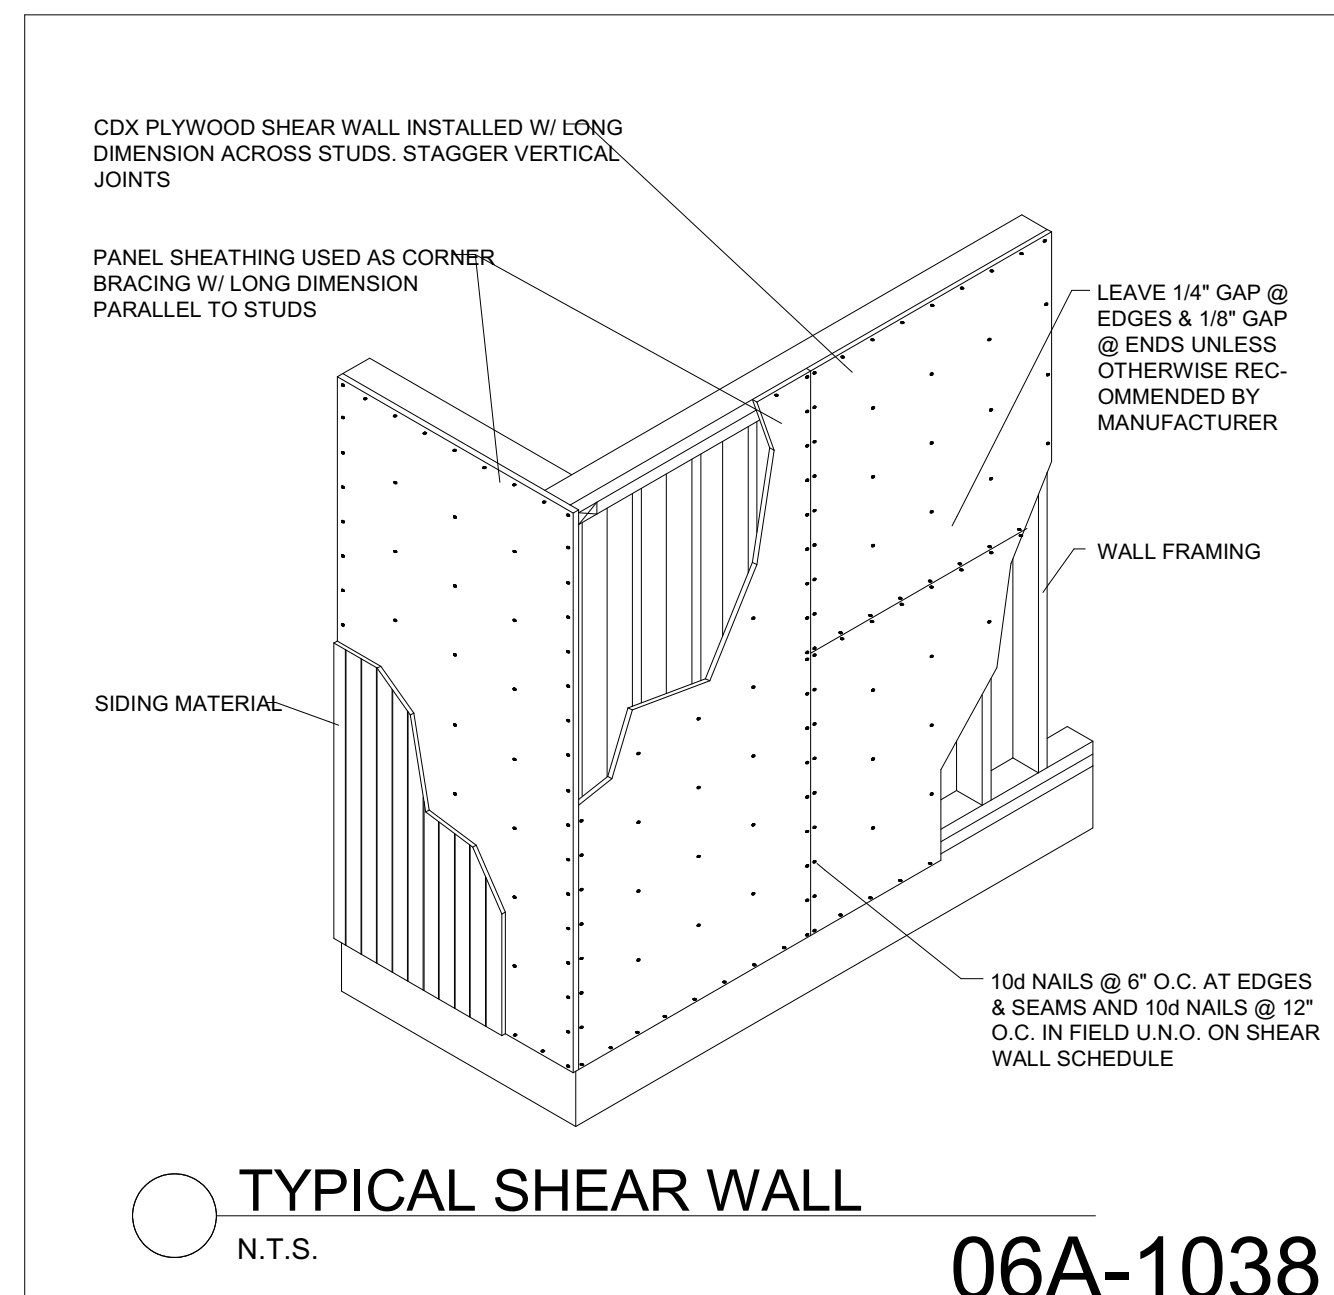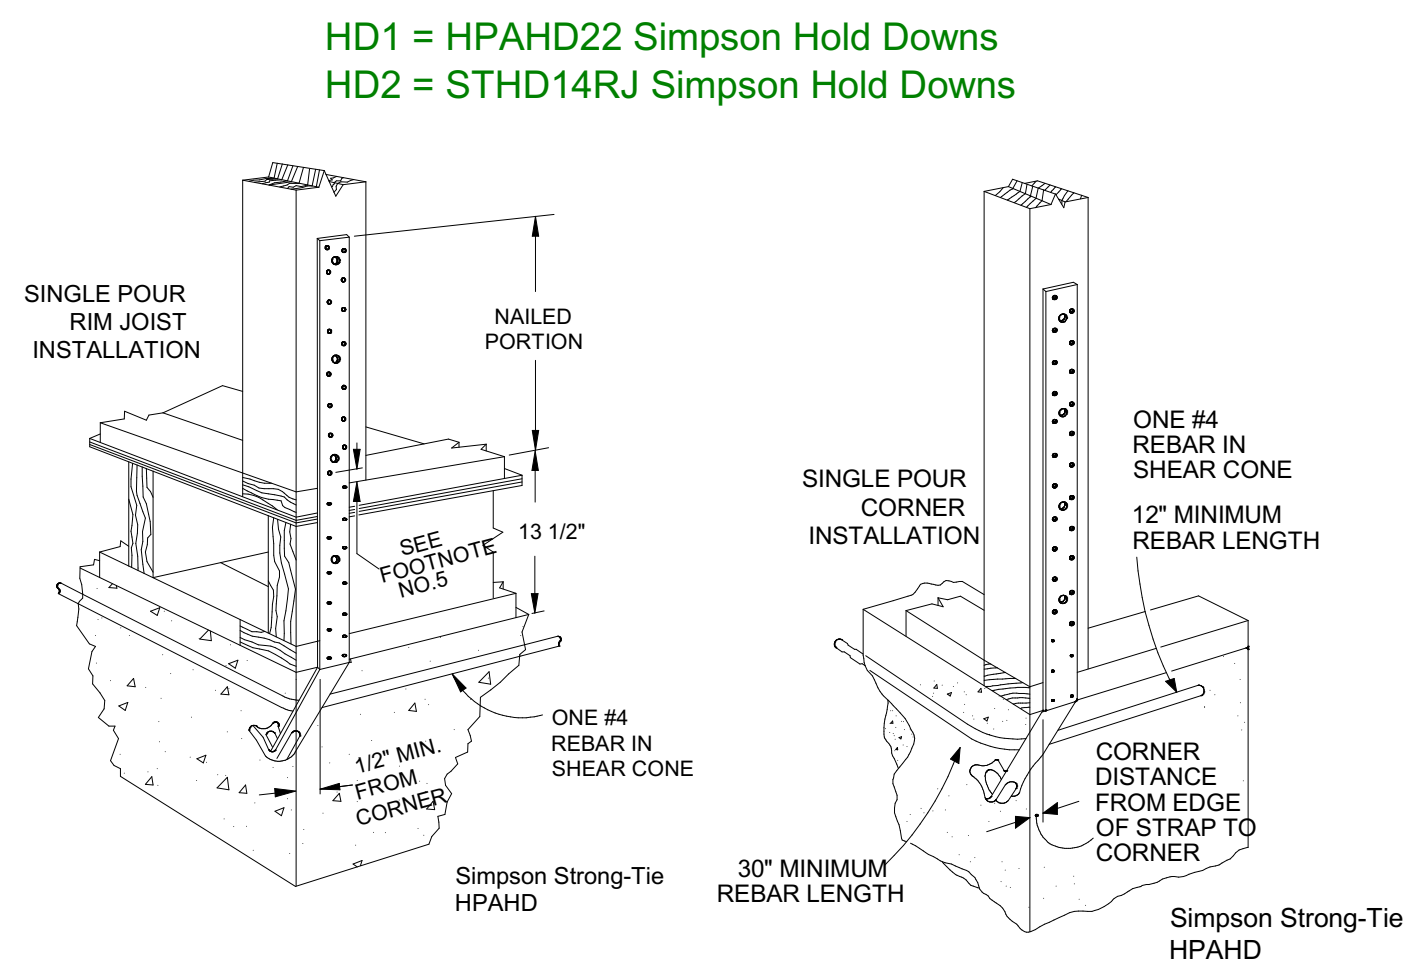

ASPHALT SHINGLES ROOFING MATERIAL
30# ROOFING PAPER
5/8" Min ROOF DECKING
ENGINEERED TRUSSES
VENT PER CODE VENTILATION


METAL DRIP EDGE
RAIN GUTTERS
2 x 8 SUB FASCIA
12" METAL FASCIA
15" FT. OVERHANG
METAL VENTED SOFFIT

EXT. WALL FINISH AS PER ELEVATIONS
TYVEK HOUSE WRAP
7/16 MIN WALL SHEATHING
2 x 6 FRAMING 16 O.C.


A-307 ANCHOR BOLTS
2 x 6 TREATED SILL PLATE
FOAM SILL SEAL
6" MIN TO GRADE HEIGHT

WATERPROOFING TO GRADE
8" FOUNDATION WALL
A-615 RE-BAR 24" OC VERT & HOR


4" DRAIN TILE
10" x 20" MIN CONCRETE FOOTING
A-615 RE-BAR

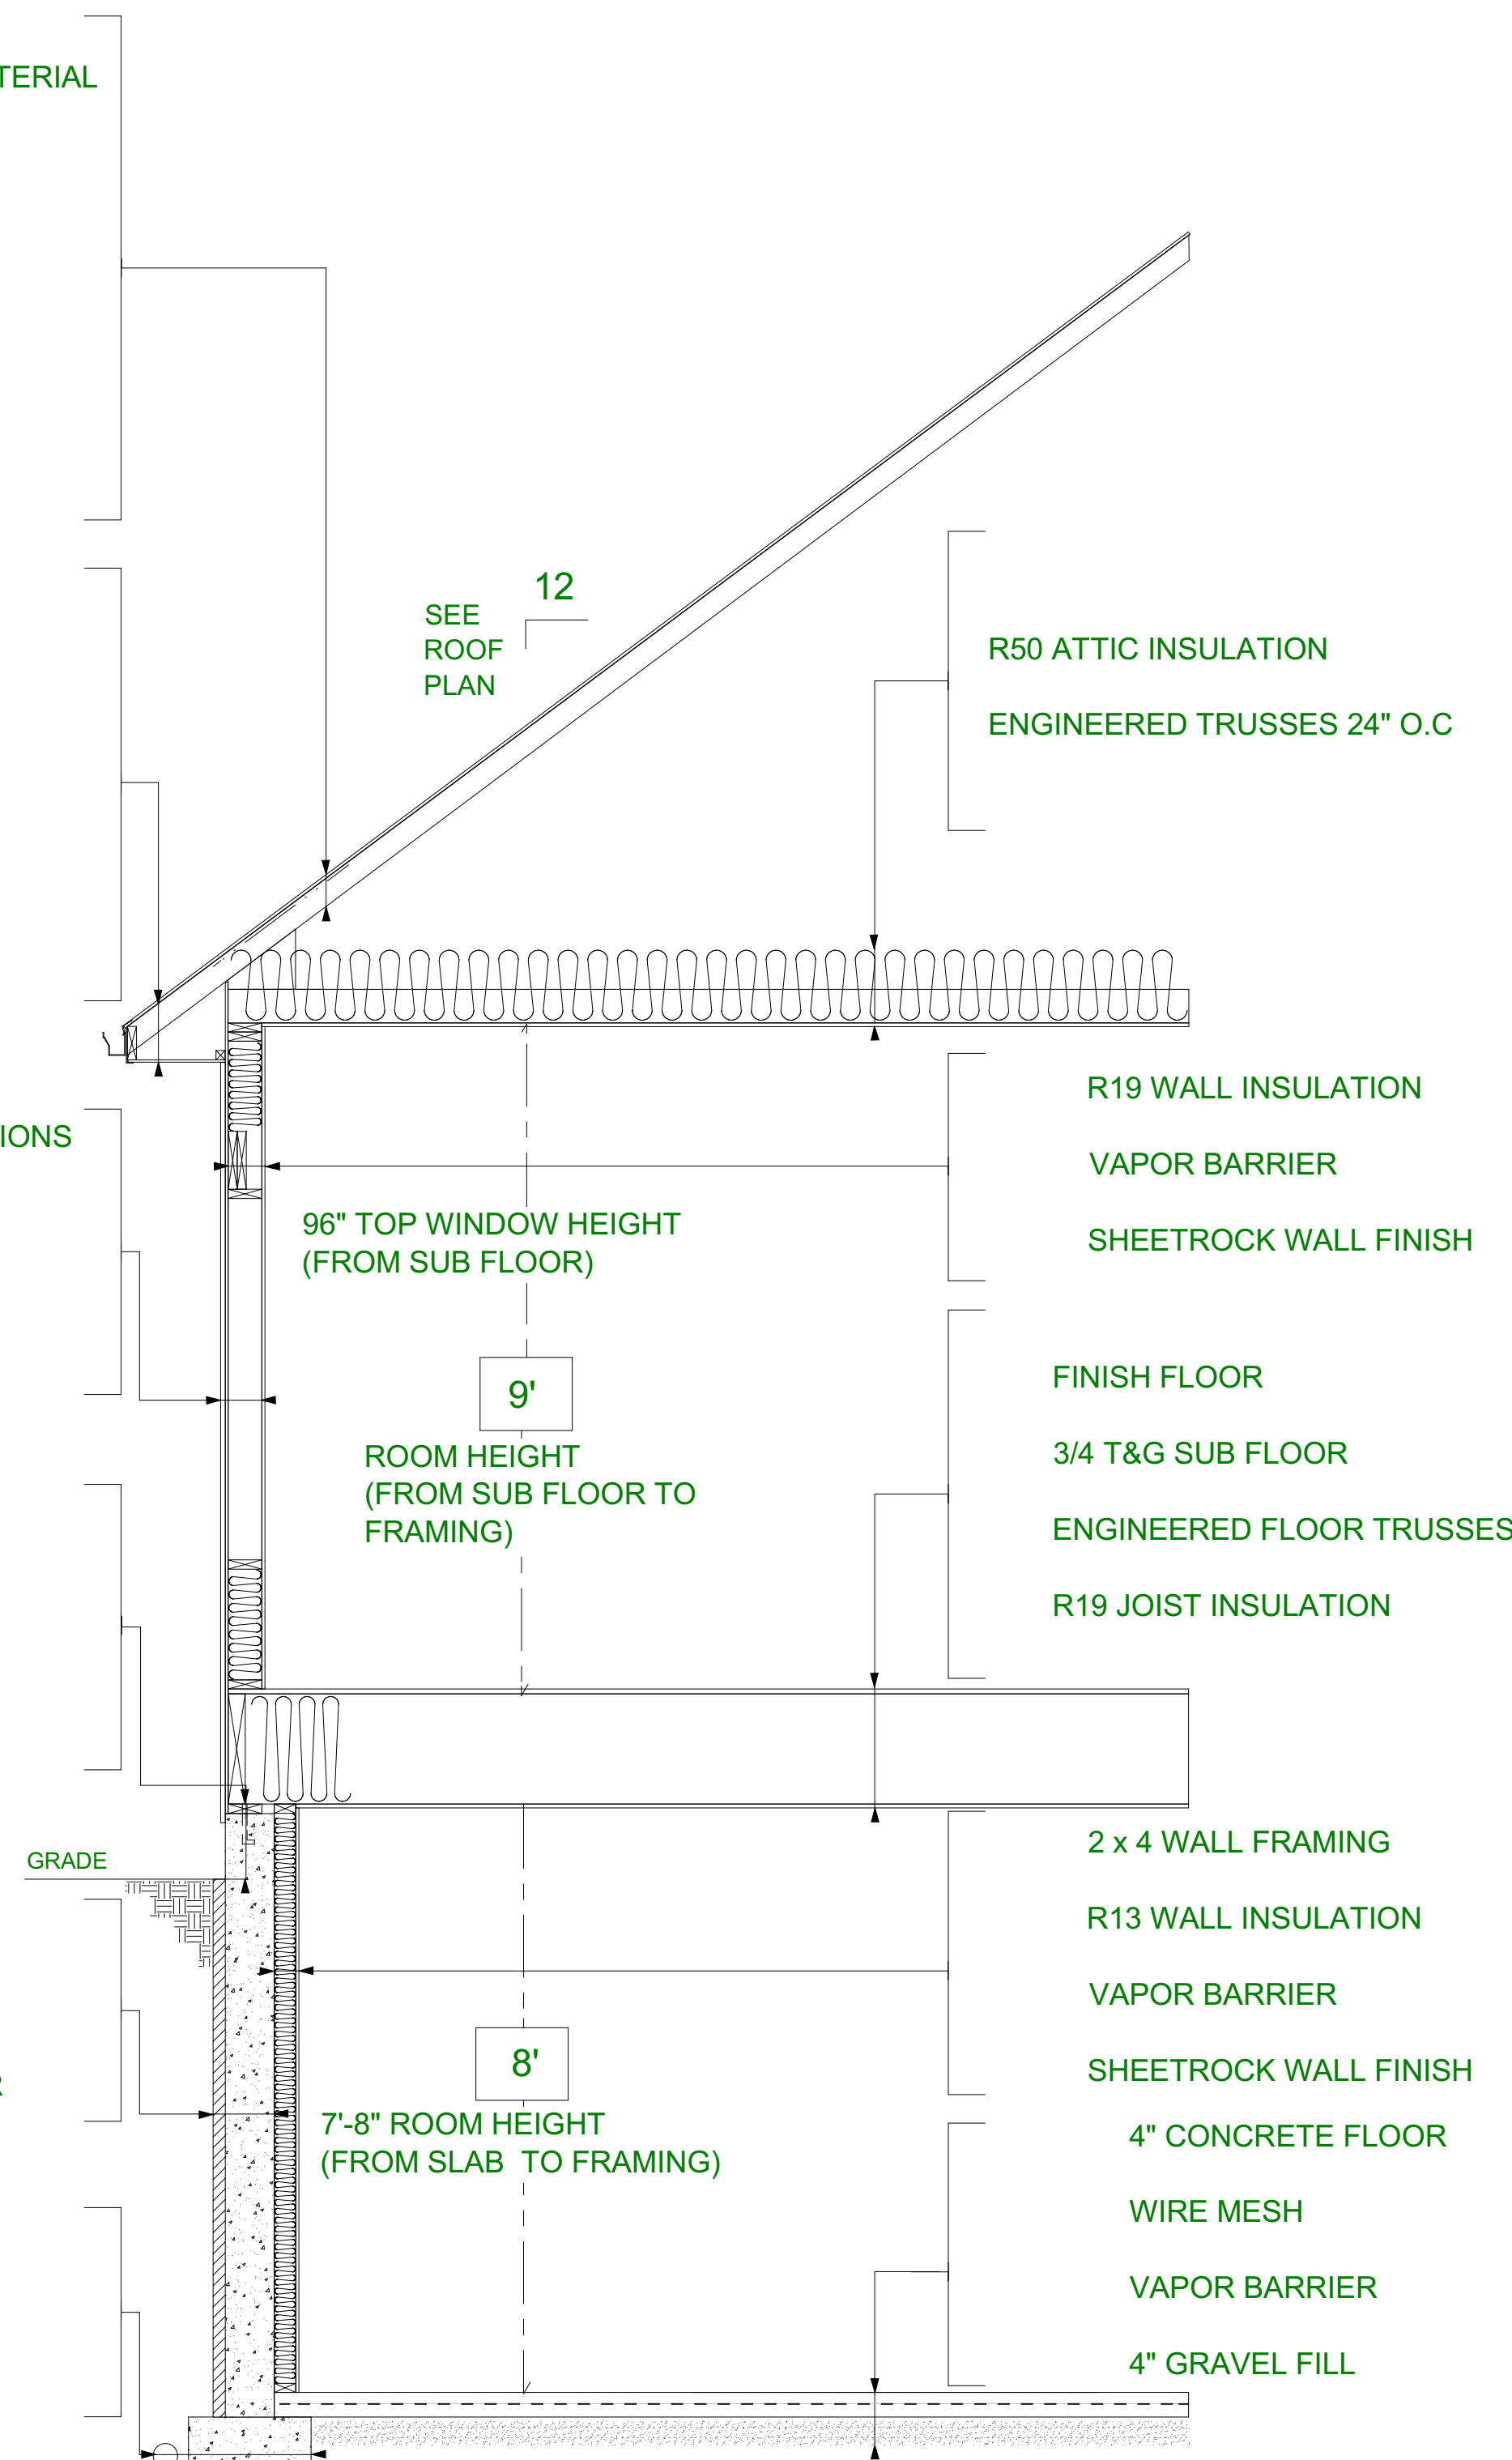


ONE STORY WALL SECTION STANDARD PLATFORM FRAMING
SCALE: NO SCALE

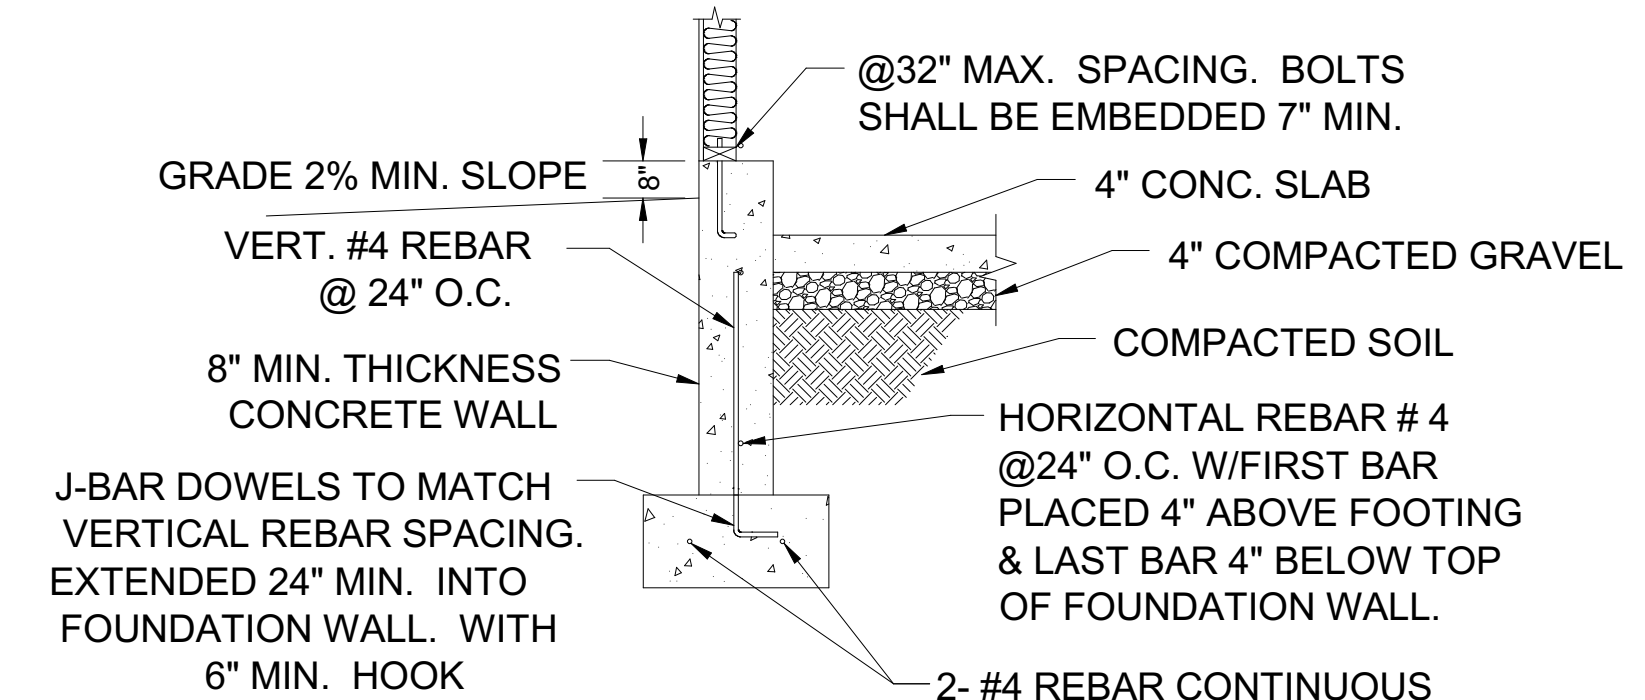

GARAGE WALL SECTION

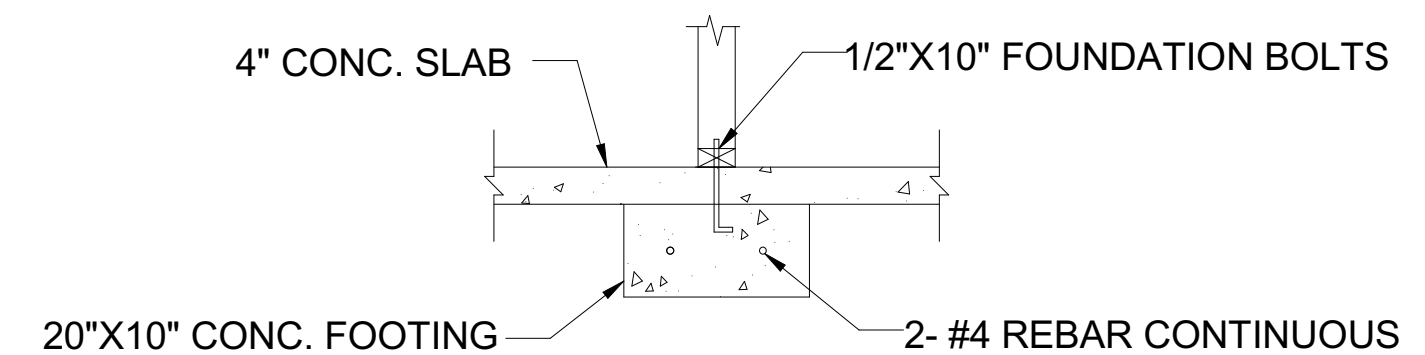

BEARING WALL SECTION

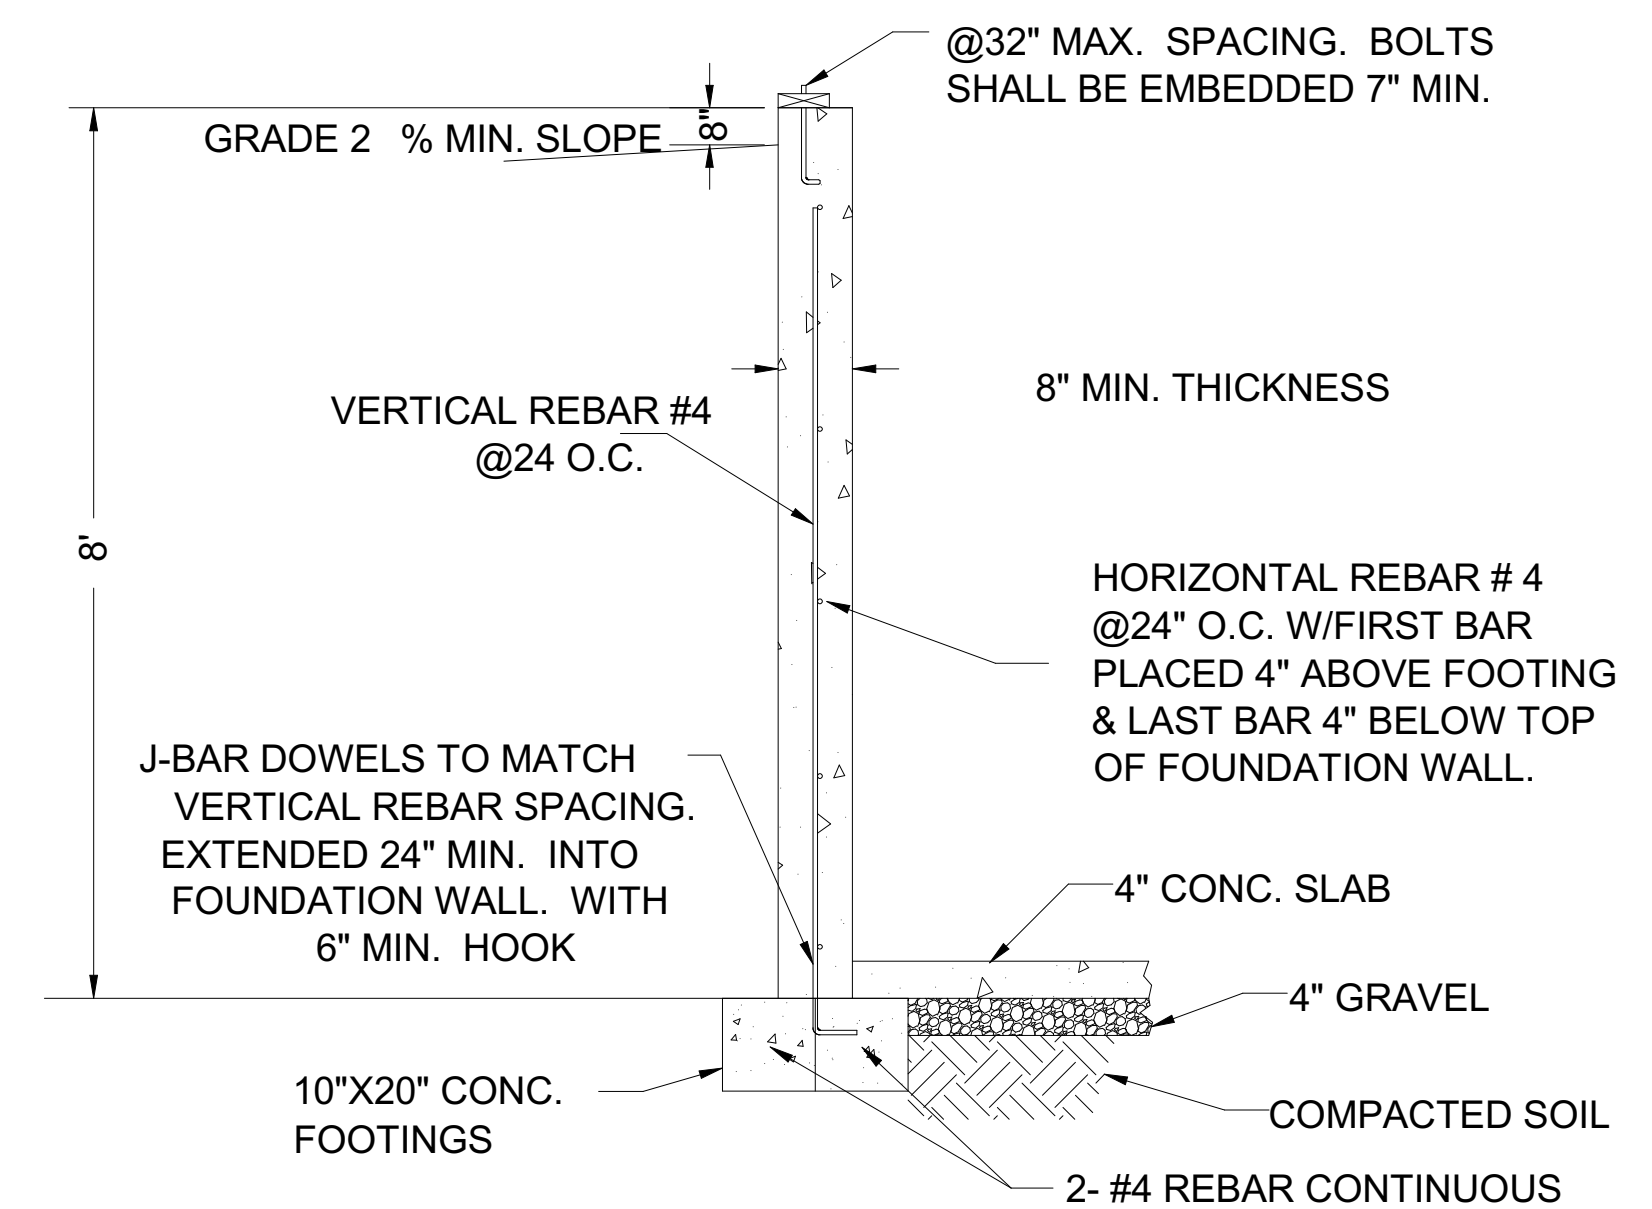


BASEMENT WALL SECTION

Note: Plans are half of stated scale if printed on 11x17 paper

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

IMPORTANT! Identify ALL PROPERTY CORNERS with survey markers in place. Make sure they are secure & visible for inspectors. Your inspection may be rescheduled if corners are not specified _____ (initials)

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

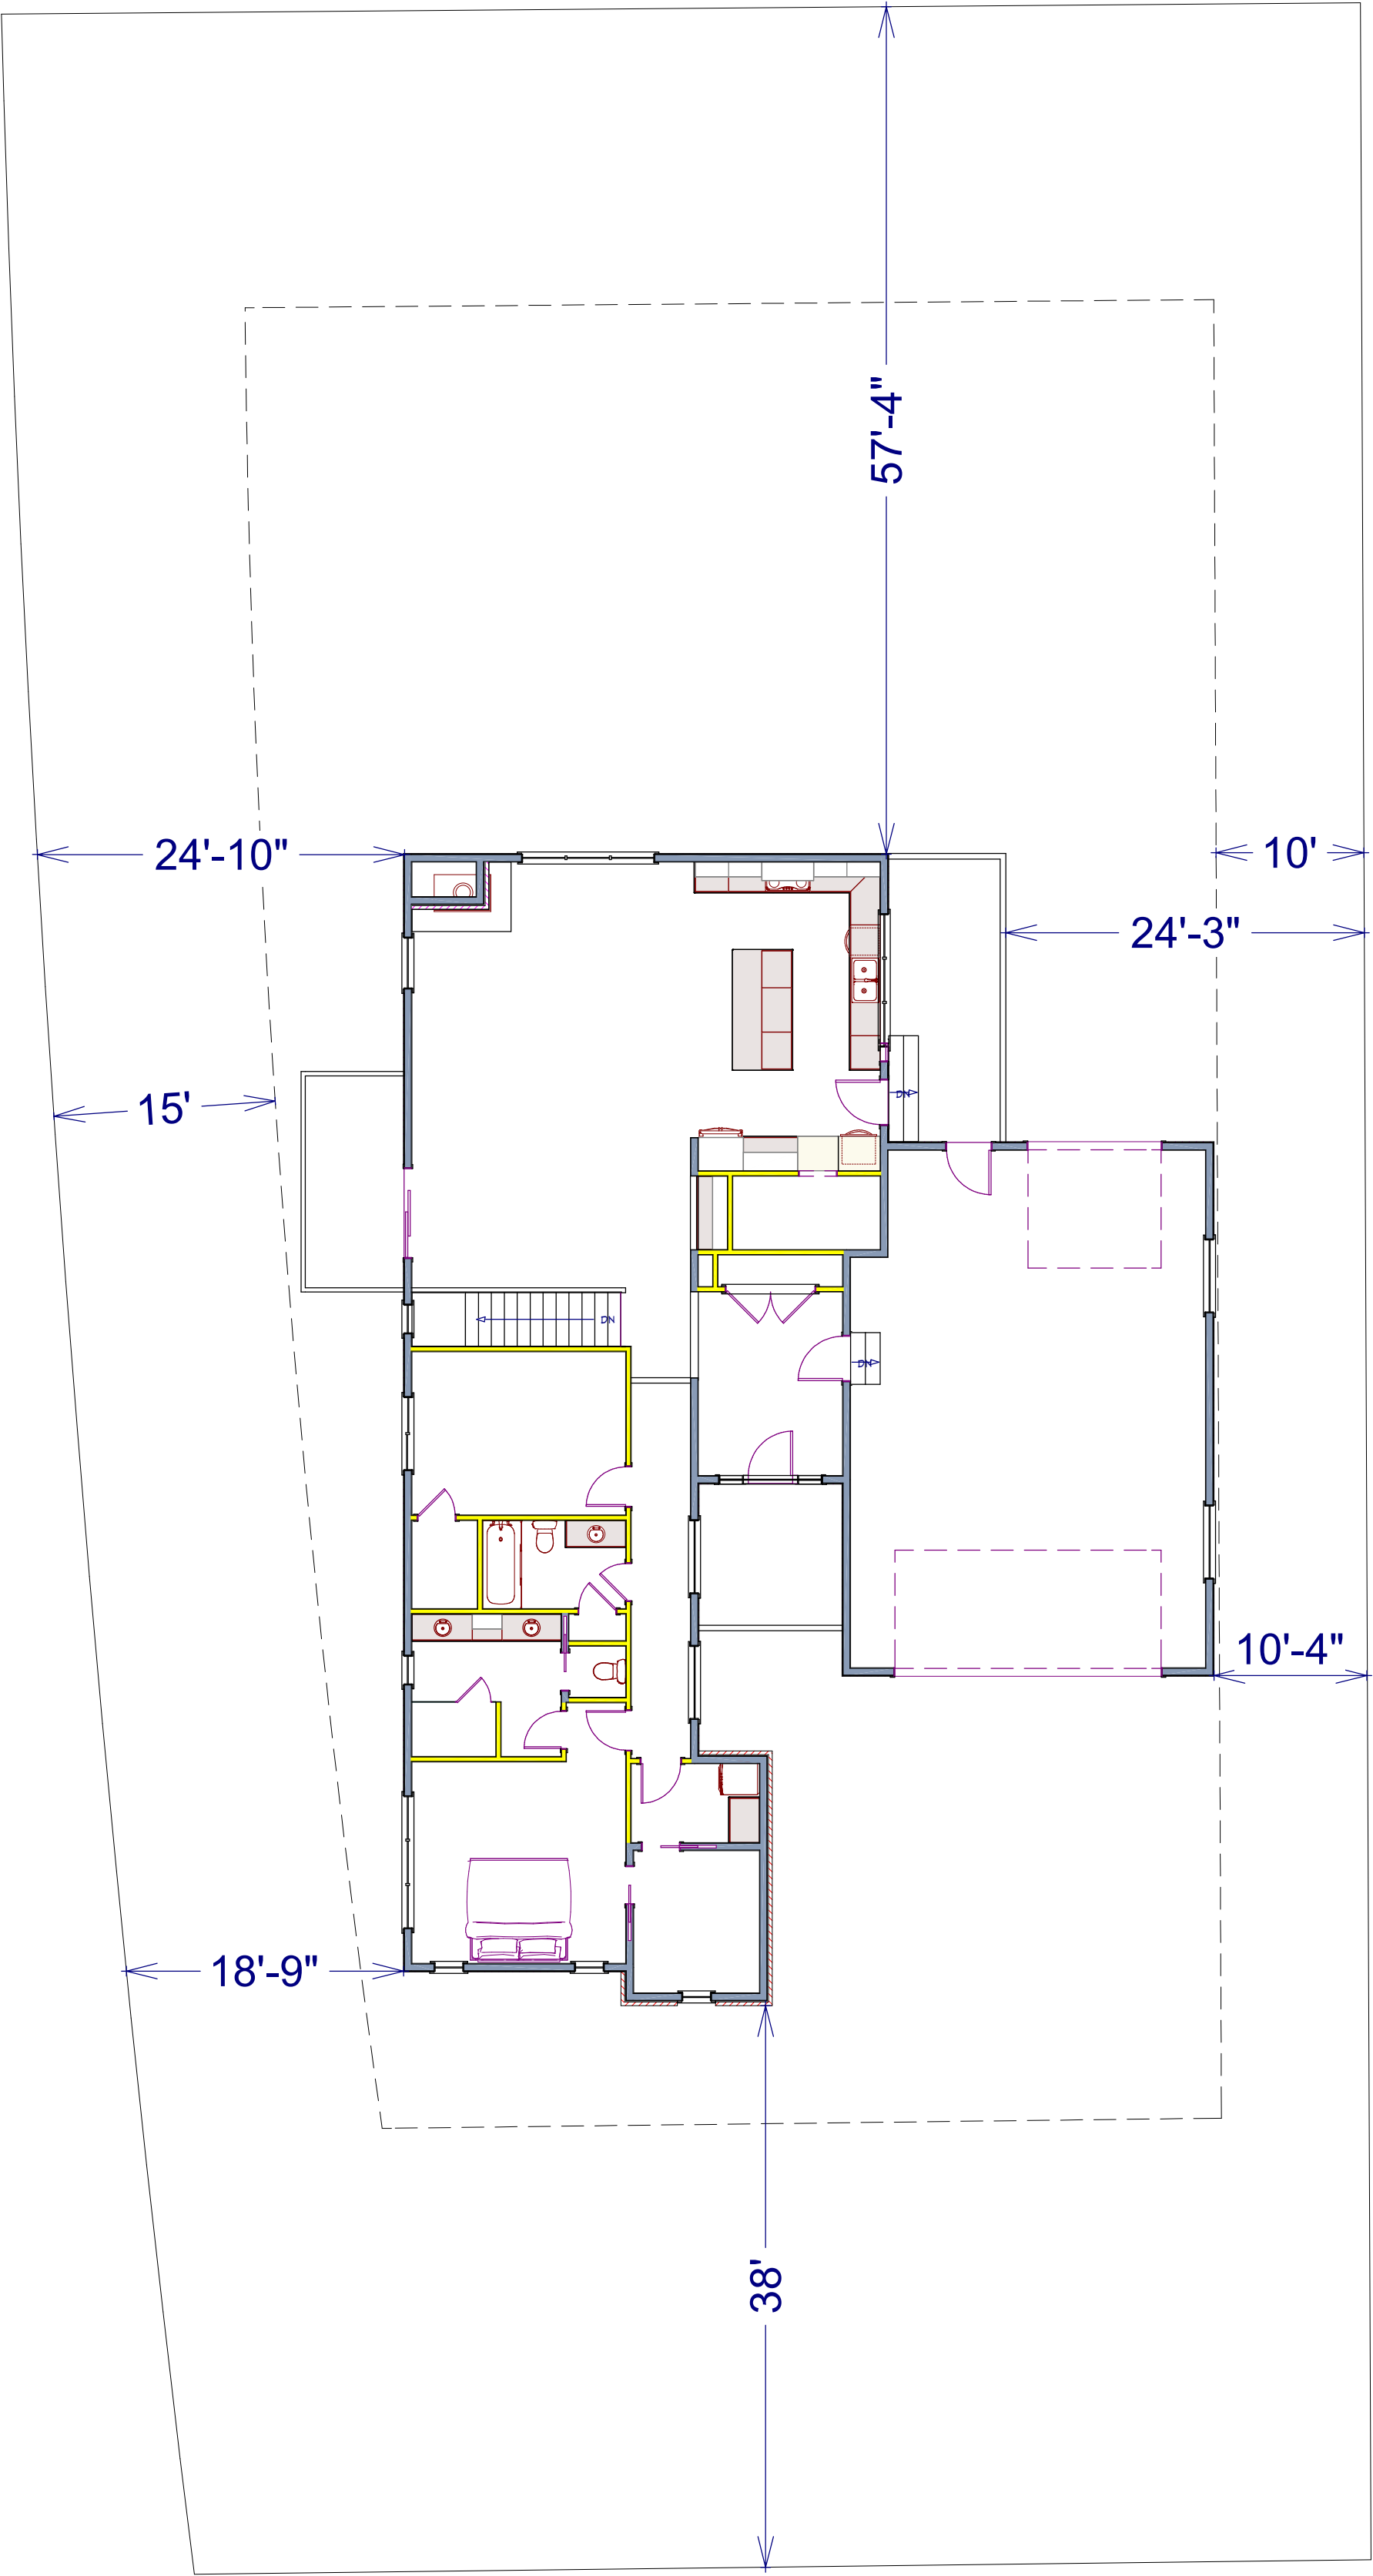

3100 NORTH STREET

PLOT PLAN

SCALE 1"=10'

DANIEL BURT
1165 EAST 3100 NORTH
NORTH LOGAN, UT

PARCEL # 04-277-0006
0.35 ACRES

Note: Plans are half of stated scale if printed on 11x17 paper

Residential Design By Matthew Davidson
435-512-9161 - davidsonhomedesign@gmail.com
Copyright Davidson Home Design


DAVIDSON
Home Design

DANIEL BURT
1165 EAST 3100 NORTH
NORTH LOGAN, UT

CLIENT _____
DATE _____
DRWN BY _____
CHKD BY _____
DATE _____
REVISIONS _____
JOB NO. _____
SHEET NO. _____

A12

FOUNDATION WALL SCHEDULE				
MARK ⁽²⁾	FND8 - 8" THICK CONCRETE FOUNDATION WALLS			
MAX HEIGHT	VERT. STEEL ⁽³⁾	HORIZ. STEEL ⁽⁴⁾	LINTELS ⁽⁵⁾	
			MAX SPAN	MIN DEPTH
2'	#4 @ 32" O.C.	(2) #4	2'	6"
3'	#4 @ 32" O.C.	(3) #4	2'	6"
4'	#4 @ 32" O.C.	(4) #4	3'	6"
6 ⁽⁶⁾	#4 @ 24" O.C.	(5) #4	6'	SEE NOTE 8
8 ⁽⁶⁾	#4 @ 24" O.C.	(6) #4	6'	SEE NOTE 8
9 ⁽⁶⁾	#4 @ 16" O.C.	(7) #4	6'	SEE NOTE 8
1. VALUES IN THE TABLE ABOVE BETWEEN 2'-9" ARE PROVIDED FROM UTAH STATE CODE 15A-3-108.				
2. FOUNDATION WALLS SHALL BE 8" THICK (FND8) U.N.O. (FND.)				
3. VERTICAL REINFORCEMENT SHALL BE PLACED IN THE CENTER OF THE WALL. REBAR EXTENSION BARS INTO THE FOOTINGS SHALL EXTEND UP INTO FOUNDATION WALL A MINIMUM OF 24"				
4. ONE HORIZONTAL BAR SHALL BE PLACED 4" FROM THE TOP OF THE WALL AND 4" FROM THE BOTTOM OF THE WALL WITH ALL OTHER HORIZONTAL BARS EVENLY SPACED. PROVIDE REINFORCING AROUND CORNERS SUCH THAT IT LAPS HORIZONTAL BARS A MINIMUM OF 24"				
5. PROVIDE (2)#4 BARS ABOVE MAX LINTEL SPAN SHOWN IN TABLE WITH (1)#4 ON EACH SIDE AND (1)#4 BELOW THE OPENING. BARS SHALL BE PLACED WITHIN 2" OF THE OPENING AND EXTEND 24" (MIN.) BEYOND THE OPENING. VERTICAL BARS MAY TERMINATE 3" BELOW THE TOP OF WALL.				
6. CONCRETE SHALL CURE A MINIMUM OF 7 DAYS AND HAVE INTERIOR SLAB INSTALLED PRIOR TO ANY BACKFILL. FOUNDATION WALLS 6" IN HEIGHT AND ABOVE DESIGNED FOR TOP SUPPORT. CONTRACTOR SHALL INSTALL FLOOR OR ROOF DIAPHRAGM PRIOR TO BACKFILL AND SHALL NOT COMPACT ANY BACKFILL PLACED AROUND THESE WALLS.				
7. ALL FOUNDATIONS SHALL HAVE 6" MIN. EXPOSED ABOVE GRADE.				
8. PROVIDE 2" DEPTH OF LINTEL FOR EACH FOOT OF OPENING. 6" MINIMUM.				
FOOTING SCHEDULE				
FROST DEPTH FOR ALL EXTERIOR FOOTINGS			30"	
CONTINUOUS FOOTINGS				
MARK ON PLANS	FOOTING WIDTH	FOOTING DEPTH	CONT. REINF.	PERP. REINF.
F18	18"	10"	(2) #4	N/A
F20	20"	10"	(2) #4	N/A
F36	36"	10"	(4) #4	N/A
SPOT FOOTINGS				
MARK ON PLANS	FOOTING SQ DIM.		FOOTING DEPTH	REINF.
SF24	24" X 24"		10"	(3) #4 B.W.
SF42	42" X 42"		10"	(4) #4 B.W.
PIER SCHEDULE				
MARK ON PLANS	PIER DIA.	SQ. PIER DIM.	VERT. REINF.	
P12	12"	12" X 12"	(4) #4 W/ #3 TIES @ 12" O.C.	
1. CONTINUOUS FOOTINGS SHALL BE F18 INTERIOR, F20 EXTERIOR U.N.O.				
2. FOOTINGS SHALL BE PLACED ON COMPACTED NATIVE SOILS AT FROST DEPTH SPECIFIED OR ON ENGINEERED FILL MATERIAL AS SPECIFIED BY A LICENSED GEOTECHNICAL ENGINEER.				
3. FOOTING REINFORCEMENT SHALL BE PLACED 3" FROM BOTTOM OF FOOTING AND LAPPED 24" MINIMUM WHERE NECESSARY				
HOLDOWN SCHEDULE				
MARK	HOLDOWN		NOTES	
8	SIMPSON #LSTD8 (RJ)		CAST IN PLACE	
10	SIMPSON #STHD10 (RJ)		CAST IN PLACE	
14	SIMPSON #STHD14 (RJ)		CAST IN PLACE	
5	SIMPSON #HTT5 ⁽²⁾⁽³⁾		INSTALL $\frac{5}{8}$ " Ø THREADED ROD WITH 3"X3-1/2" MIN. WOOD MEMBER SIZE	
8	SIMPSON #HDU8 ⁽³⁾		INSTALL $\frac{7}{8}$ " Ø THREADED ROD WITH 3"X3-1/2" MIN. WOOD MEMBER SIZE	
11	SIMPSON #HDU11 ⁽³⁾		INSTALL 1" Ø THREADED ROD WITH 3"X5-1/2" MIN. WOOD MEMBER SIZE	
1. FOLLOW SPECIFICATIONS IN LATEST SIMPSON WOOD CONSTRUCTION CONNECTORS CATALOG				
2. ALTERNATE TO ANY CAST IN PLACE STRAP ABOVE				
3. CAST IN THREADED ROD OR DRILL AND EPOXY IN FOUNDATION WALL 16" MIN. EMBED AND WITHIN 6" OF VERTICAL FOUNDATION REBAR USING SIMPSON XP EPOXY OR APPROVED EQUAL				

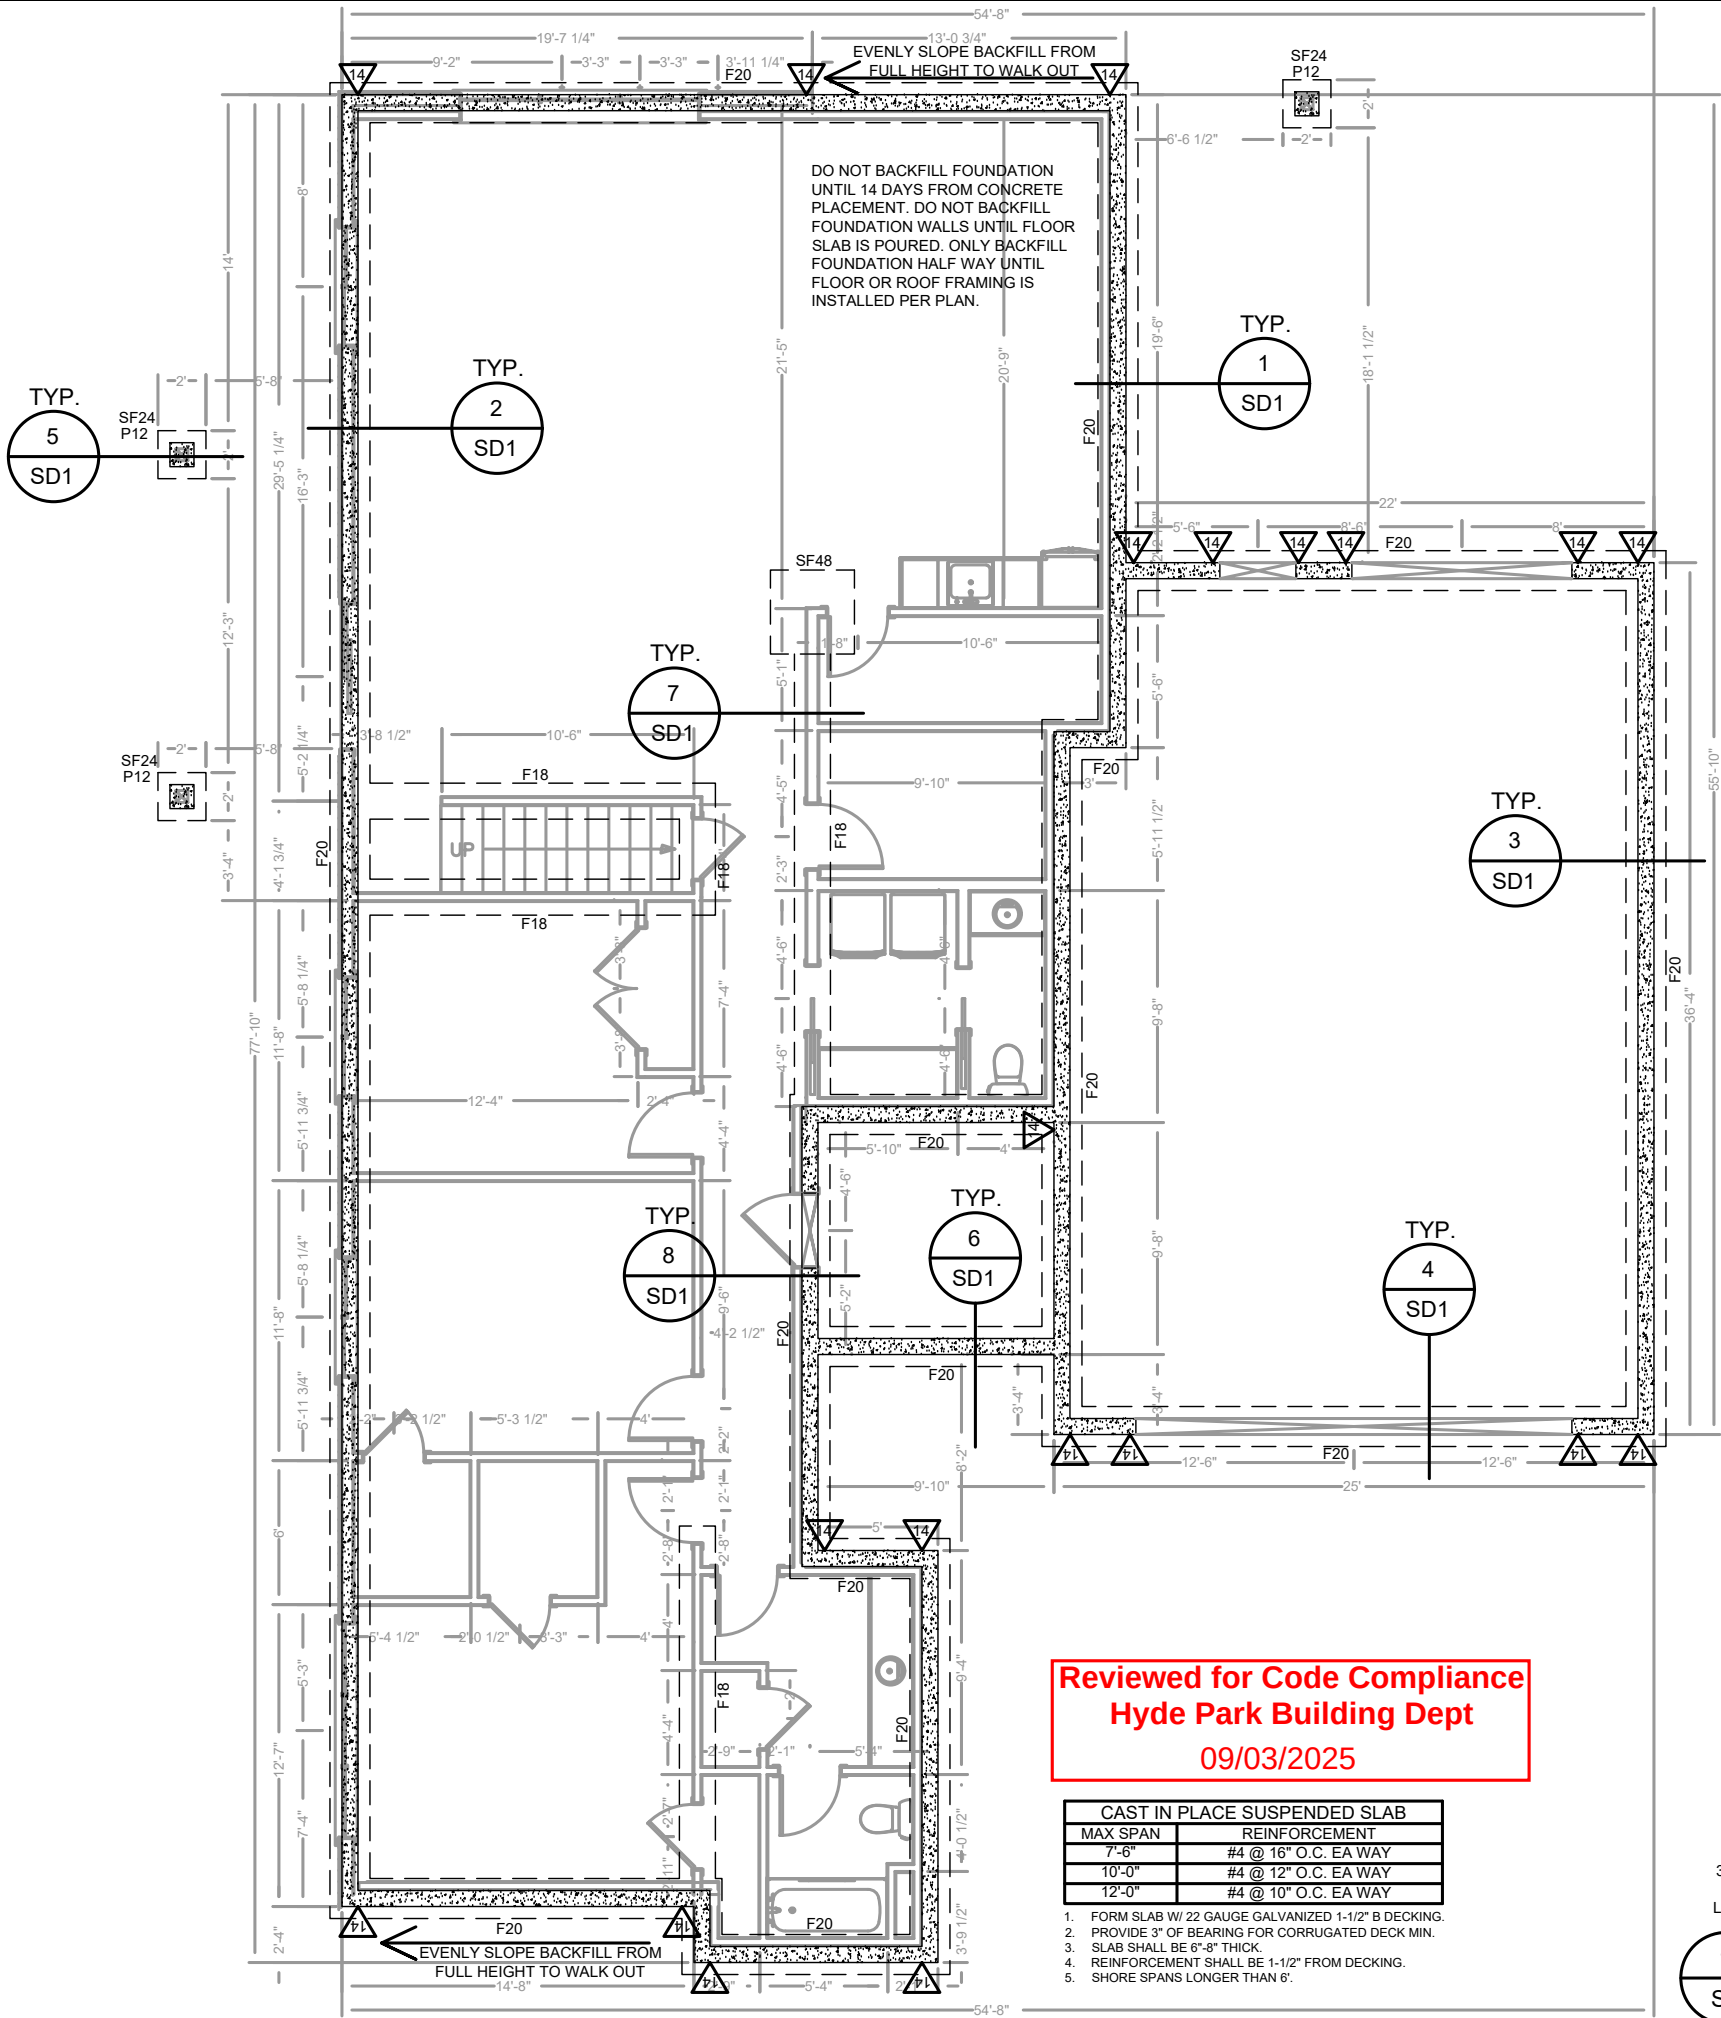

SEE SHEETS SD3 AND SD4 FOR
GENERAL CONSTRUCTION
NOTES AND SCHEDULES



WHITE PINE ENGINEERING
- CIVIL STRUCTURAL -

www.whitepineeng.com

435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

DAVIDSON GASAWAY BURT NORTH LOGAN

1165 EAST 3100 NORTH
NORTH LOGAN, UTAH



DRAFTED BY: J. MICKELSON

DESIGNED BY: J. SAGERS

CHECKED BY: T. HILL


SCALE:

1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

FOUNDATION PLAN

S1

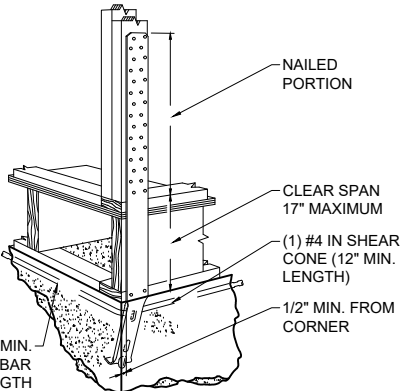

1
S1 #STHD INSTALLATION
NTS

SEE SD3 & SD4 FOR OTHER FRAMING AND SHEAR WALL SPECIFICATIONS NOT LISTED BELOW.

BEAM SCHEDULE

MARK	QUANTITY	PLY SIZE	TYPE
(#)2X6	SEE PLAN	2X6	SAWN
(#)2X8	SEE PLAN	2X8	SAWN
(#)2X10	SEE PLAN	2X10	SAWN
(#)2X12	SEE PLAN	2X12	SAWN
(#)5-1/2	SEE PLAN	1-3/4" X 5-1/2"	LVL
(#)7-1/4	SEE PLAN	1-3/4" X 7-1/4"	LVL
(#)9-1/2	SEE PLAN	1-3/4" X 9-1/2"	LVL
(#)11-7/8	SEE PLAN	1-3/4" X 11-7/8"	LVL
(#)14	SEE PLAN	1-3/4" X 14"	LVL
(#)16	SEE PLAN	1-3/4" X 16"	LVL
(#)18	SEE PLAN	1-3/4" X 18"	LVL
_X_DFRS	(1)	SEE PLAN	TIMBER
_X_GLB	(1)	SEE PLAN	GLULAM
W_X_	(1)	SEE PLAN	STEEL

- ALL SAWN LUMBER SHALL BE DF-L #2 MIN.
- ALL LVL BEAMS SHALL HAVE E=1900 KSI MIN. AND Fb=2600 PSI MIN.
- ALL TIMBER SHALL BE DF-L #1 MIN.
- ALL GLULAM BEAMS SHALL BE WESTERN 24F-V4 MIN.
- ALL STEEL BEAMS SHALL BE ASTM A992 (Fy=50 KSI MIN., Fu=65 KSI MIN.)
- EACH PLY SHALL BE CONTINUOUS ALONG BEAM LENGTH.
- JOIN PLYS TOGETHER W/ (2)16D @ 12" O.C. EACH.
- PROVIDE (1) 2X TRIMMER AND (1) 2X KING STUD FOR BEAMS SPANNING UP TO 4'-0". PROVIDE (2) 2X TRIMMER AND (2) 2X KING STUDS FOR SPANS 4'-1" AND GREATER U.N.O.
- PROVIDE #LCE4 OR 12" LONG #CS16 ROTATED TO 45 DEGREES TO ATTACH HEADERS TO TRIMMERS ON SPANS 6'-0" AND GREATER.
- ANY BEAM MAY HAVE UP TO A 1" DIA HOLE DRILLED THROUGH, AS LONG AS THE LOCATION OF THE HOLE IS IN THE MIDDLE THIRD OF THE SPAN AND THE MIDDLE THIRD OF THE DEPTH. FOR OTHER SIZES/LOCATIONS, CONTACT THE ENGINEER.
- (BEAM #) SHOWN ON PLANS CORRESPONDS WITH BEAM CALCULATIONS PROVIDED IN THE STRUCTURAL CALCULATION PACKET.

COLUMN SCHEDULE


MARK	APPROX. DIMENSIONS	CAP/BASE TO BEAM	BASE TO CONC.
4X4	3-1/2" X 3-1/2"	#BC4	#ABU44Z
4X6	3-1/2" X 5-1/2"	#BC46	#ABU46Z
6X6	5-1/2" X 5-1/2"	#BC6	#ABU66Z
6X6R	6" X 6"	#BC6R	#ABU66RZ
8X8	7-1/2" X 7-1/2"	#BC8	#ABU88Z
8X8R	8" X 8"	SEE PLAN	#ABU88RZ
10X10	9-1/2" X 9-1/2"	SEE PLAN	#ABU1010Z
10X10R	10" X 10"	SEE PLAN	#ABU1010RZ
12X12	11-1/2" X 11-1/2"	SEE PLAN	#ABU1212Z
12X12R	12" X 12"	SEE PLAN	#ABU1212RZ
HSS_X_X_	STEEL COLUMN PER PLAN	CONNECTION AND BASE PLATE PER PLAN	

- ALL POSTS AND COLUMNS SHALL BE DF-L #1 MIN.
- ALL STEEL HSS COLUMNS SHALL BE ASTM A500 GR. C (Fy=50 KSI MIN., Fu=65 KSI MIN.)

VERTICAL STRAP SCHEDULE

MARK	HOLDOWN	NOTES
16	SIMPSON #CS16	PROVIDE 12" LAP
37	SIMPSON #MST37	PROVIDE (2) 2X STUDS
48	SIMPSON #MST48	PROVIDE (2) 2X STUDS
60	SIMPSON #MST60	PROVIDE (2) 2X STUDS
72	SIMPSON #MST72	PROVIDE (2) 2X STUDS

- FOLLOW INSTALLATION SPECIFICATIONS IN LATEST SIMPSON WOOD CONSTRUCTION CONNECTORS CATALOG.
- WHEN STRAPPING FLOOR TO FLOOR, CENTER STRAP ON RIM JOIST AND NAIL TO STUDS ABOVE AND BELOW.

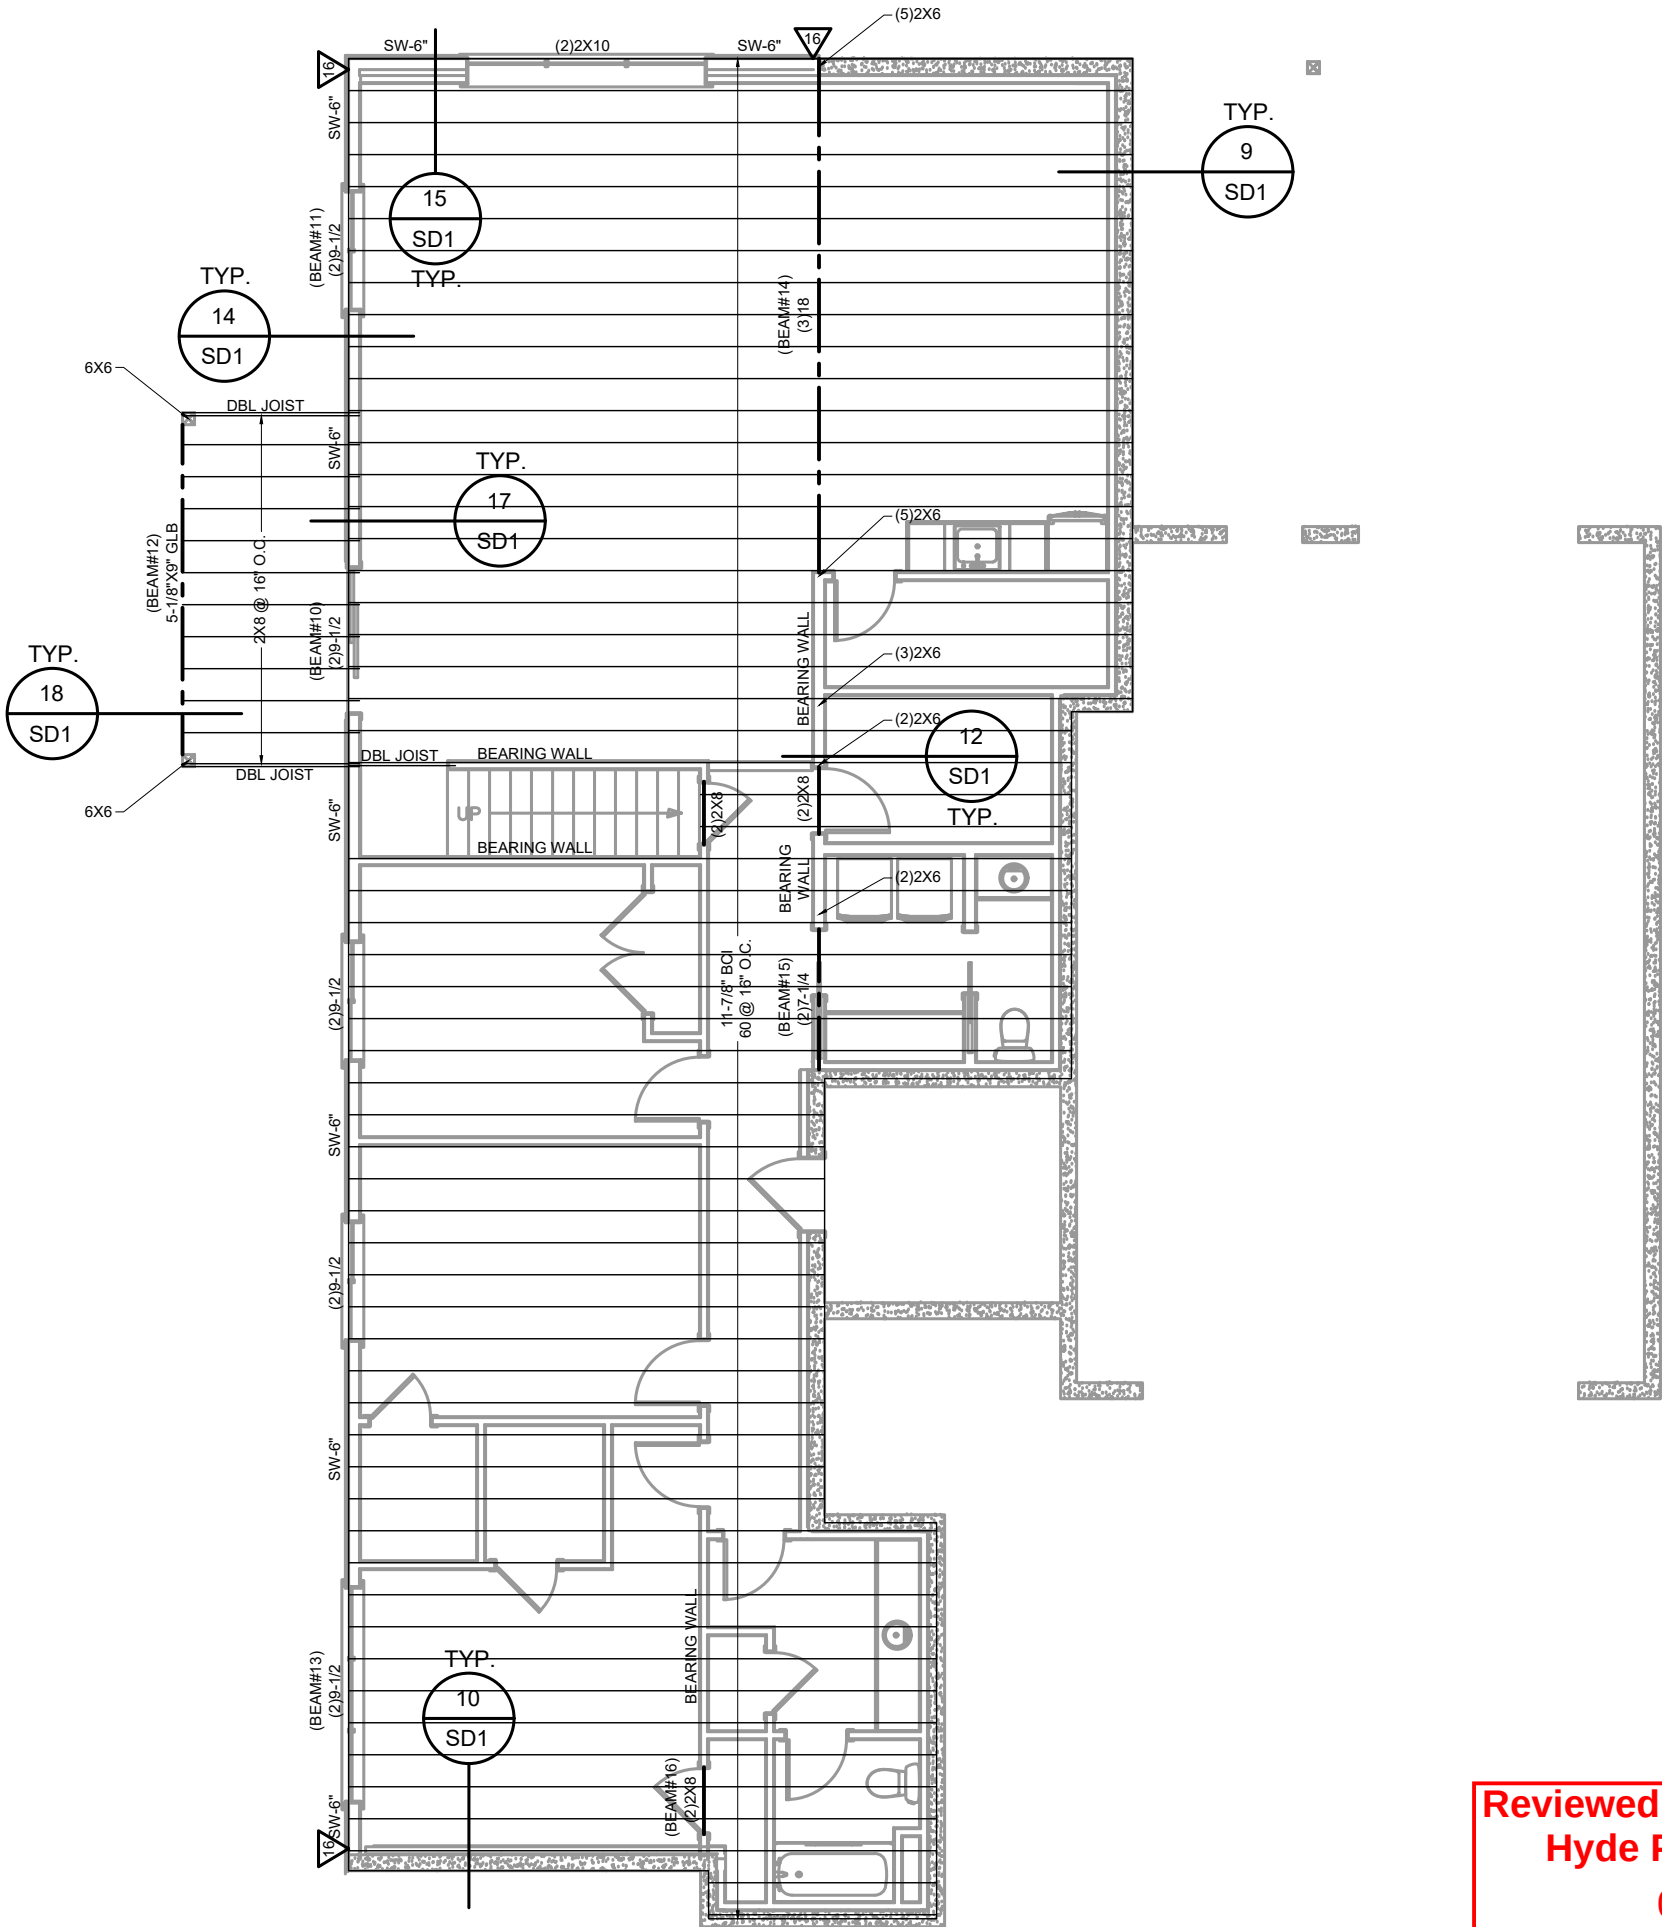

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025



WHITE PINE ENGINEERING
- CIVIL STRUCTURAL -

www.whitepineeng.com

435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

DAVIDSON GASAWAY BURT NORTH LOGAN

1165 EAST 3100 NORTH
NORTH LOGAN, UTAH



DRAFTED BY: J. MICKELSON

DESIGNED BY: J. SAGERS

CHECKED BY: T. HILL

SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

FIRST FLOOR
FRAMING PLAN

S2

SEE SD3 & SD4 FOR OTHER FRAMING AND SHEAR WALL SPECIFICATIONS NOT LISTED BELOW.

BEAM SCHEDULE

MARK	QUANTITY	PLY SIZE	TYPE
(#)2X6	SEE PLAN	2X6	SAWN
(#)2X8	SEE PLAN	2X8	SAWN
(#)2X10	SEE PLAN	2X10	SAWN
(#)2X12	SEE PLAN	2X12	SAWN
(#)5-1/2	SEE PLAN	1-3/4" X 5-1/2"	LVL
(#)7-1/4	SEE PLAN	1-3/4" X 7-1/4"	LVL
(#)9-1/2	SEE PLAN	1-3/4" X 9-1/2"	LVL
(#)11-7/8	SEE PLAN	1-3/4" X 11-7/8"	LVL
(#)14	SEE PLAN	1-3/4" X 14"	LVL
(#)16	SEE PLAN	1-3/4" X 16"	LVL
(#)18	SEE PLAN	1-3/4" X 18"	LVL
_X_DFRS	(1)	SEE PLAN	TIMBER
_X_GLB	(1)	SEE PLAN	GLULAM
W_X_	(1)	SEE PLAN	STEEL

- ALL SAWN LUMBER SHALL BE DF-L #2 MIN.
- ALL LVL BEAMS SHALL HAVE E=1900 KSI MIN. AND Fb=2600 PSI MIN.
- ALL TIMBER SHALL BE DF-L #1 MIN.
- ALL GLULAM BEAMS SHALL BE WESTERN 24F-V4 MIN.
- ALL STEEL BEAMS SHALL BE ASTM A992 (Fy=50 KSI MIN., Fu=65 KSI MIN.)
- EACH PLY SHALL BE CONTINUOUS ALONG BEAM LENGTH.
- JOIN PLYS TOGETHER W/ (2)16D @ 12" O.C. EACH.
- PROVIDE (1) 2X TRIMMER AND (1) 2X KING STUD FOR BEAMS SPANNING UP TO 4'-0". PROVIDE (2) 2X TRIMMER AND (2) 2X KING STUDS FOR SPANS 4'-1" AND GREATER U.N.O.
- PROVIDE #LCE4 OR 12" LONG #CS16 ROTATED TO 45 DEGREES TO ATTACH HEADERS TO TRIMMERS ON SPANS 6'-0" AND GREATER.
- ANY BEAM MAY HAVE UP TO A 1" DIA HOLE DRILLED THROUGH, AS LONG AS THE LOCATION OF THE HOLE IS IN THE MIDDLE THIRD OF THE SPAN AND THE MIDDLE THIRD OF THE DEPTH. FOR OTHER SIZES/LOCATIONS, CONTACT THE ENGINEER.
- (BEAM #) SHOWN ON PLANS CORRESPONDS WITH BEAM CALCULATIONS PROVIDED IN THE STRUCTURAL CALCULATION PACKET.

COLUMN SCHEDULE


MARK	APPROX. DIMENSIONS	CAP/BASE TO BEAM	BASE TO CONC.
4X4	3-1/2" X 3-1/2"	#BC4	#ABU44Z
4X6	3-1/2" X 5-1/2"	#BC46	#ABU46Z
6X6	5-1/2" X 5-1/2"	#BC6	#ABU66Z
6X6R	6" X 6"	#BC6R	#ABU66RZ
8X8	7-1/2" X 7-1/2"	#BC8	#ABU88Z
8X8R	8" X 8"	SEE PLAN	#ABU88RZ
10X10	9-1/2" X 9-1/2"	SEE PLAN	#ABU1010Z
10X10R	10" X 10"	SEE PLAN	#ABU1010RZ
12X12	11-1/2" X 11-1/2"	SEE PLAN	#ABU1212Z
12X12R	12" X 12"	SEE PLAN	#ABU1212RZ
HSS_X_X_	STEEL COLUMN PER PLAN	CONNECTION AND BASE PLATE PER PLAN	

- ALL POSTS AND COLUMNS SHALL BE DF-L #1 MIN.
- ALL STEEL HSS COLUMNS SHALL BE ASTM A500 GR. C (Fy=50 KSI MIN., Fu=65 KSI MIN.)

VERTICAL STRAP SCHEDULE

MARK	HOLDOWN	NOTES
16	SIMPSON #CS16	PROVIDE 12" LAP
37	SIMPSON #MST37	PROVIDE (2) 2X STUDS
48	SIMPSON #MST48	PROVIDE (2) 2X STUDS
60	SIMPSON #MST60	PROVIDE (2) 2X STUDS
72	SIMPSON #MST72	PROVIDE (2) 2X STUDS

- FOLLOW INSTALLATION SPECIFICATIONS IN LATEST SIMPSON WOOD CONSTRUCTION CONNECTORS CATALOG.
- WHEN STRAPPING FLOOR TO FLOOR, CENTER STRAP ON RIM JOIST AND NAIL TO STUDS ABOVE AND BELOW.

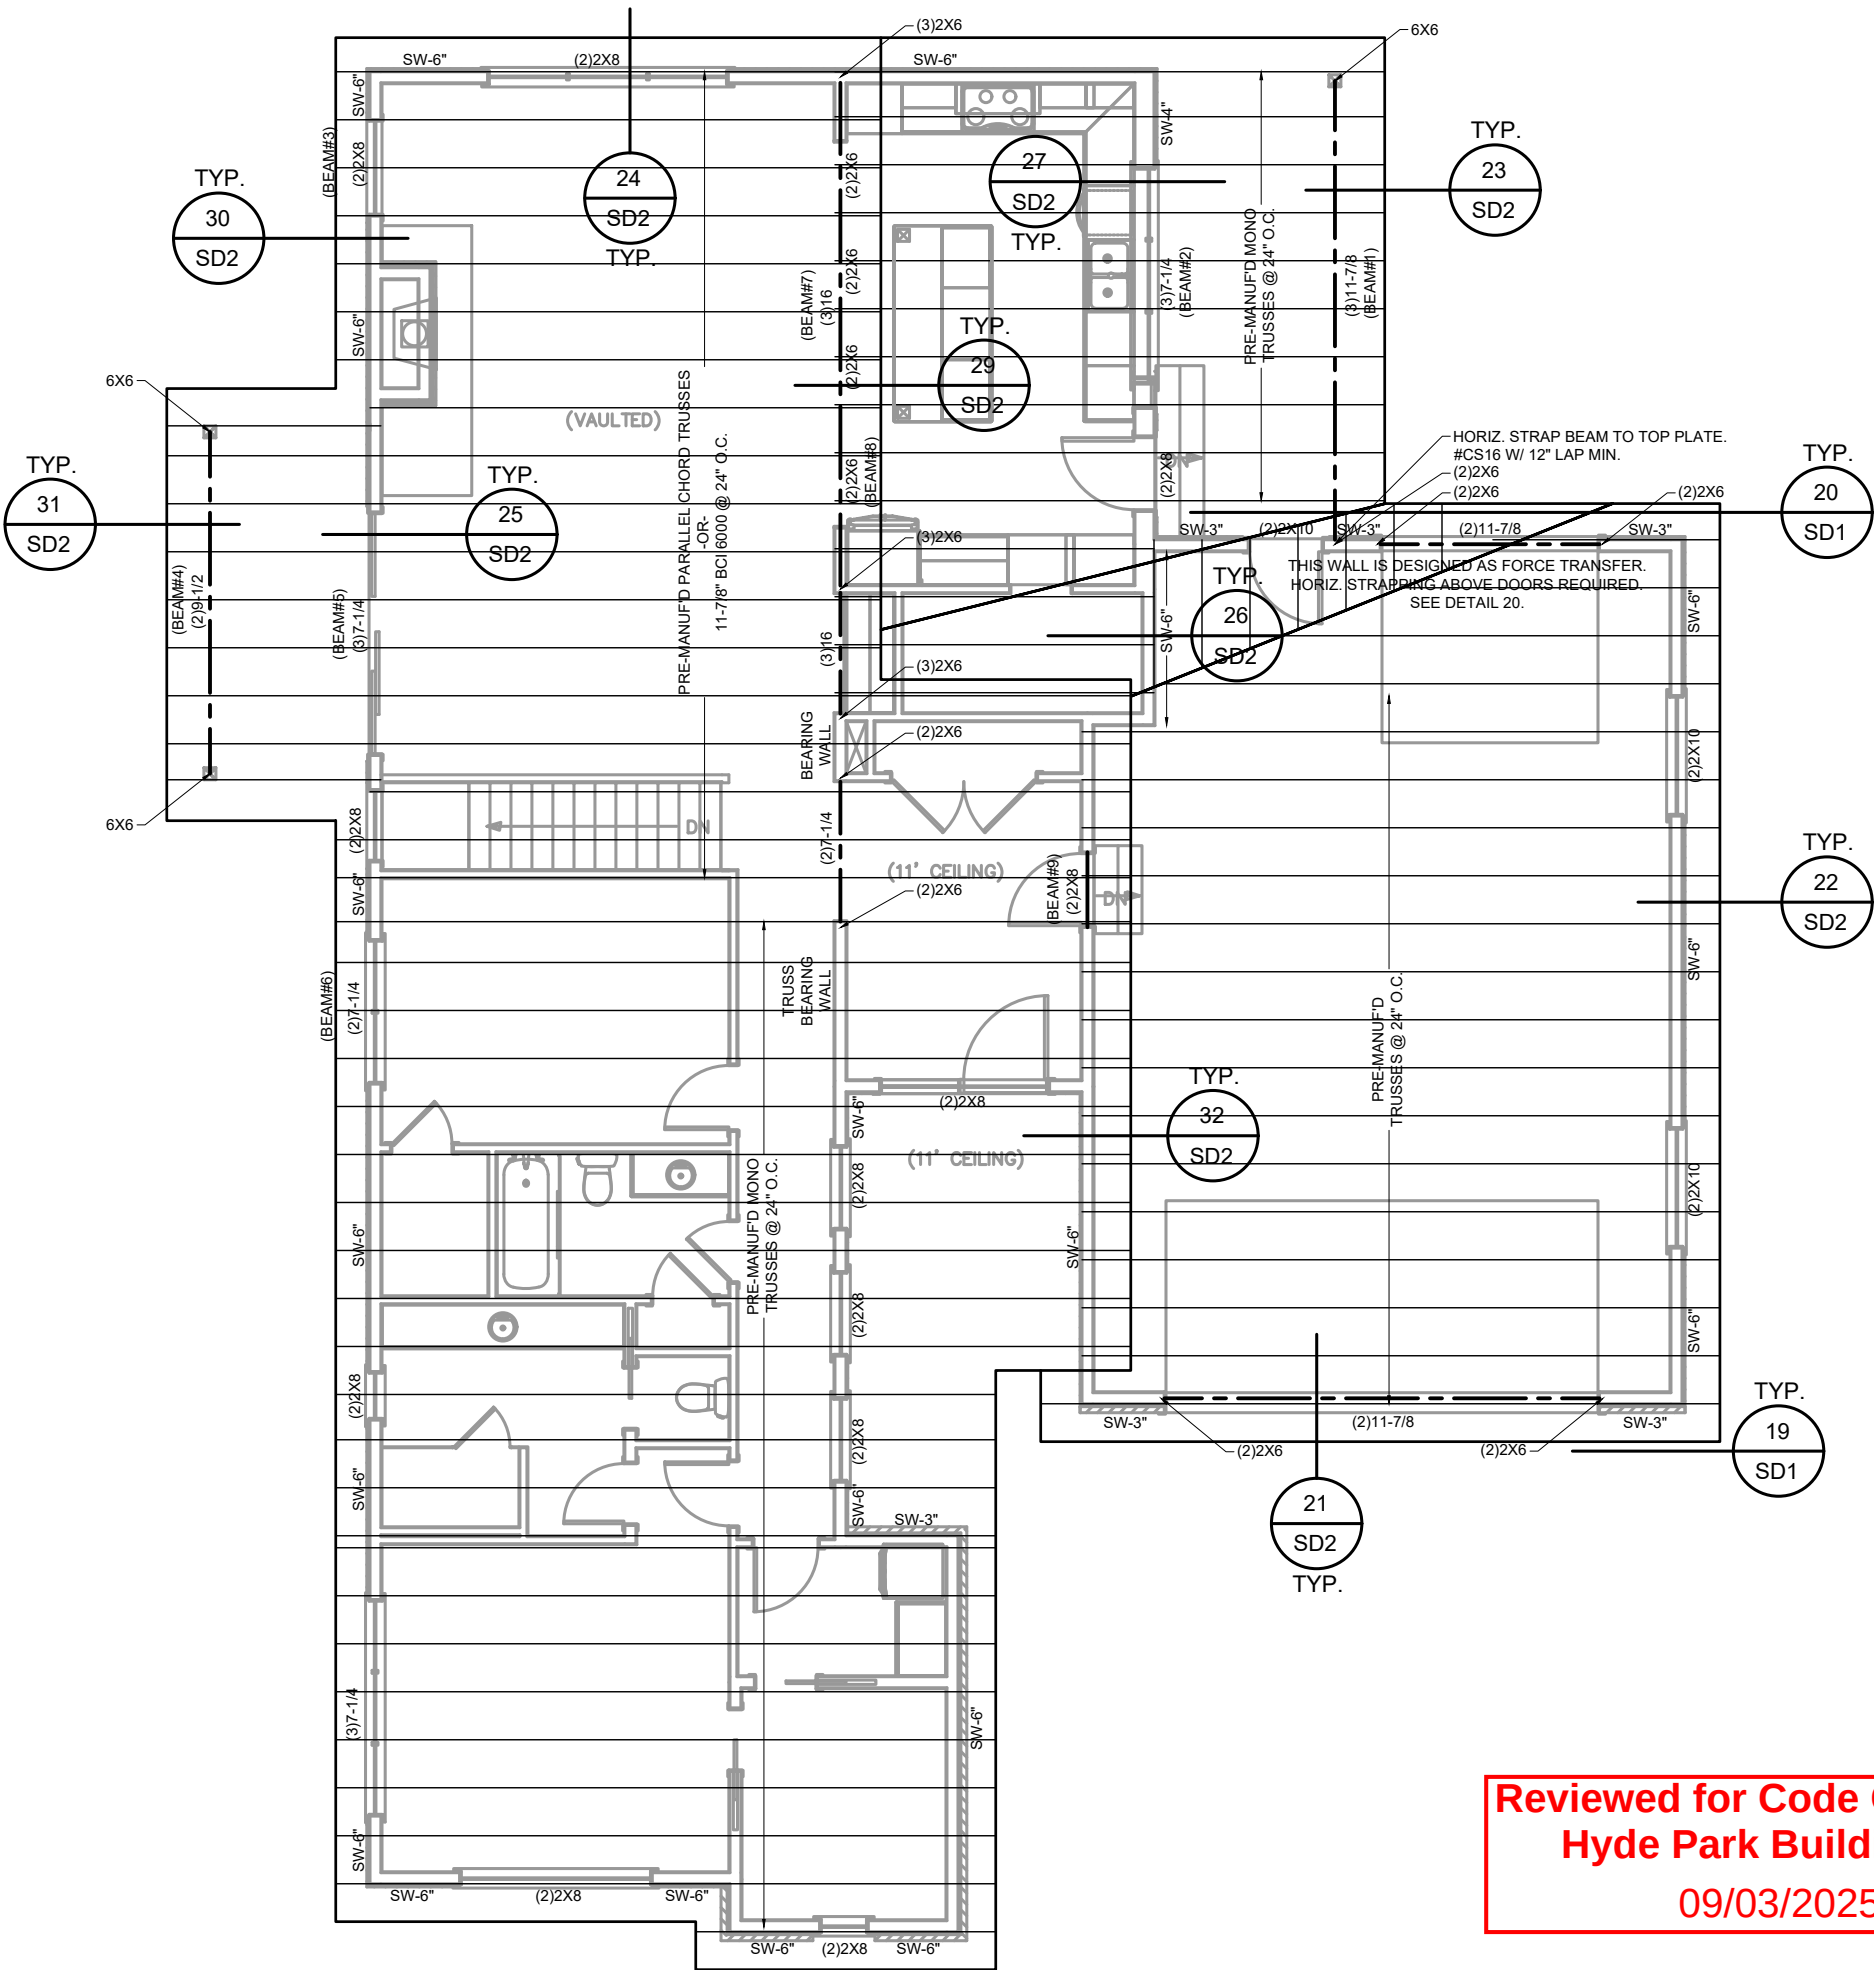

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025



WHITE PINE ENGINEERING
- CIVIL STRUCTURAL -


www.whitepineeng.com

435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

DAVIDSON GASAWAY BURT NORTH LOGAN

1165 EAST 3100 NORTH
NORTH LOGAN, UTAH



DRAFTED BY: J. MICKELSON

DESIGNED BY: J. SAGERS

CHECKED BY: T. HILL


SCALE:

1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

ROOF FRAMING PLAN

S3

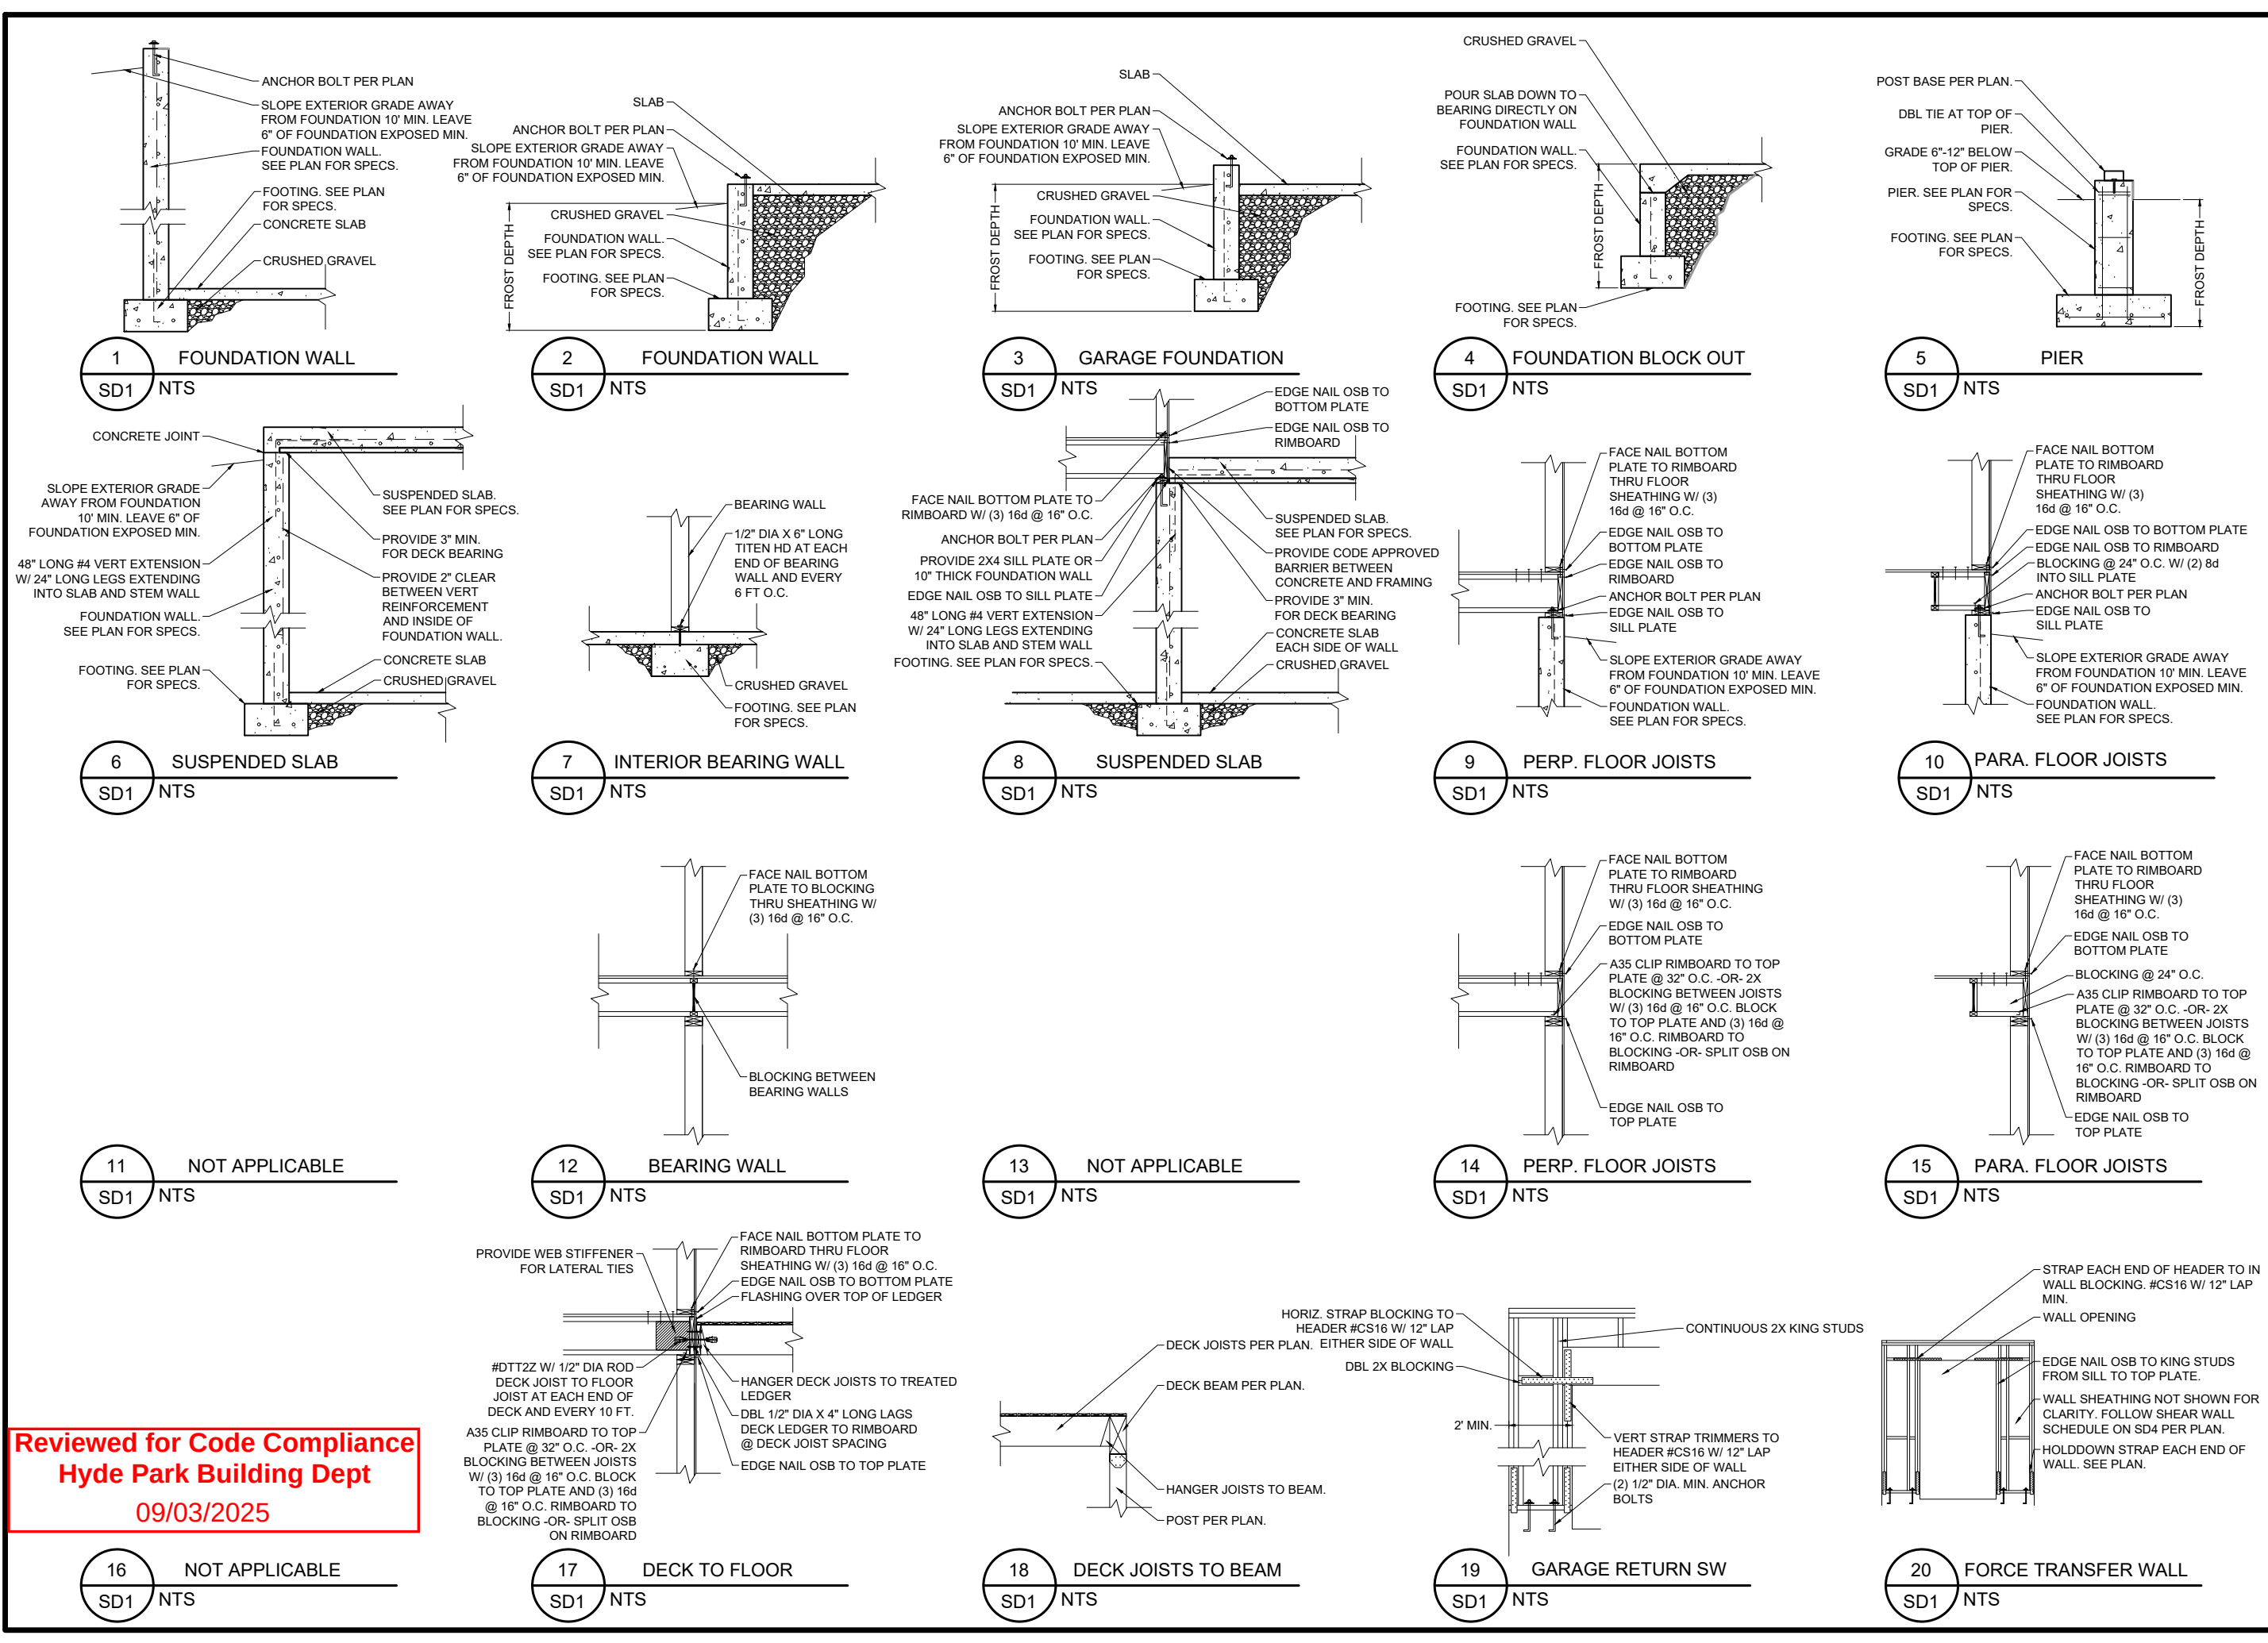

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025




WHITE PINE ENGINEERING
- CIVIL STRUCTURAL -
www.whitepineeng.com

435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318


DAVIDSON GASAWAY BURT NORTH LOGAN

1165 EAST 3100 NORTH
NORTH LOGAN, UTAH




JACKSON D. SAGERS
13258211
7/18/2025
STATE OF UTAH


DRAFTED BY: J. MICKELSON
DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL
SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)
SHEET TITLE:
STRUCTURAL DETAILS
SD1

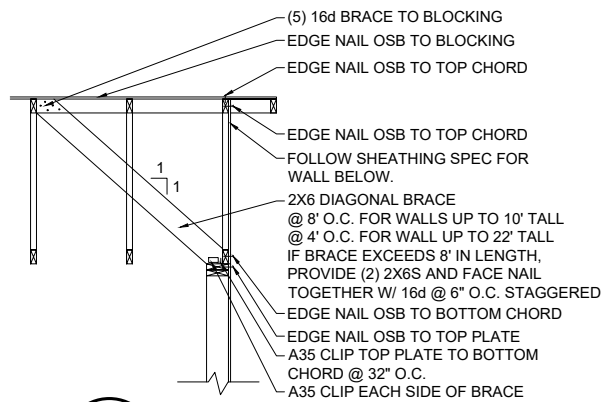


21 PARA. ROOF TRUSS
SD2 NTS

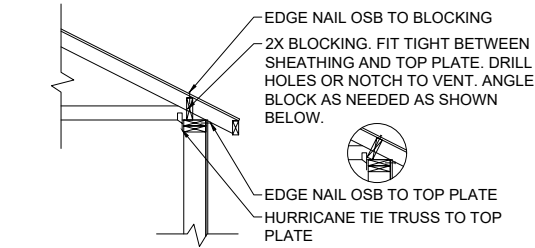


22 PERP. ROOF TRUSS
SD2 NTS

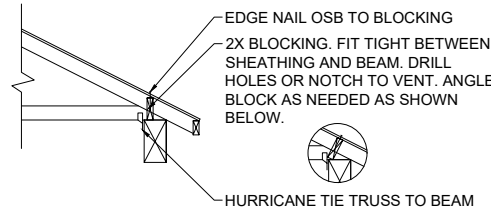


23 PERP. ROOF TRUSS
SD2 NTS

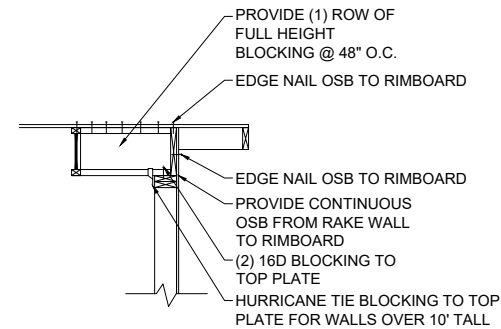


24 PARA. ROOF JOISTS
SD2 NTS

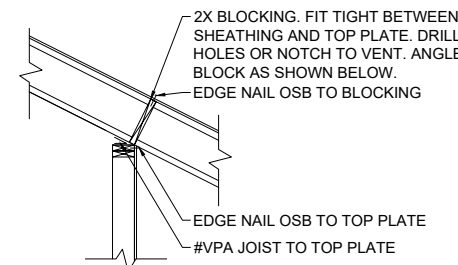


25 PERP. ROOF JOIST
SD2 NTS

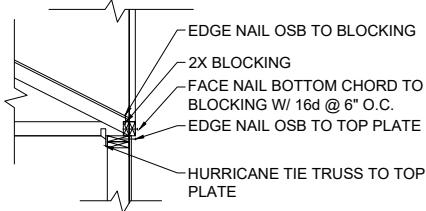


26 WALL TO TRUSSES
SD2 NTS

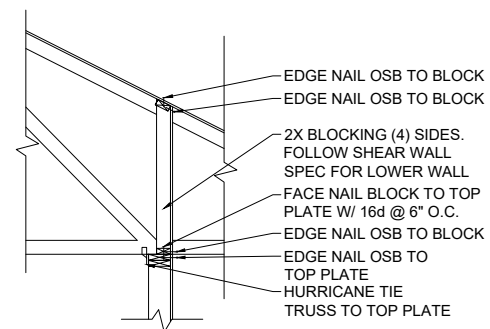



27 PERP. ROOF TRUSS
SD2 NTS




PLAN VIEW

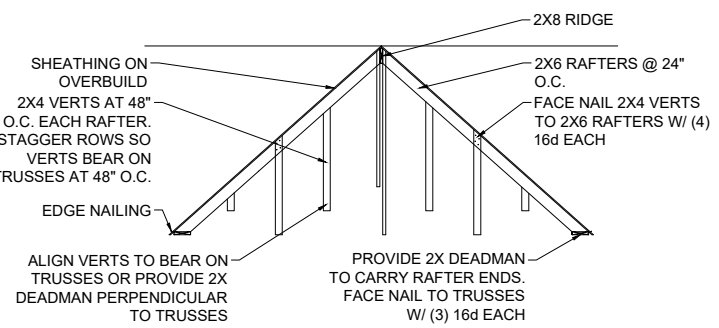


OVERBUILD FRAMING

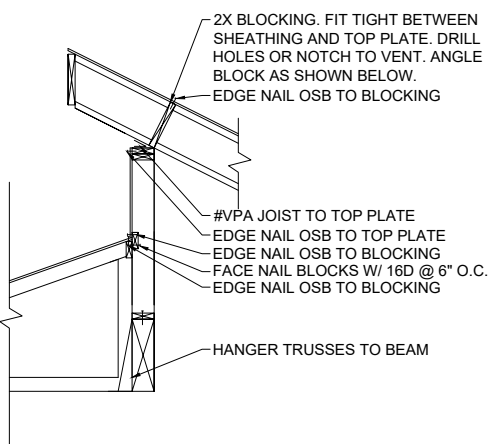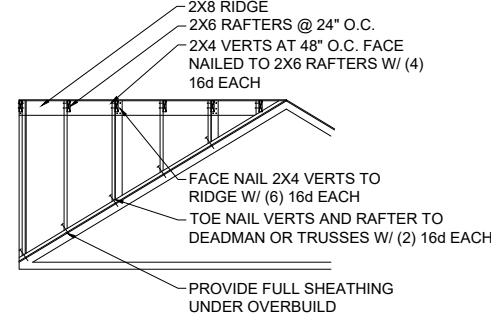


29 FRAMING SECTION
SD2 NTS

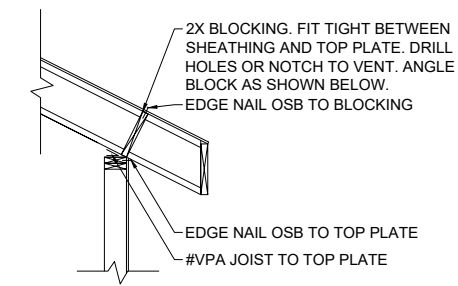

30 PERP. ROOF JOIST
SD2 NTS

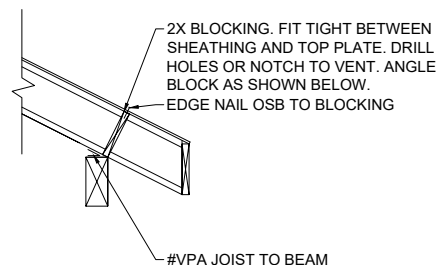

31 PERP. ROOF JOIST
SD2 NTS

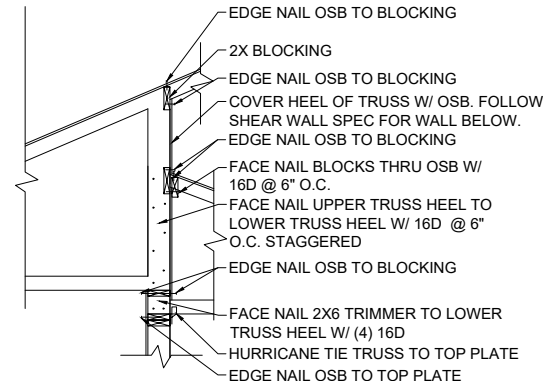

32 WALL TO TRUSSES
SD2 NTS



WHITE PINE ENGINEERING
- CIVIL STRUCTURAL -


www.whitepineeng.com

435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

DAVIDSON GASAWAY BURT NORTH LOGAN

1165 EAST 3100 NORTH
NORTH LOGAN, UTAH



DRAFTED BY: J. MICKELSON
DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL

SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

STRUCTURAL DETAILS

SD2

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025

DESIGN CRITERIA:

RISK CATEGORY:
DESIGN RISK CATEGORY: II
SNOW LOAD IMPORTANCE FACTOR (I_s): 1.0
SEISMIC IMPORTANCE FACTOR (I_e): 1.0

SEISMIC LOADS

S_s: 0.32
S_{Mi}: 0.80
S_{Ms}: 1.24
T_L: 6
R: 6.5
SITE CLASS: D (ASSUMED)
SDC: D

WIND LOADS

V (3 SEC GUST): 120 MPH
EXPOSURE CATEGORY: C
ELEVATION: 4620 FT

SNOW LOADS

P_G: 46 PSF
W_S: 6 PSF
C_e: 1.0
C_T: 1.0
C_S: 1.0
P_E: 32 PSF
P_S: 32 PSF

DEAD LOADS

ROOF: 15 PSF
FLOOR: 15 PSF
WALLS: 10 PSF
DECKS: 10 PSF
CONCRETE: 145 PSF

LIVE LOADS

ROOF: 20 PSF
FLOOR: 40 PSF
BEDROOM: 30 PSF
DECK: 60 PSF
GARAGE: 40 PSF

SOIL LOADS AND VALUES (ASSUMED):

SOIL BEARING PRESSURE: 1500 PSF
ACTIVE PRESSURE: 35 PCF
PASSIVE PRESSURE: 250 PCF
AT-REST PRESSURE: 60 PCF
*SEE NOTES FOR SOIL ASSUMPTIONS AS FOUND IN THE CONCRETE FOOTINGS & FOUNDATIONS SECTION, THIS PAGE
**ENGINEER ASSUMES STABLE SOIL CONDITIONS. IF THERE ARE ANY GLOBAL STABILITY CONCERNS, A GEOTECHNICAL REPORT IS REQUIRED.

GENERAL CONSTRUCTION NOTES:

- ALL CONSTRUCTION WORK SHALL FOLLOW THE STANDARDS FOUND IN THE INTERNATIONAL BUILDING CODE (IBC 2021), INTERNATIONAL RESIDENTIAL CODE (IRC 2021), AND THE NATIONAL DESIGN SPECIFICATIONS FOR WOOD CONSTRUCTION (NDS 2018).
- THE ENGINEERED DRAWINGS PROVIDED HEREIN WERE COMPLETED USING THE PROFESSIONAL STANDARD OF CARE REQUIRED BY THE GOVERNING MUNICIPALITY AND/OR STATE. THESE DRAWINGS, HOWEVER, DO NOT AND CAN NOT PROVIDE EVERY EXPLICIT ELEMENT OR CONDITION OF THE STRUCTURE. AS SUCH, CONTRACTOR SHALL PROVIDE INDUSTRY STANDARD GOOD CARE AND PRACTICE FOR MISCELLANEOUS ELEMENTS NOT SHOWN ON PLANS AND SHALL CONTACT ENGINEER FOR FURTHER INFORMATION IF REQUIRED.
- STRUCTURAL ENGINEERING PROVIDED HEREIN ASSUMES FINAL CONSTRUCTED CONDITION. CONTRACTOR SHALL BE RESPONSIBLE FOR STRUCTURAL INTEGRITY OF UNFINISHED STRUCTURE DURING ALL STAGES OF CONSTRUCTION. CONSTRUCTION LOADS SHALL NOT EXCEED DESIGN LIVE LOADS SHOWN IN DESIGN CRITERIA. CONTRACTOR SHALL PROVIDE BRACING OR SHORING AS NECESSARY TO SUPPORT UNFINISHED STRUCTURE.
- WHITE PINE ENGINEERING (WPE) ASSUMES NO LIABILITY FOR THE MEANS AND METHODS OF CONSTRUCTION PRACTICES. CONTRACTOR IS RESPONSIBLE FOR ALL MEANS OF CONSTRUCTION AND FOR JOBSITE SAFETY PER OSHA REGULATIONS
- CONTRACTOR SHALL BE RESPONSIBLE FOR RECEIVING APPROVAL AND ANY NECESSARY PERMITS FROM THE GOVERNING MUNICIPALITY PRIOR TO BEGINNING OF CONSTRUCTION.
- ANY OBSERVATIONS PROVIDED BY WPE DURING CONSTRUCTION SHALL BE CONSIDERED OBSERVATIONS LIMITED TO THE SCOPE REQUESTED, AND NOT FULL INSPECTIONS OR APPROVAL. THE GOVERNING MUNICIPALITY SHALL BE SOLELY RESPONSIBLE FOR INSPECTIONS AND APPROVAL OF FINAL CONSTRUCTION.
- CONTRACTOR SHALL INFORM ENGINEER OF ANY DISCREPANCIES BETWEEN ACTUAL CONDITIONS AND CONDITIONS ASSUMED ON THESE PLANS (I.E. DIMENSIONS, MATERIALS, ASSUMED LOADS, ETC).
- SHOP DRAWINGS FOR ANY PREMANUFACTURED STRUCTURAL ELEMENTS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF CONSTRUCTION AND SHALL BE SUBMITTED TO THE ENGINEER OF RECORD TO REVIEW IF DIMENSIONS OR OTHER ASPECTS OF SHOP DRAWINGS DIFFER FROM THOSE ON THESE PLANS.

CONCRETE FOOTINGS, FOUNDATIONS, AND SLABS

NOTES:

- CONCRETE SHALL MEET REQUIREMENTS OUTLINED IN THE BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE (ACI 318-19)
- LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM ALL FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 IN WITHIN THE FIRST 10 FT HORIZONTALLY FROM THE BUILDING.
- IMPERVIOUS SURFACES (I.E. CONCRETE, ASPHALT) SHALL BE SLOPED A MINIMUM OF 2% AWAY FROM THE BUILDING
- CONTRACTOR SHALL DAMP PROOF ALL CONCRETE WALLS THAT RETAIN EARTH OR HAVE ENCLOSED USABLE SPACES BY PLACING A BITUMINOUS COATING ON BELOW GRADE EXTERIOR SECTIONS OF FOUNDATION WALL OR WITH ANOTHER APPROVED DAMP PROOFING METHOD AS OUTLINED IN R406 OF THE IRC.
- FOUNDATION DRAINAGE SYSTEM IS NOT REQUIRED IF BACKFILLED WITH WELL-DRAINING BACKFILL OR SAND-GRAVEL MIXTURE SOILS OF GROUP 1 SOILS OF THE UNIFIED SOILS CLASSIFICATION SYSTEM AS SHOWN IN TABLE R405.1 OF THE IRC.
- ALL CONCRETE WALLS THAT RETAIN EARTH AND ANY FOUNDATION WALLS THAT ENCLOSE USABLE AREAS WITH GROUP II-GROUP IV SOILS OF THE UNIFIED SOILS CLASSIFICATIONS SYSTEM AS SHOWN IN TABLE R405.1 OF THE IRC SHALL HAVE A FOUNDATION DRAIN INSTALLED CONSISTING OF A PERFORATED DRAIN PIPE NOT LESS THAN 1' BEYOND THE OUTSIDE EDGE OF THE FOOTINGS AND 6" ABOVE THE TOP OF FOOTING WITH A GRAVEL DRAIN WRAPPED IN AN APPROVED FILTER FABRIC.
- ANY FOUNDATION WALLS THAT ENCLOSE USABLE SPACE WITH A HIGH WATER TABLE OR OTHER SEVERE GROUND WATER CONDITIONS SHALL BE WATERPROOFED AS REQUIRED IN SECTION R406.2 OF THE IRC.
- WPE ASSUMES STABLE SOIL CONDITIONS. CONTACT ENGINEER IF SOIL CONDITIONS DIFFER FROM THOSE ASSUMED. SEE DESIGN CRITERIA FOR ASSUMED VALUES. THESE VALUES SHALL BE REPLACED BY DATA INCLUDED IN A SITE SPECIFIC GEOTECHNICAL REPORT IF AVAILABLE.
- ANY FILL SOILS OR GRAVEL FILL THAT SUPPORT FOOTINGS AND FOUNDATIONS SHALL BE DESIGNED BY A LICENSED GEOTECHNICAL ENGINEER. FILL SOILS SHALL BE INSTALLED, AND TESTED IN ACCORDANCE WITH ACCEPTED ENGINEERING PRACTICE.
- WHERE QUANTIFIABLE DATA OR OBSERVATIONS INDICATE EXPANSIVE, COMPRESSIBLE, SHIFTING, QUESTIONABLE SOIL CHARACTERISTICS, OR GEOTECHNICAL HAZARDS ARE LIKELY TO BE PRESENT, THE BUILDING OFFICIAL SHALL DETERMINE WHETHER TO REQUIRE A SITE SPECIFIC GEOTECHNICAL STUDY.
- FROST DEPTH OF FOOTINGS SHALL BE MET AS SPECIFIED ON SHEET S1.0. NO FOOTINGS IN UNCONDITIONED SPACE SHALL BE CONSTRUCTED SHALLOWER THAN THE MINIMUM FROST DEPTH.
- CONCRETE SHALL BE MECHANICALLY VIBRATED WHEN PLACED TO AVOID HONEYCOMBING ALONG FORMS AND TO HELP CONCRETE FREELY FLOW AROUND REINFORCEMENT.
- CONCRETE SHALL NOT BE DROPPED MORE THAN 5' MAXIMUM DURING PLACEMENT.
- CONCRETE FOR FOUNDATION WALLS SHALL CURE A MINIMUM OF 7 DAYS AND HAVE INTERIOR SLAB INSTALLED PRIOR TO ANY BACKFILL. FOUNDATION WALLS GREATER THAN 4' IN HEIGHT ARE DESIGNED FOR TOP SUPPORT. CONTRACTOR SHALL INSTALL FLOOR OR ROOF DIAPHRAGM PRIOR TO BACKFILL AND SHALL NOT COMPACT ANY BACKFILL PLACED AROUND THESE WALLS.
- ALL FOUNDATIONS SHALL HAVE 6" MIN. EXPOSED ABOVE GRADE.
- CONTRACTOR SHALL ROUGHEN COLD JOINT BETWEEN FOOTING AND WALL TO ½" AMPLITUDE.
- INTERIOR AND EXTERIOR SLABS ON GRADE ARE NONSTRUCTURAL ELEMENTS. WPE PROVIDES NO DESIGN FOR INTERIOR OR EXTERIOR SLABS ON GRADE. CONSTRUCT SLABS PER SECTION R506 OF THE IRC.
- ALL SLABS ON GRADE SHALL HAVE CONTROL JOINTS IN SLAB AT 15' O.C. MAXIMUM SPACING.
- REINFORCING STEEL IN CONCRETE SHALL MEET THE REQUIREMENTS OF THE FOLLOWING SECTION ENTITLED "REINFORCING STEEL".
- ALL REINFORCEMENT IN CONCRETE SHALL BE PROPERTY TIED AND SECURED PRIOR TO POURING CONCRETE IN SUCH A WAY THAT REINFORCEMENT REMAINS IN DESIGNED LOCATION. VERTICAL REINFORCING STEEL FOR MASONRY CONSTRUCTION MAY BE FLOATED INTO PLACE.
- ANY COMPONENTS THAT ARE CAST IN PLACE SHALL BE SECURELY PLACED IN THE FORMS (I.E. STRAPS, BOLTS, SLEEVES, ETC.)
- REINFORCEMENT IN FOUNDATION WALLS SHALL BE CENTERED IN WALL U.N.O. REINFORCEMENT FOR CONCRETE WALLS RETAINING EARTH SHALL BE PLACED WHERE DESIGNED ON PLANS.
- ENGINEER ASSUMES 2,500 PSI COMPRESSIVE STRENGTH IN STRUCTURAL CONCRETE, THEREFORE CONCRETE FOR FOOTINGS, FOUNDATION WALLS, AND SLABS CAN BE EXEMPT FROM SPECIAL INSPECTIONS ACCORDING TO EXEMPTIONS LISTED IN SECTION 1705.3 IN THE IBC UNLESS NOTED OTHERWISE.
- CONCRETE SHALL NOT BE PLACED ON FROZEN GROUND AND KEPT FROM FREEZING WITHIN THE FIRST 48 HOURS OF PLACEMENT.
- CONCRETE SHALL NOT BE PLACED IN WATER WITHOUT PRIOR CONSULTATION FROM ENGINEER.

CONCRETE SPECIFICATIONS			
STRUCTURAL ELEMENT	MIN. COMPRESSIVE STRENGTH (f'c)	AIR CONTENT	MAXIMUM W/C RATIO
FOUNDATION WALLS AND FOOTINGS, NOT EXPOSED TO WEATHER	3000 PSI	5%-7%(1)	.55
SLABS (EXCLUDING GARAGE SLABS)	3000 PSI	5%-7%(1)	.55
WALLS, EXPOSED TO WEATHER	3000 PSI	5%-7%	.45
SLABS EXPOSED TO WEATHER (INCLUDING GARAGE AND SUSP SLABS)	3500 PSI	5%-7%	.45

NOTES TO TABLE ABOVE:

- AIR ENTRAINMENT ONLY REQUIRED IN CONCRETE NOT EXPOSED TO WEATHER IF EXPOSED TO FREEZE/THAW DURING CONSTRUCTION PROCESS.
- f'c IS CONCRETE COMPRESSIVE STRENGTH AT 28-DAYS
- PORTLAND CEMENT TYPE I/II
- W/C RATIO BASED ON ALL CEMENTITIOUS AND SUPPLEMENTARY CEMENTITIOUS MATERIAL IN CONCRETE MIXTURE.
- CONCRETE SHALL NOT INCLUDE CALCIUM CHLORIDE ADMIXTURE
- NOMINAL MAXIMUM AGGREGATE SIZE OF ¾" AND SHALL CONFORM TO ASTM C33
- CONCRETE MIXTURE MAY HAVE A MAXIMUM OF 25% BY MASS OF FLY ASH OR OTHER NATURAL POZZOLANS CONFORMING TO ASTM C618
- SEE SECTION R404.1.3.3.4 (IRC 2021) FOR SLUMP REQUIREMENTS. SLUMP OF CONCRETE SHALL BE ADEQUATE TO PROVIDE WORKABILITY AROUND REINFORCEMENT.
- REFERENCE TABLE R402.2 OF THE IRC AND TABLE 19.3.2.1 OF THE ACI 318

ANCHOR BOLTS

NOTES:

- ANCHORING OF SILL PLATES TO FOUNDATION SHALL FOLLOW SECTION 2308.3 (IBC 2021)
- ANCHOR BOLTS SHALL BE A MINIMUM OF ½" DIAMETER X 10" LONG "J" BOLTS @ 32" O.C. ANCHOR BOLTS SHALL BE GRADE A307 AND SHALL HAVE 7" MINIMUM EMBEDMENT IN CONCRETE. SEE SHEAR WALL SCHEDULE FOR SHEAR WALL SPECIFIC ANCHOR BOLT SPACING.
- ANCHOR BOLTS SHALL BE LOCATED WITHIN THE MIDDLE THIRD OF THE SILL PLATE.
- EACH SECTION OF FOUNDATION WALL SHALL HAVE A MINIMUM OF (2) ANCHOR BOLTS (ONE ON EACH END). PROVIDE EDGE ANCHOR BOLTS WITHIN FIRST FOOT OF FOUNDATION SECTION WHEN STEPPED.
- PROVIDE 3" X 3" X 0.229" PLATE WASHER FOR EACH ANCHOR BOLT. DIAGONALLY SLOTTED HOLE IN PLATE WASHER ALLOWED TO BE ⅝" WIDER THAN ANCHOR BOLT DIAMETER NOT TO EXCEED 1 ¾" IF A STANDARD CUT WASHER IS PLACED BETWEEN THE PLATE WASHER AND NUT.
- ½" DIA. X 6-1/2" LONG SIMPSON TITEN HD BOLTS @ SPACING MATCHING SHEAR WALL SCHEDULE MAY BE SUBSTITUTED FOR ANCHOR BOLT SPECIFICATION ABOVE

REINFORCING STEEL:

NOTES:



- PLACEMENT OF REINFORCING STEEL SHALL MEET REQUIREMENTS OF CHAPTER 25 OF ACI 318-19.
- ALL REINFORCING STEEL SHALL CONFORM TO ASTM A-615 GRADE 60 (Fy = 60 KSI).
- REINFORCING STEEL SHALL NOT BE WELDED UNLESS SPECIFIED ON THE PLANS. REINFORCING STEEL THAT IS WELDED SHALL BE ASTM A706 GRADE 60.
- REINFORCING WELDED WIRE FABRIC SHALL CONFORM TO ASTM STANDARD A-185.
- ALL REINFORCING STEEL DIMENSIONS SHALL BE TO CENTER OF BAR UNLESS DIMENSION IS SPECIFIED AS "CLEAR" OR "CLR" IN WHICH CASE THE DIMENSION IS TO EDGE OF REBAR.
- EDGE DISTANCE, HOOK AND BEND RADII, AND REBAR LAP LENGTHS SHALL MEET THE FOLLOWING REQUIREMENTS ON THIS SHEET AND THE REQUIREMENTS IN THE ACI 318.
- REINFORCING IN FOUNDATION WALLS AND AROUND OPENINGS SHALL MEET REQUIREMENTS OF THE FOUNDATION SCHEDULE SHOWN ON S1.0 AND THE UTAH AMENDMENT TO THE CODE 15A-3-108.
- ON CENTER (O.C.) SPACING SHOWN ON PLANS SHALL BE MAXIMUM SPACING ALLOWABLE.
- BARS SHALL BE LAPPED A MINIMUM OF 40 BAR DIAMETERS (d_b) TO MEET DEVELOPMENT LENGTH. DEVELOPMENT LENGTH ASSUMES UNEPOXIED REBAR AND NORMAL WEIGHT CONCRETE. CONTACT ENGINEER FOR OTHER CONDITIONS IF NEEDED.

REBAR CONCRETE COVERAGE DISTANCES		
EXPOSURE CONDITION	BAR SIZE OR MEMBER	REBAR CLR DISTANCE (MIN.)
CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH	ANY	3"
EXPOSED TO WEATHER	#5 AND SMALLER	1-1/2"
	#6 AND LARGER	2"
NOT EXPOSED TO WEATHER OR IN CONTACT WITH GROUND	#14 AND # 18; SLABS, JOISTS, AND WALLS	1-1/2"
	#11 AND SMALLER; SLABS, JOISTS, AND WALLS	3/4"
	ALL SIZE BARS; BEAMS, COLUMNS, AND TENSION TIES	1-1/2"




NOTES TO TABLE ABOVE:

- SEE TABLE 20.5.1.3.1 ACI 318-19
- ALL SLAB ON GRADE REINFORCEMENT SHALL BE CENTERED IN SLAB UNLESS NOTED OTHERWISE

STANDARD HOOK GEOMETRY OF DEFORMED BARS IN TENSION (SEE ACI 318-19 TABLE 25.3.1 FOR ALL BAR SIZES AND REQUIREMENTS)

TYPE OF HOOK	BAR SIZE	MIN. INSIDE DIAMETER	STRAIGHT EXTENSION MIN. (l _{ext})	TYPE OF HOOK
90° HOOK	#3-#8	6d _b	12d _b	
180° HOOK	#3-#8	6d _b	GREATER OF 4d _b and 2.5"	

STANDARD HOOK GEOMETRY FOR STIRRUPS, TIES AND HOOPS (SEE ACI 318-19 TABLE 25.3.2 FOR ALL BAR SIZES AND REQUIREMENTS)

TYPE OF HOOK	BAR SIZE	MIN. INSIDE DIAMETER	STRAIGHT EXTENSION MIN. (l _{ext})	TYPE OF HOOK
90° HOOK	#3-#5	4d _b	GREATER OF 6d _b and 3"	
135° HOOK	#3-#5	4d _b	GREATER OF 6d _b and 3"	
180° HOOK	#3-#5	4d _b	GREATER OF 6d _b and 3"	

NOTES TO TABLE ABOVE:

- A LONGER STRAIGHT EXTENSION IS ALLOWABLE BUT DOES NOT INCREASE ANCHORAGE CAPACITY
- MINIMUM DEVELOPMENT LENGTH SHALL BE 40 BAR DIAMETERS (d_b)



WHITE PINE ENGINEERING

- CIVIL STRUCTURAL -

www.whitepineeng.com

435-515-0126

jackson@whitepineeng.com

tom@whitepineeng.com


P.O. BOX 669

HYDE PARK, UTAH

84318

DAVIDSON GASAWAY BURT NORTH LOGAN

1165 EAST 3100 NORTH
NORTH LOGAN, UTAH



DRAFTED BY: J. MICKELSON

DESIGNED BY: J. SAGERS

CHECKED BY: T. HILL

SCALE:

1/8" = 1'-0" (PRINTED ON 11X17)

1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

STRUCTURAL NOTES
AND SCHEDULES

SD3

MINIMUM NAILING SCHEDULE (IBC 2304.10.2)					
No.	BUILDING ELEMENT	No.	SIZE	SPACING	LOCATION
1.1	BLOCKING BETWEEN CEILING JOISTS, RAFTERS, OR TRUSSES TO TOP PLATE OR OTHER FRAMING BELOW	(4)	8d	-	EACH END, TOENAIL
1.2	BLOCKING BETWEEN RAFTERS OR TRUSS NOT AT THE WALL TOP PLATE, TO RAFTER OR TRUSS	(2)	16d	-	END NAIL
8	STUD TO STUD (NOT AT BRACED WALL PANELS)	-	16d	24" O.C.	FACE NAIL
9	STUD TO STUD AND ABUTTING STUDS AT INTERSECTING WALL CORNERS (AT BRACED WALL PANELS)	-	16d	12" O.C.	FACE NAIL
10	BUILT-UP HEADER (2" TO 2" HEADER)	-	16d	12" O.C.	EACH EDGE, FACE NAIL
11	CONTINUOUS HEADER TO STUD	(5)	8d	-	TOENAIL
12	TOP PLATE TO TOP PLATE	-	16d	16" O.C.	FACE NAIL
13	TOP PLATE TO TOP PLATE, AT END JOINTS (MINIMUM 24" LAP SPLICE LENGTH EACH SIDE OF END JOINT)	(12)	16d	-	EACH SIDE OF END JOINT, FACE NAIL
14	BOTTOM PLATE TO JOIST, RIM JOIST, BAND JOIST OR BLOCKING (NOT AT BRACE WALL PANELS)	-	16d	12" O.C.	FACE NAIL
15	BOTTOM PLATE TO JOIST, RIM JOIST, BANDS JOIST, OR BLOCKING AT BRACE WALL PANELS	(3)	16d	16" O.C.	FACE NAIL
16	STUD TO TOP OR BOTTOM PLATE	(2)	16d	-	END NAIL
17	TOP PLATES, LAPS AT CORNERS AND INTERSECTIONS	(2)	16d	-	FACE NAIL
21	JOIST TO SILL, TOP PLATE, OR GIRDER	(4)	8d	-	TOENAIL
22	RIM JOIST, BAND JOIST, OR BLOCKING TO TOP PLATE, SILL, OR OTHER FRAMING BELOW	-	8d	4" O.C.	TOENAIL
26	BUILT-UP GIRDERS AND BEAMS, 2" LUMBER LAYERS	(2)	16d	12" O.C.	FACE NAIL
28	JOIST TO BAND JOIST OR RIM JOIST	(3)	16d	-	END NAIL
29	BRIDGING OR BLOCKING TO JOIST, RAFTER, OR TRUSS	(2)	8d	-	EACH END, TOENAIL

LOCATIONS REQUIRING PRESERVATIVE-TREATED OR NATURALLY DURABLE WOOD

- NOTES:
- WOOD JOISTS/FLOORS CLOSER THAN 18" AND WOOD GIRDERS CLOSER THAN 12" TO EXPOSED GROUND IN CRAWL SPACES OR UNEXCAVATED AREAS WITHIN THE PERIMETER OF THE BUILDING FOUNDATION.
 - WOOD FRAMING MEMBERS IN CONTACT W/ THE EXTERIOR FOUNDATION WALLS AND ARE LESS THAN 8" FROM EXPOSED EARTH.
 - WOOD FRAMING MEMBERS AND FURRING STRIPS IN DIRECT CONTACT W/ MASONRY OR CONCRETE.
- *WOOD USED IN THE LOCATIONS SPECIFIED SHALL BE NATURALLY DURABLE OR PRESERVATIVE-TREATED IN ACCORDANCE W/ AWPA U1.
- **FASTENERS INCLUDING NUTS AND WASHERS, IN CONTACT WITH PRESERVATIVE-TREATED WOOD SHALL BE OF HOT-DIPPED ZINC-COATED GALVANIZED STEEL, STAINLESS STEEL, SILICON BRONZE OR COPPER. STAPLES SHALL BE OF STAINLESS STEEL. FASTENERS OTHER THAN NAILS, STAPLES, TIMBER RIVETS, WOOD SCREWS AND LAG SCREWS SHALL BE PERMITTED TO BE OF MECHANICALLY DEPOSITED ZINC-COATED STEEL.

SHEAR WALL SCHEDULE								
MARK	SHEATHING	EDGE NAILING	EDGE STAPLING	EDGE MEMBER	FIELD NAILING	FIELD STAPLING	FIELD MEMBER	ANCHOR BOLT SPACING
SW-6"	7/16" OSB, 1 SIDE	8d @ 6" O.C.	1-1/2" LONG 16 GAUGE @ 3" O.C.	(1) 2X	8d @ 12" O.C.	1-1/2" LONG 16 GAUGE @ 6" O.C.	(1) 2X	1/2" DIA X 10" L @ 32" O.C.
SW-4"	7/16" OSB, 1 SIDE	8d @ 4" O.C.	1-1/2" LONG 16 GAUGE @ 2" O.C.	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	1-1/2" LONG 16 GAUGE @ 6" O.C.	(1) 2X	1/2" DIA X 10" L @ 32" O.C.
SW-3"	7/16" OSB, 1 SIDE	8d @ 3" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 24" O.C.
SW-2"	7/16" OSB, 1 SIDE	8d @ 2" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 3" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 16" O.C.
(2)SW-4"	7/16" OSB, BOTH SIDES	8d @ 4" O.C.	1-1/2" LONG 16 GAUGE @ 2" O.C.	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	1-1/2" LONG 16 GAUGE @ 6" O.C.	(1) 2X	1/2" DIA X 10" L @ 16" O.C.
(2)SW-3"	7/16" OSB, BOTH SIDES	8d @ 3" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 4" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 12" O.C.
(2)SW-2"	7/16" OSB, BOTH SIDES	8d @ 2" O.C.	N/A	(1) 3X OR (2) 2X W/ 16d @ 3" O.C.	8d @ 12" O.C.	N/A	(1) 2X	1/2" DIA X 10" L @ 8" O.C.

- NOTES TO TABLE ABOVE:
- STUDS SHALL BE DF-L @ 16" O.C.
 - NAILS SHALL BE CARBON STEEL SMOOTH SHANK 8d COMMON OR 8d GALVANIZED BOX. GALVANIZED NAILS SHALL BE HOT-DIPPED OR MECHANICALLY DEPOSITED.
 - STAPLES SHALL HAVE A MINIMUM CROWN WIDTH OF 7/16" AND SHALL BE INSTALLED WITH THEIR CROWNS PARALLEL TO THE LONG DIMENSION OF THE FRAMING MEMBERS.
 - NAILS/STAPLES SHALL BE DRIVEN WITH THE HEAD/CROWN OF THE NAIL/STAPLE FLUSH WITH THE SURFACE OF THE SHEATHING.
 - DOUBLE SIDED SHEAR WALLS SHALL HAVE PANEL JOINTS OFFSET TO FALL ON DIFFERENT FRAMING MEMBERS. NAILS AT PANEL EDGES SHALL BE STAGGERED.
 - BLOCK ALL PANEL EDGES. FLAT BLOCKING IS ACCEPTABLE ON SINGLE SIDED SHEAR WALLS.
 - ALL WALLS SHALL FOLLOW SW-6" U.N.O.
 - STRUCTURAL PANELS SHALL BE APA APPROVED, EXPOSURE 1, AND MEET THE REQUIREMENTS OF USDOC PS 2.
 - NAILS SHALL BE LOCATED AT LEAST 3/8" FROM THE PANEL EDGES.
 - PANELS SHALL NOT BE LESS THAN 4'X8' EXCEPT AT BOUNDARIES AND CHANGES IN FRAMING. ALL EDGES OF ALL PANELS SHALL BE SUPPORTED BY AND FASTENED TO FRAMING MEMBERS OR BLOCKING.
 - ANCHOR BOLTS SHALL HAVE A STEEL PLATE WASHER UNDER EACH NUT NOT LESS THAN 0.229"X3"X3" IN SIZE. THE HOLE IN THE PLATE WASHER SHALL BE PERMITTED TO BE DIAGONALLY SLOTTED WITH A WIDTH OF UP TO 3/16" LARGER THAN THE BOLT DIAMETER AND A SLOT LENGTH NOT TO EXCEED 1-3/4", PROVIDED A STANDARD CUT WASHER IS PLACED BETWEEN THE PLATE WASHER AND THE NUT. THE PLATE WASHER SHALL EXTEND TO WITHIN 1/2" OF THE EDGE OF THE. BOTTOM PLATE ON THE SIDE(S) WITH SHEATHING.

FRAMING

- NOTES:
- FULL HEIGHT SOLID BLOCKING REQUIRED AT ALL BEARING POINTS OF TRUSSES, RAFTERS, AND JOISTS.
 - WALLS SHALL BE BALLOON FRAMED (CONTINUOUS STUDS FROM FOUNDATION TO ROOF) EXCEPT WHERE Laterally SUPPORTED BY A FLOOR OR ROOF DIAPHRAGM.
 - ALL LUMBER SHALL MEET PLANS SPECIFICATIONS AND BE GRADED AND STAMPED BY AN APPROVED AGENCY (I.E. APA, WWPA, ETC.)
 - BEAMS ON PLAN ARE SIZED AS A MINIMUM. LARGER SIZES AND HIGHER GRADES MAY REPLACE MEMBERS ON PLAN.
 - FLOOR BEAMS MAY BE FLUSH MOUNTED OR DROP BEAMS.
 - BEAMS CONSISTING OF (4) OR MORE PLYS SHALL BE FASTENED W/ (2) ROWS OF 1/2" DIA THRU BOLTS @ 12" O.C. 2" FROM TOP AND 2" FROM BOTTOM OF BEAM.
 - HOLES FOR BOLTS SHALL BE A MINIMUM OF 1/32" TO A MAXIMUM OF 1/16" LARGER THAN THE BOLT DIAMETER. A STANDARD CUT WASHER SHALL BE PROVIDED BETWEEN THE WOOD AND THE BOLT HEAD AND BETWEEN THE WOOD AND THE NUT.
 - LEAD HOLES FOR LAG SCREWS SHALL BE BORED AS FOLLOWS
 - THE CLEARANCE HOLE FOR THE THE SHANK SHALL HAVE THE SAME DIAMETER AS THE SHANK AND THE SAME DEPTH OF PENETRATION AS THE LENGTH OF UNTHREADED SHANK.
 - THE LEAD HOLE FOR THE THREADED PORTION SHALL HAVE A DIAMETER EQUAL TO 40%-70% OF THE SHANK DIAMETER AND A LENGTH EQUAL TO AT LEAST THE LENGTH OF THE THREADED PORTION. THE LARGER PERCENTILE SHALL APPLY TO LAG SCREWS OF GREATER DIAMETERS.
 - POSTS AND WALLS SHALL BE CENTERED ON CONTINUOUS AND SPOT FOOTINGS U.N.O.
 - SQUASH BLOCKING AND LOWER COLUMNS SHALL BE PROVIDED TO CARRY ALL COLUMN LOADS TO FOOTINGS AND FOUNDATIONS. SQUASH BLOCKING AND LOWER COLUMNS SHALL BE ALIGNED W/ AND MATCH UPPER COLUMN SIZE U.N.O.
 - BUILT UP 2X COLUMNS SHALL BE FACE NAILED TOGETHER W/ 16d @ 4" O.C STAGGERED EACH PLY.
 - COLUMNS SHALL SUPPORT FULL WIDTH OF BEAM ENDS.
 - ENGINEERED WOOD RIM BOARDS SHALL CONFORM TO ANSI/APA PRR 410 OR SHALL BE EVALUATED IN ACCORDANCE W/ ASTM D7672.
 - WHERE THE DBL TOP PLATE LAP AND NAILING REQUIREMENTS PER IBC2304.10.2 No. 13 ARE NOT MET, PROVIDE #CS16 W/ 12" LAP MIN.
 - WOOD CONSTRUCTION CONNECTORS SHALL BE INSTALLED PER THE MANUFACTURER'S SPECIFICATIONS.

TRUSS AND JOIST

- NOTES:
- PRE-MANUFACTURED TRUSSES SHALL FOLLOW LAYOUT SHOWN ON PLANS. ANY CHANGES IN TRUSS LAYOUT SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
 - CONTRACTOR AND MANUFACTURER SHALL VERIFY CEILING HEIGHTS, TRAYS, VAULTS, AND STEPS PRIOR TO CONSTRUCTION.
 - MULTI PLY TRUSSES OR JOISTS SHALL BE FASTENED PER MANUFACTURER'S SPECIFICATIONS.
 - TRUSSES AND JOISTS SHALL BE BRACED PER MANUFACTURER.
 - PROVIDE WEB STIFFENERS ON JOISTS WHEN REQUIRED BY MANUFACTURER.
 - NO ALTERATIONS OF TRUSSES OR JOISTS ARE ALLOWED WITHOUT APPROVAL FROM MANUFACTURER.
 - PROVIDE HURRICANE TIE EACH END OF EVERY ROOF TRUSS/RAFTER TO TOP PLATE.
 - #H2.5A OR #H1 FOR STANDARD TRUSSES AND BEVELED RAFTERS
 - #H1 OR #H10A FOR ATTIC AND TALL HEEL TRUSSES
 - #VPA_ FOR NON BEVELED RAFTERS

STEEL

- NOTES:
- W SECTIONS SHALL COMPLY W/ ASTM A992 AND HAVE Fy=50 KSI MIN. AND Fu=65 KSI MIN.
 - HSS RECTANGULAR SECTIONS SHALL COMPLY W/ ASTM A500 GRADE C AND HAVE Fy=50 KSI MIN. AND Fu=62 KSI MIN.
 - C AND L SECTION SHALL COMPLY W/ ASTM A36 AND HAVE Fy=36 KSI MIN. AND Fu=58 KSI MIN.
 - ALL WELDS ARE 1/4" FILLET CONFORMING TO THE REQUIREMENTS IN AWS D1.1 W/ AN ELECTRODE Fexx=70 KSI U.N.O.
 - ALL STRUCTURAL STEEL BOLTS SHALL COMPLY W/ A307 GRADE A AND HAVE Fnt=45 KSI AND Fnv=27 KSI U.N.O.
 - ALL WIDE FLANGE BEAMS SHALL HAVE 3/8" WEB STIFFENER EACH SIDE AT BEARING LOCATIONS U.N.O.
 - WHERE LEVELING NUTS ARE USED UNDER BASE PLATES, NON SHRINK GROUT SHALL FILL THE VOID BETWEEN CONCRETE AND STEEL. GROUT SHALL BE RATED FOR 5000 PSI MIN.
 - WOOD NAILERS ON BEAMS SHALL BE 2X OR 3X W/ 1/2" DIA BOLTS SPACED AT 32" O.C. MIN.

EPOXY

- NOTES:
- EPOXY SHALL BE SIMPSON SET-XP U.N.O.
 - DRILL AND CLEAN HOLE PER MANUFACTURER SPECIFICATIONS.
 - HOLE SHALL BE FREE OF DUST, DEBRIS, AND STANDING WATER PRIOR TO EPOXY INSTALLATION.

DIAPHRAGM/SHEATHING SCHEDULE				
LOCATION	NOMINAL THICKNESS	SPAN RATING	EDGE NAILING	FIELD NAILING
ROOF W/ DESIGN SNOW LOAD UP TO 40 PSF	7/16"	24/16	8d @ 6" O.C.	8d @ 12" O.C.
ROOF W/ DESIGN SNOW LOAD UP TO 120 PSF	19/32"	40/20	10d @ 6" O.C.	10d @ 12" O.C.
FLOOR	3/4" TONGUE AND GROOVE	48/24	10d @ 6" O.C.	10d @ 12" O.C.

- NOTES TO TABLE ABOVE:
- ROOF AND FLOOR FRAMING MEMBERS SHALL BE PLACED NO FURTHER THAN 24" O.C.
 - NAILS SHALL BE CARBON STEEL SMOOTH SHANK COMMON OR GALVANIZED BOX. GALVANIZED NAILS SHALL BE HOT-DIPPED OR MECHANICALLY DEPOSITED.
 - NAILS SHALL BE DRIVEN WITH THE HEAD OF THE NAIL FLUSH WITH THE SURFACE OF THE SHEATHING.
 - STRUCTURAL PANELS SHALL BE APA APPROVED, EXPOSURE 1, AND MEET THE REQUIREMENTS OF USDOC PS 2.
 - FLOOR SHEATHING SHALL BE GLUED TO FRAMING MEMBERS PRIOR TO NAILING W/ AN ADHESIVE CONFORMING TO APA SPECIFICATIONS.
 - STRENGTH AXIS (LONG DIRECTION) OF PANELS SHALL BE ORIENTED PERPENDICULAR TO FRAMING MEMBERS AND PANEL END JOINTS SHALL BE STAGGERED.
 - NAILS SHALL BE LOCATED AT LEAST 3/8" FROM THE EDGES OF PANELS.
 - 1-1/2" LONG 16 GAGE STAPLES W/ 7/16" CROWN MAY BE SUBSTITUTED FOR 8d NAILS AT HALF THE SPACING FOR 7/16" PANELS ONLY. CROWNS MUST BE INSTALLED PARALLEL TO FRAMING MEMBERS.
 - PANELS SHALL NOT BE LESS THAN 4'X8' EXCEPT AT BOUNDARIES AND CHANGES IN FRAMING WHERE MINIMUM PANEL DIMENSION SHALL BE 24" UNLESS ALL EDGES OF THE UNDERSIZED PANELS ARE SUPPORTED BY AND FASTENED TO FRAMING MEMBERS OR BLOCKING.

STUD HEIGHT SCHEDULE		
SIZE/TYPE	SPACING	MAX HEIGHT
2X4 DF-L #2	16" O.C.	10'-0"
2X4 DF-L #2	12" O.C.	12'-0"
2X6 DF-L #2	16" O.C.	14'-0"
2X6 DF-L #2	12" O.C.	16'-0"
2X6 DF-L #2	8" O.C.	18'-0"
2X6 LSL	16" O.C.	16'-0"
2X6 LSL	12" O.C.	18'-0"

- NOTES TO TABLE ABOVE:
- CONTACT ENGINEER FOR OTHER STUDS AND SPACING.
 - 2X6 LSL STUDS SHALL BE 1-3/4" X 5-1/2" W/ E=1.55X10^6 PSI MIN.

CHIMNEY FRAMING

- NOTES:
- PROVIDE STUDS SIZED FROM STUD HEIGHT SCHEDULE USING THE DISTANCE FROM ROOF SHEATHING TO TOP OF CHIMNEY AND 1/2 THE MAX HEIGHT SHOWN ON SCHEDULE.
 - SHEET ALL CHIMNEY SIDES PER SW-6" SCHEDULE U.N.O.
 - HORIZONTAL STRAP CHIMNEY TO ROOF BLOCKING BETWEEN TRUSS TOP CHORDS OR TO TRUSS TO CHORD W/ #CS16 W/ 12" LAP EACH CORNER EACH DIRECTION.
 - TRUSSES SHALL BE DESIGNED TO CARRY VERTICAL LOADS FROM CHIMNEY.
 - (3) STUDS SHALL BE PROVIDE AT EACH CORNER OF THE CHIMNEY.
 - STUDS MAY BE SPLICED WITH FULL LENGTH STUDS FACE NAILED TOGETHER W/ 16d @ 6" O.C. STAGGERED.
 - IF CHIMNEY FRAMING DOES NOT EXTEND FROM TOP OF CHIMNEY TO FLOOR, THEN 2X DEAD MAN BLOCKS MAY BE LAID FLAT ON ROOF SHEATHING AND EDGE NAILED PER SW-6" AND #CS16 VERTICAL STRAPS W/ 12" LAP SHALL BE PLACED AT EACH CORNER DOWN AROUND (2)2X6 X 8' BLOCKING (EXTENDING UNDERNEATH 4 TRUSS TOP CHORDS) AND BACK UP TO NAIL ONTO OTHER SIDE OF CORNER STUDS.
 - CHIMNEY WALLS SHALL NOT EXCEED 3.5:1 HEIGHT TO WIDTH RATIO.

Reviewed for Code Compliance
Hyde Park Building Dept
09/03/2025



WHITE PINE ENGINEERING
- CIVIL STRUCTURAL -
www.whitepineeng.com

435-515-0126
jackson@whitepineeng.com
tom@whitepineeng.com

P.O. BOX 669
HYDE PARK, UTAH
84318

DAVIDSON GASAWAY BURT NORTH LOGAN

1165 EAST 3100 NORTH
NORTH LOGAN, UTAH



DRAFTED BY: J. MICKELSON
DESIGNED BY: J. SAGERS
CHECKED BY: T. HILL

SCALE:
1/8" = 1'-0" (PRINTED ON 11X17)
1/4" = 1'-0" (PRINTED ON 22X34)

SHEET TITLE:

STRUCTURAL NOTES
AND SCHEDULES
SD4